


Photoelectric Sensors BOS 18KW-NA-1PD-C-02 Order Code: BOS00L5



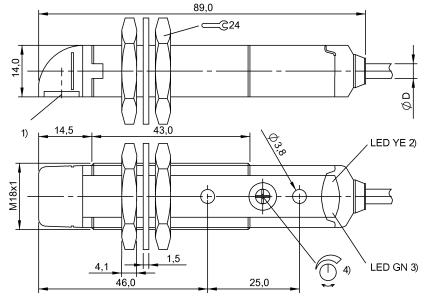



1) Optical axis, 2) Output function, 3) Stability, 4) Sn



Display/Operation

Adjuster	Potentiometer 270°
Display	Output function- LED yellow
	Stability - LED green
Setting	Rated switching distance (Sn)

Electrical connection

Cable diameter D	4.00 mm
Cable length L	2 m
Conductor cross-section	0.14 mm ²
Connection	Cable, 2.00 m, PVC
Number of conductors	4
Polarity reversal protected	yes
Short-circuit protection	yes

Electrical data

No-load current lo max. at Ue	35 mA
Operating voltage Ub	1030 VDC
Rated insulation voltage Ui	75 V DC
Rated operating current le	100 mA
Rated operating voltage Ue DC	24 V
Ripple max. (% of Ue)	8 %
Switching frequency	1000 Hz
Turn-off delay toff max.	0.5 ms
Turn-on delay ton max.	0.5 ms
Voltage drop Ud max. at le	2 V

Environmental conditions

Ambient temperature	-2555 °C		
EN 60068-2-27, Shock	Half-sinus, 30 gn, 11 ms, 3x6		
EN 60068-2-6, Vibration	1055 Hz, amplitude 0.5 mm,		
	3x30 min		
IP rating	IP67		
Functional safety			
MTTF (40 °C)	774 a		
General data			
Approval/Conformity	CE		
	cULus		
	EAC		
	WEEE		
Basic standard	IEC 60947-5-2		
Principle of operation	Photoelectric sensor		
Series	18KW		
Style	Flat cylinder		
	Optics 90°		
Trademark	Global		
Material			
Housing material	PBT		
Material jacket	PVC		
Material sensing surface	PMMA		

Photoelectric Sensors BOS 18KW-NA-1PD-C-02 Order Code: BOS00L5



Mechanical data

Output/Interface

Dimension	Ø 18 x 89 mm	Switching output	NPN normally open (NO)
Mounting	Screw M3		NPN NC Pins 4-2
	Nut M18x1		
Tightening torque max.	1.5 Nm	Range/Distance	
Ontinal data		Range	0400 mm
Optical data		Rated operating distance Sn	400 mm Adjustable
Ambient light max.	5000 Lux		
Beam characteristic	Divergent		
Light type	LED infrared		
Principle of optical operation	Diffuse sensor, energetic		
Switching function, optical	Light-on		
Wave length	880 nm		

Remarks

Reference object (target): gray card, 200 x 200, 90 % remission, axial approach.

The sensor is functional again after the overload has been eliminated.


For additional information, refer to user's guide.

Order accessories separately.

For further information about the MTTF and B10d see MTTF / B10d certificate

Indication of the MTTF- / B10d value does not represent a binding composition and/or life expectancy assurance; these are simply experiential values with no warranty implications. These declared values also do not extend the expiration period for defect claims or affect it in any way.

Wiring Diagrams



Opto Symbols

