




1) Reference edge, 2) Sealing ring, 3) Function indicator FD/FE/LL, 4) Cable passage, 5) Mark. Safety switch position

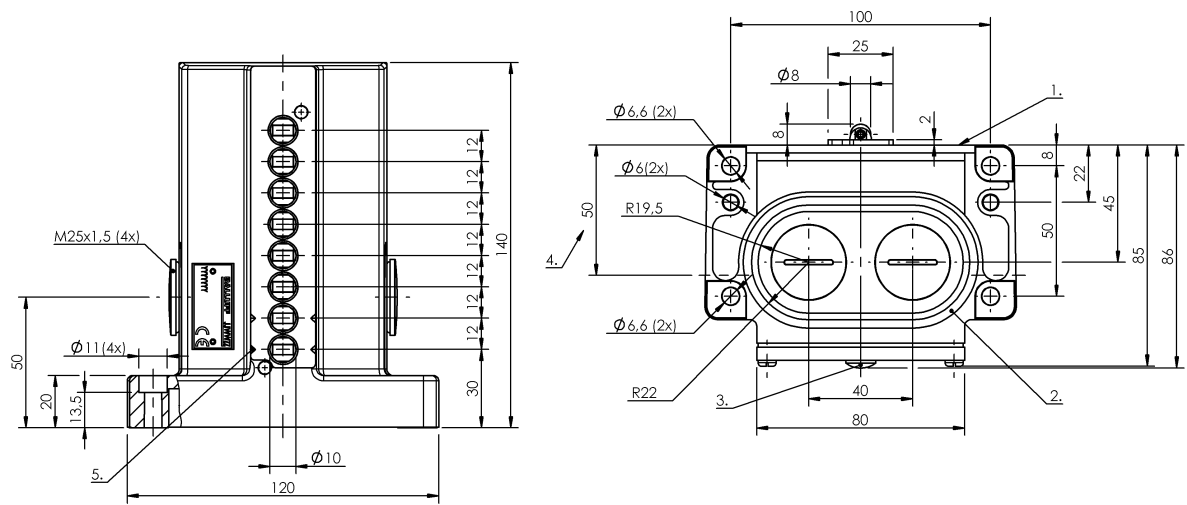

Display/Operation

Function indicator 1-8. Switch position: FD - 6...60 V

Electrical connection

Connection type 1-8. Switch position: Screw terminal

Electrical data

Continuous current 1-8. Switch position: 6 A
Rated operating voltage Ue 1-8. Switch position: 250 V AC
Switching rate 1-8. Switch position: 300/min

Environmental conditions

Ambient temperature -5...85 °C
IP rating IP67

Functional safety

B10d (EN ISO 13849-1) BSE 30.0: 30 mil. Switching operations
BSE 61: 30 mil. Switching operations

General data

Approval/Conformity CE
CSA
WEEE
Basic standard IEC 60947-5-1
DIN switch DIN 43697
Operating principle 1-8. Switch position: Mechanical
Version Safety EN 60204-1

Material

Housing material Aluminum
Housing material, surface protection Anodized
Material contacts 1-2. Switch position: Silver
3-8. Switch position: Silver, gold plated
Plunger material 1-8. Switch position: Stainless steel (1.4034)

Mechanical Cam Switches
BNS 813-D08-R12-100-10-02-FD
Order Code: BNS016Z

BALLUFF

Mechanical data

Approach direction	longitudinal, parallel to attachment surface
Approach speed	1-8. Switch position: 60 m/min
Distance cam - reference edge	1-8. Switch position: 4.50...5.00 mm
Flange, feed-through	2 threaded exit M25
Installation	Vertical
Life expectancy mechanical	1-8. Switch position: 30 million Switching operations

Number of switching positions	8x Roller
Plunger style	1-8th switch position: Roller
Switch actuation force	1-2. Switch position: 15 N 3-8. Switch position: 20 N
Switching element	1-2. Switch position: BSE 61 3-8. Switch position: BSE 30.0

Range/Distance

Reproducibility	1-8. Switch position: ± 0.002 mm
-----------------	--------------------------------------

Wiring Diagrams

