LD30EPBR30BPxxIO - IO-Link



Photoelectric Laser sensor with BGS, FGS and IO-Link





Description

The LD30EPBR30BPxxIO are a part of the latest generation of high performance Photoelectric Laser sensors designed to solve challenging detection tasks due to Laser-, Background Suppression-, Foreground Suppression- and Dual Detection features. The small light spot makes detection very precise.

The LD30EPBR30BPxxIO stainless steel sensors are built with high-quality materials and designed for harsh environments.


They are designed for use in environments where high-pressure cleaning (IP69K), cleaning agents and disinfectants are used on a daily basis, thanks to their ECOLAB approval.

The strong stainless steel (AISI316L) together with high-quality plastic materials like PMMA and PES sealings of FKM ensure a safe and excellent mechanical resistance.

The compact sensor design is ideally suited to confined spaces.

Benefits

- · Red laser class 1 assure reliable detection
- Red Laser BGS or FGS Long Range sensor with IO-Link with a adjustable distance of 20 to 325 mm, either by Teach-button or via IO-Link.
- Dual Detection mode Combine Foreground detection with Diffuse Reflective detection.
- Application functions: Dual Detection, Pattern Recognition, Speed & Length, Divider function and Object & Gap Monitoring.
- Neighbour Immunity, selectable up to 3 neighbour sensors
- Easy customization to specific OEM requests by use of the build in IO-Link functionalities.
- The output can be operated either as a standard switching output or in IO-Link mode.
- Fully configurable via output IO-Link v 1.1. Electrical outputs can be configured as PNP / NPN / Push-Pull / External input, normally open or normally closed.
- Timer functions can be set, such as ON-delay, Offdelay, and one shots.
- Logging functions: Temperatures, detecting counter, power cycles and operating hours.
- Detection modes Background suppression (BGS), single point, two point, windows and foreground suppression (FGS) mode.
- · Logic functions: AND, OR, XOR and Gated SR-FF.
- Analogue output: In IO-Link mode the sensor will generate 16 bit analogue process data output representing various selectable process data such as received signal level.





Applications

Detecting of transparent or translucent plastic bottles.

The detection distance is almost independent of the colour of the object to detect.

Dual Detection: A dual detection sensor works as a foreground suppression sensor combined with a diffuse reflective sensor. This sensing principle evaluates both the position change as well as the light intensity of the received light. This allow detection of eg. transparant PET bottles.



Pattern Recognition: An easy way to verify that a product is manufactured to the specification e.g. Furniture production where tabs or holes has to be with a defined pattern.

Speed and Length: Monitor the speed and length of an object on a conveyour for e.g. sorting on size.

Divider function: A de-central counting function that gives a signal when a preset count level is reached e.g. when a certain items are packed in a carton box it ask for a new box.

Object and Gap Monitoring: Function that can sort out good objects and gaps between them so e.g. a packaging machine only reveive objects with the correct size and gaps.



Main functions

- The detection distance is almost independent of the colour of the object to detect.
- The sensor can be operated in IO-Link mode once connected to an IO-Link master or in standard I/O mode.
- · Measured sensing distance as process data.
- · Neighbour interference protection.
- Sensing distance by teach-button, teach by wire or by IO-link parameter.
- · Quality of Run and Quality of Teach result.
- Temperature data for preventive maintenance.
- · Front-end check for preventive maintenance.
- Dual Detection

References

Product selection key



LD30EPBT30BP

Enter the code option instead of \Box

Code	Option	Description
L	-	Sensing principle: Photoelectric laser sensor
D	-	Rectangular housing
30	-	Length of housing
E	-	Stainless steel
Р	-	Teach-button
В	-	Background / Foreground suppression
R	-	Red light
30	-	Sensing distance: 300 mm
В	-	Selectable functions: NPN, PNP, Push-Pull, External Input (only pin 2) or External teach input (only pin 2)
Р	-	Selectable: N.O. or N.C.
	A2	Cable, 2 m
	M5	Connector M8 4-pin
Ю	-	IO-Link version

31/08/2023 LD30EPBR30BPxxIO ENG





Type selection

Connec- tion	Housing	Light type	Code
Cable	Stainless steel	Red laser class 1	LD30EPBR30BPA2IO
Plug	Stainless steel	Red laser class 1	LD30EPBR30BPM5IO



Structure








Fig. 1 Cable


Fig. 2 Plug

Fig. 3 "M8-plug" Pin numbers

Α	Teach-button	G	M8, 4-pin male connector
В	Yellow LED	1	Brown, +V
С	Green LED	2	White, IN/OUT
D	M3 Fixing holes for sensor mounting	3	Blue, -V
E	Sensing window	4	Black, OUT/IO-Link
F	2 m, 4 wire PVC Ø 3.3 mm cable		



Sensing

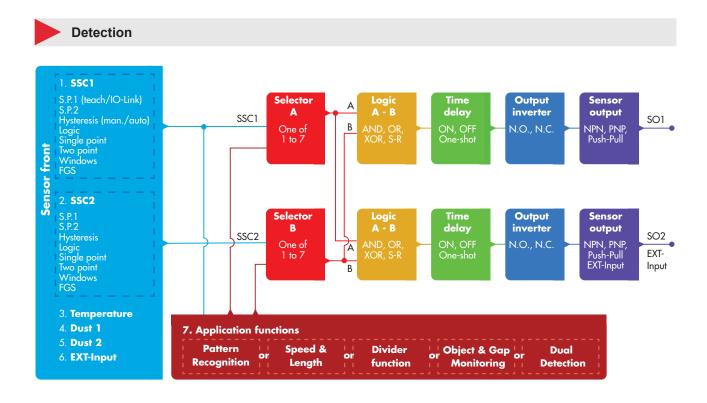



		<u> </u>	
Set Point 1 (SP1)	• 20 325		
- COLT CITE 1 (OL 1)	Factory settings: 300 (Approx. 300 mm @ Reference target 90% reflection)		
Set Point 2 (SP2)	• 20 325		
	Factory settings: 20 (Approx. 20 mn	n @ Reterence target 90% reflection)	
	• High active		
Switching logic	• Low active		
	Factory settings: High active SSC1	2000	
	• Deactivated	SSC2 • Deactivated	
	Single point mode	Single point mode	
Switching mode	• Two point mode	Two point mode	
	Windows mode	Windows mode	
	• FGS mode	FGS mode	
	Factory settings: FGS mode	Factory settings: Deactivated	
Rated operating distance (S _n)	≤ 300 mm	Reference target, white paper with 90 % reflectivity, Size 200x200 mm	
Na. 1	≤ 300 mm	White object 90% reflection	
Maximum detection distance Precise mode	≤ 300 mm	Grey object 18% reflection	
Precise mode	≤ 300 mm	Black object 6% reflection	
	20350 mm		
	Factory settings: 350 mm		
Cutoff distance	Measured distance beyond Cutoff distance, will be truncated to Cutoff		
	distance.		
	Cutoff distance value will also be used when an object cannot be detected.		
Sensitivity control (selectable be-	• IO-Link Adjustment (SSC1)		
tween)	• Teach-button (SSC1)		
Sensitivity adjustment	Factory settings: Teach-button 20 mm 325 mm Teach-button		
Sensitivity adjustment	≤ 15 mm	White object 90% reflection	
Blind zone	≤ 17.5 mm	Grey object 18% reflection	
Billia Zolic	≤ 20 mm	Black object 6% reflection	
Light source / Light type	650 nm / Red laser modulated, class	, ,	
Light coarco / Light typo			
	> 50 000 h		
Typical lifetime Laser	> 50 000 h	e. @ 150 mm	
Typical lifetime Laser Detection angle	± 0.2° Fast mode, ± 0.4° Precise mode	e @ 150 mm	
Typical lifetime Laser Detection angle Light spot size	± 0.2° Fast mode, ± 0.4° Precise mode Ø 1.0 mm @ 300 mm (1/e²)	e @ 150 mm	
Typical lifetime Laser Detection angle	± 0.2° Fast mode, ± 0.4° Precise mode Ø 1.0 mm @ 300 mm (1/e²) ± 0.01°	e @ 150 mm	
Typical lifetime Laser Detection angle Light spot size	± 0.2° Fast mode, ± 0.4° Precise mode Ø 1.0 mm @ 300 mm (1/e²) ± 0.01° 20 325 mm		
Typical lifetime Laser Detection angle Light spot size	± 0.2° Fast mode, ± 0.4° Precise mode Ø 1.0 mm @ 300 mm (1/e²) ± 0.01°		
Typical lifetime Laser Detection angle Light spot size	± 0.2° Fast mode, ± 0.4° Precise mode Ø 1.0 mm @ 300 mm (1/e²) ± 0.01° 20 325 mm Factory settings: SP1 300 and SP2		
Typical lifetime Laser Detection angle Light spot size	± 0.2° Fast mode, ± 0.4° Precise mode Ø 1.0 mm @ 300 mm (1/e²) ± 0.01° 20 325 mm Factory settings: SP1 300 and SP2 20 20 325 mm Factory settings: SP1 300 and SP2		
Typical lifetime Laser Detection angle Light spot size Emitter beam angle	± 0.2° Fast mode, ± 0.4° Precise mode Ø 1.0 mm @ 300 mm (1/e²) ± 0.01° 20 325 mm Factory settings: SP1 300 and SP2 20 20 325 mm Factory settings: SP1 300 and SP2 20	White object 90% reflection	
Typical lifetime Laser Detection angle Light spot size Emitter beam angle	± 0.2° Fast mode, ± 0.4° Precise mode Ø 1.0 mm @ 300 mm (1/e²) ± 0.01° 20 325 mm Factory settings: SP1 300 and SP2 20 20 325 mm Factory settings: SP1 300 and SP2 20 20 325 mm	White object 90% reflection Grey object 18% reflection	
Typical lifetime Laser Detection angle Light spot size Emitter beam angle	± 0.2° Fast mode, ± 0.4° Precise mode Ø 1.0 mm @ 300 mm (1/e²) ± 0.01° 20 325 mm Factory settings: SP1 300 and SP2 20 20 325 mm Factory settings: SP1 300 and SP2 20 20 325 mm Factory settings: SP1 300 and SP2 20 Factory settings: SP1 300 and SP2 20 20 325 mm Factory settings: SP1 300 and SP2	White object 90% reflection	
Typical lifetime Laser Detection angle Light spot size Emitter beam angle	± 0.2° Fast mode, ± 0.4° Precise mode Ø 1.0 mm @ 300 mm (1/e²) ± 0.01° 20 325 mm Factory settings: SP1 300 and SP2 20 20 325 mm Factory settings: SP1 300 and SP2 20 20 325 mm Factory settings: SP1 300 and SP2 20 20 325 mm Factory settings: SP1 300 and SP2 20	White object 90% reflection Grey object 18% reflection	
Typical lifetime Laser Detection angle Light spot size Emitter beam angle	± 0.2° Fast mode, ± 0.4° Precise mode Ø 1.0 mm @ 300 mm (1/e²) ± 0.01° 20 325 mm Factory settings: SP1 300 and SP2 20 20 325 mm Factory settings: SP1 300 and SP2 20 20 325 mm Factory settings: SP1 300 and SP2 20 Adjustable by IO-Link	White object 90% reflection Grey object 18% reflection	
Typical lifetime Laser Detection angle Light spot size Emitter beam angle Adjustable distance	± 0.2° Fast mode, ± 0.4° Precise mode Ø 1.0 mm @ 300 mm (1/e²) ± 0.01° 20 325 mm Factory settings: SP1 300 and SP2 20 20 325 mm Factory settings: SP1 300 and SP2 20 20 325 mm Factory settings: SP1 300 and SP2 20 Adjustable by IO-Link • Manual 1.0 mm 325.0 mm	White object 90% reflection Grey object 18% reflection	
Typical lifetime Laser Detection angle Light spot size Emitter beam angle	± 0.2° Fast mode, ± 0.4° Precise mode Ø 1.0 mm @ 300 mm (1/e²) ± 0.01° 20 325 mm Factory settings: SP1 300 and SP2 20 20 325 mm Factory settings: SP1 300 and SP2 20 20 325 mm Factory settings: SP1 300 and SP2 20 Adjustable by IO-Link • Manual 1.0 mm 325.0 mm • Robust automatic	White object 90% reflection Grey object 18% reflection	
Typical lifetime Laser Detection angle Light spot size Emitter beam angle Adjustable distance	± 0.2° Fast mode, ± 0.4° Precise mode Ø 1.0 mm @ 300 mm (1/e²) ± 0.01° 20 325 mm Factory settings: SP1 300 and SP2 20 20 325 mm Factory settings: SP1 300 and SP2 20 20 325 mm Factory settings: SP1 300 and SP2 20 Adjustable by IO-Link • Manual 1.0 mm 325.0 mm • Robust automatic • Fine automatic	White object 90% reflection Grey object 18% reflection	
Typical lifetime Laser Detection angle Light spot size Emitter beam angle Adjustable distance	± 0.2° Fast mode, ± 0.4° Precise mode Ø 1.0 mm @ 300 mm (1/e²) ± 0.01° 20 325 mm Factory settings: SP1 300 and SP2 20 20 325 mm Factory settings: SP1 300 and SP2 20 20 325 mm Factory settings: SP1 300 and SP2 20 Adjustable by IO-Link • Manual 1.0 mm 325.0 mm • Robust automatic • Fine automatic Factory settings: Fine automatic	White object 90% reflection Grey object 18% reflection Black object 6% reflection	
Typical lifetime Laser Detection angle Light spot size Emitter beam angle Adjustable distance Hysteresis (H)	± 0.2° Fast mode, ± 0.4° Precise mode Ø 1.0 mm @ 300 mm (1/e²) ± 0.01° 20 325 mm Factory settings: SP1 300 and SP2 20 20 325 mm Factory settings: SP1 300 and SP2 20 20 325 mm Factory settings: SP1 300 and SP2 20 Adjustable by IO-Link • Manual 1.0 mm 325.0 mm • Robust automatic • Fine automatic	White object 90% reflection Grey object 18% reflection Black object 6% reflection	
Typical lifetime Laser Detection angle Light spot size Emitter beam angle Adjustable distance	± 0.2° Fast mode, ± 0.4° Precise mode Ø 1.0 mm @ 300 mm (1/e²) ± 0.01° 20 325 mm Factory settings: SP1 300 and SP2 20 20 325 mm Factory settings: SP1 300 and SP2 20 20 325 mm Factory settings: SP1 300 and SP2 20 20 325 mm Factory settings: SP1 300 and SP2 20 Adjustable by IO-Link • Manual 1.0 mm 325.0 mm • Robust automatic • Fine automatic Factory settings: Fine automatic This function can increase the immuni	White object 90% reflection Grey object 18% reflection Black object 6% reflection ty towards unstable targets and an be set from 1 to 255.	

31/08/2023 LD30EPBR30BPxxIO ENG



		<u> </u>
Mutual Inteference Protection	MIP Off One channel 2 channels - CH A 2 channels - CH B	Factory settings: MIP Off
	• 3 channels - CH A • 3 channels - CH B • 3 channels - CH C	

Application functions

Selectable dedicated applications	 No application Dual Detection Pattern Recognition Speed and Length Divider function Object and Gap Monitoring 	Factory settings: No application
-----------------------------------	--	----------------------------------

Dual Detection


A standard Foreground Suppression sensor expects to see a background within a certain specified tolerance. An object is detected if the received light's position exceeds those tolerances set for the background.

A standard Diffuse Reflective (energized) sensor detects the intensity of the received light and if it exceeds a set threshold an object is detected.

A Dual Detection sensor works as a Foreground Suppression sensor combined with a Diffuse Reflective sensor. This sensing principle evaluates both the position change as well as the light intensity of the received light.

Dual Detection	Teach distance Teach excess gain Set Point Hysteresis
	Auto level

Pattern Recognition

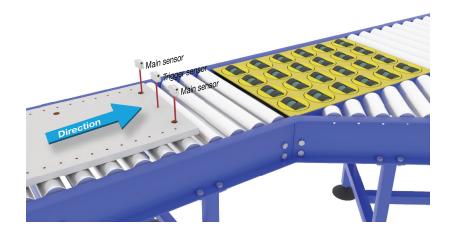


31/08/2023 LD30EPBR30BPxxIO ENG




Function description	The Pattern recognition function detects a pattern (e.g. a row of holes or pins) and compare the order with a pre-teached reference pattern.	
Conditions	Two sensors (Main sensor and Trigger sensor) are needed for this function.	
Settings	 The Trigger sensor has to detect the full length of the body that contains the pattern. The Main sensor has to be aimed at the e.g. holes or pins that constitute the pattern. 	

Speed and Length

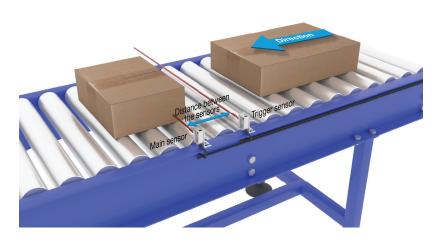

Function description	This function is designed to monitor the length of an object as well as the speed of a conveyour belt. The actual value of the length in [mm] and the speed in [mm/s] are directly available on the IO-Link master.	
Conditions	Two sensors (Main sensor and Trigger sensor) are needed for this function.	
Settings	Distance between sensors.	25 150 mm Factory settings: 100 mm


Divider function

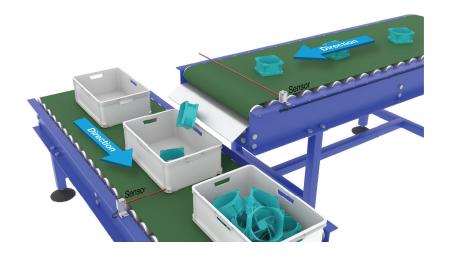



Function description	This function can be used to e.g. monitor how many items that are packed into a carton box. Once the preset number is reached the sensor gives an output so the full box can be replaced.	
Conditions	Only one sensor is needed for this function.	
	A counter value must be set in the sensor.	
Settings	Counter limit.	160 000
	Counter limit.	Factory settings: 5

Object and Gap Monitoring

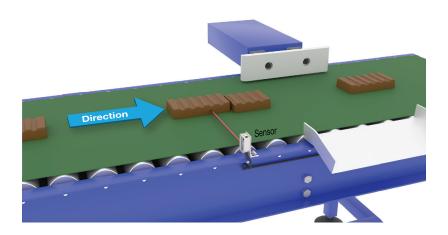


Function description	This function is designed to monitor, that the length of an object and the gap between the following object on a conveyer belt, are within certain limits.	
Conditions	Only one sensor is needed for this function.	
	An acceptable minimum and maximum time [ms] must be set for both the object size a gap size between two objects represented by the time it takes to pass the sensor.	
	Object minimum time.	1060 000 ms Factory settings: 500 ms
Settings	Object maximum time.	1060 000 ms Factory settings: 10 000 ms
	Gap minimum time.	1060 000 ms Factory settings: 500 ms
	Gap maximum time.	1060 000 ms Factory settings: 10 000 ms
Outputs	Output 1 is active when an object is outside the set limits. Output 2 is active when the gap between two objects is outside the set limits.	




Alarm settings

	SSC1	SSC2
Safe limits	• 0 100 % of actual SP	• 0 100 % of actual SP
	Factory settings: 1%	Factory settings: 1%
Dust alarm	Safe limits are used for dust alarm level.	
	High threshold -50 +150 °C	
	• Low threshold -50 +150 °C	
Temperature alarm	Factory settings:	
	High value 60 °C	
	Low value -20 °C	

Detection diagram

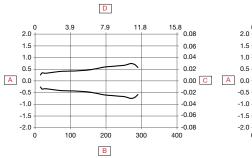






Fig. 4 Fast mode

Fig. 5 Precise mode

Α	Detection width (mm)	D	Sensing range (inches)
В	Sensing range (mm)	E	Sensor
С	Detection width (inches)	F	Object 25 x 25 mm, White 90%

Accuracy

Temperature drift	≤ 0.1%/°C @ 300 mm



Sensing conditions

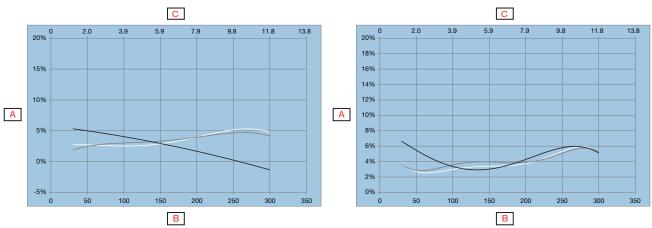


Fig. 6 Fast mode

Fig. 7 Precise mode

A Distance from background (%)		(Black on white 6%/90%)		
B White background 90% (mm)			(Grey on white 18%/90%)	
C White background 90% (inches]			(White on white 90%/90%)	



Features



Power Supply

Rated operational voltage (U _B)	10 30 VDC (ripple included)
Ripple (U _{rop})	≤ 10%
No load aumphy augreent (L)	≤ 30 mA @ U _B min.
No load supply current (I _o)	≤ 15 mA @ U _B max.
Power-ON delay (t _v)	≤ 150 ms



Input selector

	Channel A	Channel B
	Deactivated	Deactivated
	• SSC1	• SSC1
	• SSC2	• SSC2
Innut coloctor	Dust alarm 1	Dust alarm 1
Input selector	Dust alarm 2	Dust alarm 2
	Temperature alarm	Temperature alarm
	External input	External input
	Application functions	Application functions
	Factory settings: SSC1	Factory settings: SSC1



Logic functions

	Channel A + B for SO1	Channel A + B for SO2
	Direct	Direct
	• AND	• AND
Logic functions	• OR	• OR
	• X-OR	• X-OR
	• SR-FF	• SR-FF
	Factory settings: Direct	Factory settings: Direct



Time delays

	For SO1	For SO2
	Disabled	Disabled
	ON delay	ON delay
Timer mode	OFF delay	OFF delay
Timer mode	ON delay and OFF delay	ON delay and OFF delay
	One-shot leading edge	One-shot leading edge
	One-shot trailing edge	One-shot trailing edge
	Factory settings: Disabled	Factory settings: Disabled
	For SO1	For SO2
	• [ms]	• [ms]
Timer scale	• [s]	• [s]
	• [min]	• [min]
	Factory settings: ms	Factory settings: ms
	For SO1	For SO2
Timer value	• 0 32 767	• 0 32 767
	Factory settings: 0	Factory settings: 0

Outputs

	For SO1 Pin 4 Black wire	For SO2 Pin 2 White wire	
	Disabled output	Disabled output	
	• NPN	• NPN	
	• PNP	• PNP	
Sensor output	Push-Pull	Push-Pull	
		External input, active high	
		External input, active low	
		External teach (Teach-in)	
	Factory settings: PNP	Factory settings: PNP	
	For SO1 Pin 4 Black wire	For SO2 Pin 2 White wire	
Output Inverter	• N.O.	• N.O.	
Output inverter	• N.C.	• N.C.	
	Factory settings: N.O.	Factory settings: N.C.	
Poted energtional current (L)	≤ 100mA (continuous) pr. output		
Rated operational current (I _e)	100 mA @ 100 nF Load (Short-time) pr. output		
OFF-state current (I,)	≤ 50 µA		
Minimum operational current (I _m)	> 0,5 mA		
Voltage drop (U _d)	≤ 1.0 VDC @ 100 mA		
Protection	Short circuit, reverse polarity, transients		
	DC-12	Control of resistive loads and solid-	
Utilization category	DC-12	state loads with optical isolation	
	DC-13	Control of electromagnets	
Capacitive load	100 nF @ 100 mA, 24 VDC		





Operation diagram

For default factory sensor

Tv = Power-ON delay

Power supply	ON	
Target (Object)	Present	
Break output (N.C.)	ON	_Tv
Make output (N.O.)	ON	Tv



Response times

Fast mode

	Nominal de	Nominal detection speed		ion speed
Operating frequency (f)	≤ 500 Hz	≤ 500 Hz		
Boonanaa timaa	≤ 1.0 ms	OFF-ON (t _{on})	≤ 0.8 ms	OFF-ON (t _{on})
Response times	≤ 1.0 ms	ON-OFF (t _{OFF})	≤ 0.8 ms	ON-OFF (t _{OFF})

Precise mode

	Nominal detection speed		Max. detection speed	
Operating frequency (f)	≤ 150 Hz		≤ 175 Hz	
Pagnanga timag	≤ 3.3 ms	OFF-ON (t _{on})	≤ 2.9 ms	OFF-ON (t _{on})
Response times	≤ 3.3 ms	ON-OFF (t _{OFF})	≤ 2.9 ms	ON-OFF (t _{OFF})

31/08/2023 LD30EPBR30BPxxIO ENG



Indication

Green LED Yellow LED		Power	Function			
SIO and IO-Link mode						
ONON		ON	ON (stable)* SSC1			
ON	ON OFF ON		OFF (stable)* SSC1			
OFF	ON	ON	ON (Not stable) SSC1			
OFF	OFF	OFF	OFF (Not stable) SSC1			
Flashing 1 Hz 10% dutycycle	-	ON	Connected via IO-Link			
-	Flashing 10 Hz 50% dutycycle	ON	Output short-circuit			
-	Flashing 0.520 Hz 50% dutycycle	ON	Timer triggered indication			
		IO-Link mode only				
● Flashing 1 HZ ON 900 ms OFF 100 ms	-	-	Sensor is in IO-Link mode and SSC1 is stable			
Flashing 1 HZON 100 msOFF 900 ms		-	Sensor is in IO-Link mode and SSC1 is not stable			
Flashing 2 Hz 50% dutycycle		ON	Find my sensor			

^{*}See operation diagram

► LED indication

LED indication selection	LED indication inactive LED indication active Find my sensor Factory settings: LED indication active
--------------------------	---



Environmental

Ambient temperature	-25° +50°C (-13° +122°F)	Operating 1)	
Ambient temperature	-40° +70°C (-40° +158°F)	Storage 1)	
Ambient humidity renge	35% 95%	Operating 2)	
Ambient humidity range	35% 95%	Storage 2)	
Ambient light	≤ 5 000 lux	@ 3000 3200 °K	
Vibration	10150 Hz, 1.0 mm/15 g	EN 60068-2-6	
Shock	30 g _n / 11 ms, 3 pos, 3 neg per axis	EN60068-2-27	
Drop test	2 x 1 m and 100 x 0.5 m	EN 60068-2-31	
Rated insulation voltage (U _i)	50 VDC		
Dielectric insulation voltage	≥ 500 VAC rms	50/60 Hz for 1 min.	
Rated impulse withstand voltage	>1 kV (with 500 Ω)	1.2/50 µs	
Pollution degree	3	IEC60664, 60664A; EN60947-1	
Overvoltage category	III	IEC60664; EN60947-1	
Degree of protection	IP67, IP68 @ 2 m and 20 h	IEC60539; EN60947-1	
	IP69K	DIN 40050-9	
NEMA Enclosure Types	1, 2, 4, 4x, 5, 6, 6P	NEMA 250	

 $^{^{\}scriptscriptstyle 1)}$ Do not bend the cable in temperatures below -10°C

EMC

Electrostatic discharge immunity test	± 8 kV @ air discharge or ± 4 kV @ contact discharge	IEC 61000-4-2; EN60947-1	
Electromagnetic field immunity	10 V/m	IEC 61000-4-3; EN60947-1	
Fast transient immunity	±2 kV / 5 kHz	IEC 61000-4-4; EN60947-1	
Wire-conducted noise	10 Vrms	IEC 61000-4-6; EN60947-1	
Power frequency magnetic field immunity test	Continuous: >30 A/m, 28 μ tesla Short-time: >300 A/m, 280 μ tesla	IEC 61000-4-8; EN60947-1	

²⁾ With no icing or condensation



Diagnostic parameters

Function	Unit	Range	
Sensor Diagnostics		rungo	
Frontend Failure	0	0 or 1	
Memory Failure	0	0 or 1	
Temperature Diagnostics			
Current temperature	[°C]	-50 +150	
Maximum temperature - All time high	[°C]	-50 +150	
Minimum temperature - All time low	[°C]	-50 +150	
Maximum temperature - Since last			
power-up	[°C]	-50 +150	
Minimum temperature - Since last	[°C]	-50 +150	
power-up			
Minutes above Maximum Temperature	[min]	0 2 147 483 647	
Minutes below Minimum Temperature	[min]	0 2 147 483 647	
Operating Diagnostic			
Operating Hours	[h]	0 2 147 483 647	
Number of Power Cycles	[cycles]	0 2 147 483 647	
Detection counter SSC1	[cycles]	0 2 147 483 647	
Maintenaince event counter	[cycles]	0 2 147 483 647	
Download counter	[counts]	065 536	
Quality of Teach	-	0 255%	
Quality of Run	-	0 255%	
Excess gain		0.00 1 000.00	
Dual Detection			
- Distance match %	[%]	0 100	
- Excess gain match %	[%]	0 100	
- Match %	[%]	0 100	
- Background detected	0 = No background detected 1 = Background detected Factory settings: 0		
Error Count	[counts] 065 536		
Device Status	0 = Device is operating properly 1 = Maintenance required 2 = Out-of-specification 3 = Functional-Check 4 = Failure Factory settings: 0		

Events Configuration

Events	Factory default setting
Maintenaince Event	Inactive
Temperature fault event	Inactive
Temperature over-run	Inactive
Temperature under-run	Inactive
Short circuit	Inactive



Observation menu

Process Data	Factory default setting
	Analogue value Inactive
	Analogue value normal <i>Factory settings</i>
Analogue value	Analogue value as Object Length
Allalogue value	Analogue value as Object Speed
	Analogue value as Counter value
	Analogue value as Dual Detection
Excess gain	Active
SO1, Switching output 1	Active
SO2, Switching output 2	Active
SSC1, Sensor switching channel 1	Inactive
SSC2, Sensor switching channel 2	Inactive
DA1, Dust alarm SSC1	Inactive
DA2, Dust alarm SSC2	Inactive
TA, Temperature alarm	Inactive
SC, Short circuit	Inactive
AFO1, Application functions output 1	Inactive

Process data structure

4 Bytes, Analogue value 16 ... 31 (16 bit)

Purto 0	31	30	29	28	27	26	25	24
Byte 0	MSB	-	-	-	-	-	-	-
Buto 4	23	22	21	20	19	18	17	16
Byte 1	-	-	-	-	-	-	-	LSB
D 4: 0	15	14	13	12	11	10	9	8
Byte 2	-	-	SC	TA	DA2	DA1	SSC2	SSC1
Byte 3	7	6	5	4	3	2	1	0
	AFO1	-	-	-	-	-	SO2	SO1




Mechanics/electronics

Connection

Cable	2 m, 4-wire 4 x 0.14 mm², Ø = 3.3 mm, PVC, Black
Plug	M8, 4-pin, male

Wiring




BN	BK	WH	BU	Α	В
Brown	Black	White	Blue	OUT/IO-Link	IN/OUT

Housing

Body	Stainless steel, AISI316L		
Front glass	PMMA coated, Red		
Teach-button	FKM	Fluoroelastomer	
Indication	PES, Transparent	Polyethersulfone	
Sealing	FKM Fluoroelastomer		
Cable gland	FKM	Fluoroelastomer	
Dimensions	11 x 31.5 x 21 mm		
Weight	≤ 100 g	Cable version	
weight	≤ 65 g	Plug version	



Dimensions

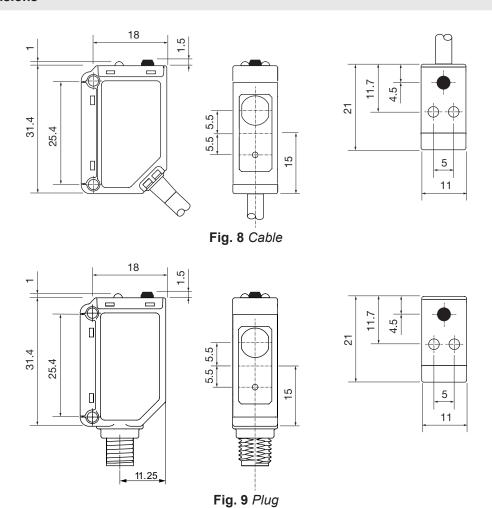



Compatibility and conformity

Approvals and markings

General reference	Sensor designed according to EN60947-5-2		
MTTF _d	133.5 years	EN ISO 13849-1, SN 29500	
CE-marking	CE		
Approvals	CULSUS (UL508) CONTROL (UL508) FDA accession number: 2220061-000		
	EC@LAB°	Topax 56, Topaz AC1, Topaz MD3, Topaz CL1, Topactiv OKTO, P3-hypochloran	
Other Approvals	LASER 1	Class 1 laser according to IEC 60825-1:2014 Complies with IEC / EN 60825-1:2014 and 21 CFR 1040.10 1040.11 except for deviations pursuant to Laser Notice No. 56, dated January 19, 2018	

IO-Link

IO-Link revision	1.1
Transmission rate	COM2 (38.4 kbaud)
SDCI-Norm	IEC 61131-9
Profile	Smart sensor profile 2nd edition, common profile
Min. cycle time	5 ms
SIO mode	Yes
Min. master port class	A (4-pin)
Process data length	32 bit



Delivery contents and accessories



Delivery contents

· Photoelectric switch: LD30EPBR30BPxxIO

· Laser safety note

Mounting bracket: APD30-MB1

Packaging: Carton box



Accessories

- Mounting bracket: APD30-MB2 to be purchased separately
- Connector type: CO..54NF..W series to be purchased separately



Further information

Information	Where to find it	QR
IO-Link manual	http://cga.pub/?605166	
Mounting brackets	http://cga.pub/?6fa29a	
Connectors	http://cga.pub/?3abadc	



COPYRIGHT ©2023

Content subject to change. Download the PDF: www.gavazziautomation.com