


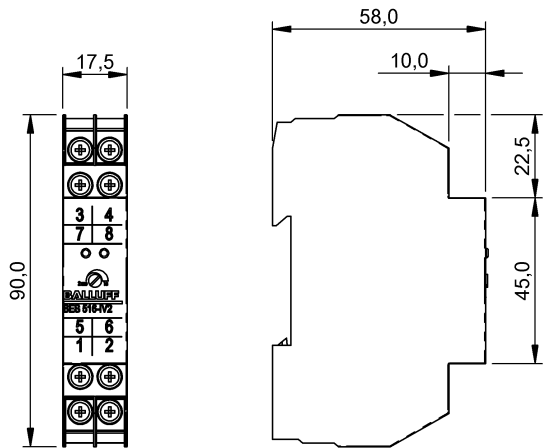

Electrical connection

Connection ports	4-pole
------------------	--------

Electrical data

Current consumption without load	20 mA
Operating voltage U_b	10...30 VDC
Residual ripple max.	3.6 Vpp

Environmental conditions

Ambient temperature	0...60 °C
IP rating	IP20, IP40

General data

Approval/Conformity	CE WEEE
Function	Pulse lengthening

Material

Housing material	Plastic
------------------	---------

Mechanical data

Dimension	58 x 90 x 17.5 mm
-----------	-------------------

Output/Interface

Digital inputs	PNP/NPN
Duration of time function	2...1000 ms
Switching output	PNP/NPN

Remarks

for control cabinet installation