

Split System Submittal Data

System: **E18RB4UW** Indoor: **CS-E18RB4UW** Outdoor: **CU-E18RB4U**

Job Name: _____
 Location: _____
 Engineer: _____
 Submitted to: _____
 Submitted by: _____
 Reference: _____

Approval: _____
 Date: _____
 Construction: _____
 Unit#: _____
 Drawing#: _____

General Data	
Power (V/P/Hz)	230/208/1/60
Circuit Ampacity (A)	20
Fuse Size, Max.(A)	25
Compressor	DC Twin Rotary (Inverter)
No. Used	1
Motor Type (No. of poles)	DC Brushless (4 poles)
Outdoor Unit	
Fan Type	Propeller
No. Speeds	Variable speed
Type Drive	Direct / DC Brushless Motor
No. Poles (RPM)	8-700
No. Motors (W)	1-60
CFM (Hi speed)	1925
Coil Type	Aluminum Fin and Copper Pipe
Fin Type - Pipe Type	Coated Corrugated fin - Inner Rifled
Rows x stage x F.P.I.	2 x 36 x 19
Size (W x H x L)	1-13/32 x 29-25/32 x 34-7/32
Tube Size (in.)	9/32
Indoor Unit	
Fan Type	Cross Flow
Motor Type, No. of Poles	DC Brushless, 8 poles
No. Speeds	Variable speed
RPM (Cool / Heat), High	750/820
No. Motors (W)	1-94.8
CFM (Qlo/Lo/Me/Hi/SHi) Cooling	250/270/355/450/480
CFM (Qlo/Lo/Me/Hi/SHi) Heating	290/310/400/495/520
Operating Sound-Hi/Me/Lo/ dB-A (Cool)	44/31/28
Coil Type	Aluminum Plate Fin & Copper Tube
Fin Type - Pipe Type	Coated Slit Plate - Inner Rifled
Row x stage x FPI	2 x 10 x 18
Tube Size (in.)	9/32"
Drain Connection Size (in.)	3/4"
Refrigerant	R410A
Oz - R410a (outdoor unit)	56.5
Refrigerant Control	Electronic Expansion Valve
Refrigerant Tubing Connections	Flare
Line Length, Max (ft.)	100
Elevation Difference, Max (ft.)	49.2
Line Size (in. O.D. Discharge)	1/4"
Line Size (in. O.D. Suction)	1/2"



Pre-charge, tubing length at shipment	32.8'
Dimensions (HxWxD)	
Indoor Unit (Uncrated) (in.)	10-1/4 x 22-21/32 x 22-21/32
Outdoor Unit (Uncrated) (in.)	31-5/16 x 34-15/32 x 12-5/8
Panel (Uncrated)	2-1/32 x 27-9/16 x 27-9/16
Weight (lbs.)	
(Indoor) Net	40lb
(Outdoor) Net	132lb
(Panel) Net	6lb


Performance Data @ ARI Standard Conditions	
Cooling	
Total Capacity (BTU/H)	17500
Sensible Capacity (BTU/H)	16120
Latent Capacity (BTU/H)	1380
SEER	17.5
Dehumidification (Pints/H)	6.1
Amps (A)	7.7
Power Inputs (W)	1700
Outdoor Sound Rating (dB-A)	65
Heating	
Total Capacity (BTU/H)	20400
HSPF	8.5
Amps (A)	10.7
Power Inputs (W)	2340
Outdoor Sounds Rating (dB-A)	66

Features	
Controls	Microprocessor
Remote Controller	LCD Wireless Type included as standard
Wired Remote Controller	CZ-RD52CU
Temperature Control	IC Thermistor
Timer	Single Event Daily ON/OFF TIMER
Quiet mode	Included
High Power mode	Included
Air Louver, Horizontal	Automatic, Sweep, Step
Air Louver, Vertical	Automatic, Sweep, Step
Power Failure Automatic Restart	Built-In
Heating/Cooling Automatic Changeover	Built-In
Self-Diagnosis	Built-In
Air Filter	Washable, One-touch


Operating Range	Indoor Air Intake Temp	Outdoor Air Intake Temp
Cooling (Max)	89.6F DB/73.4F WB	114.8F DB
Cooling (Min)	60.8F DB/51.8F WB	0F DB
Heating (Max)	86.0F DB	75.2F DB
Heating (Min)	60.8DB	5F DB



Indoor Dimensions

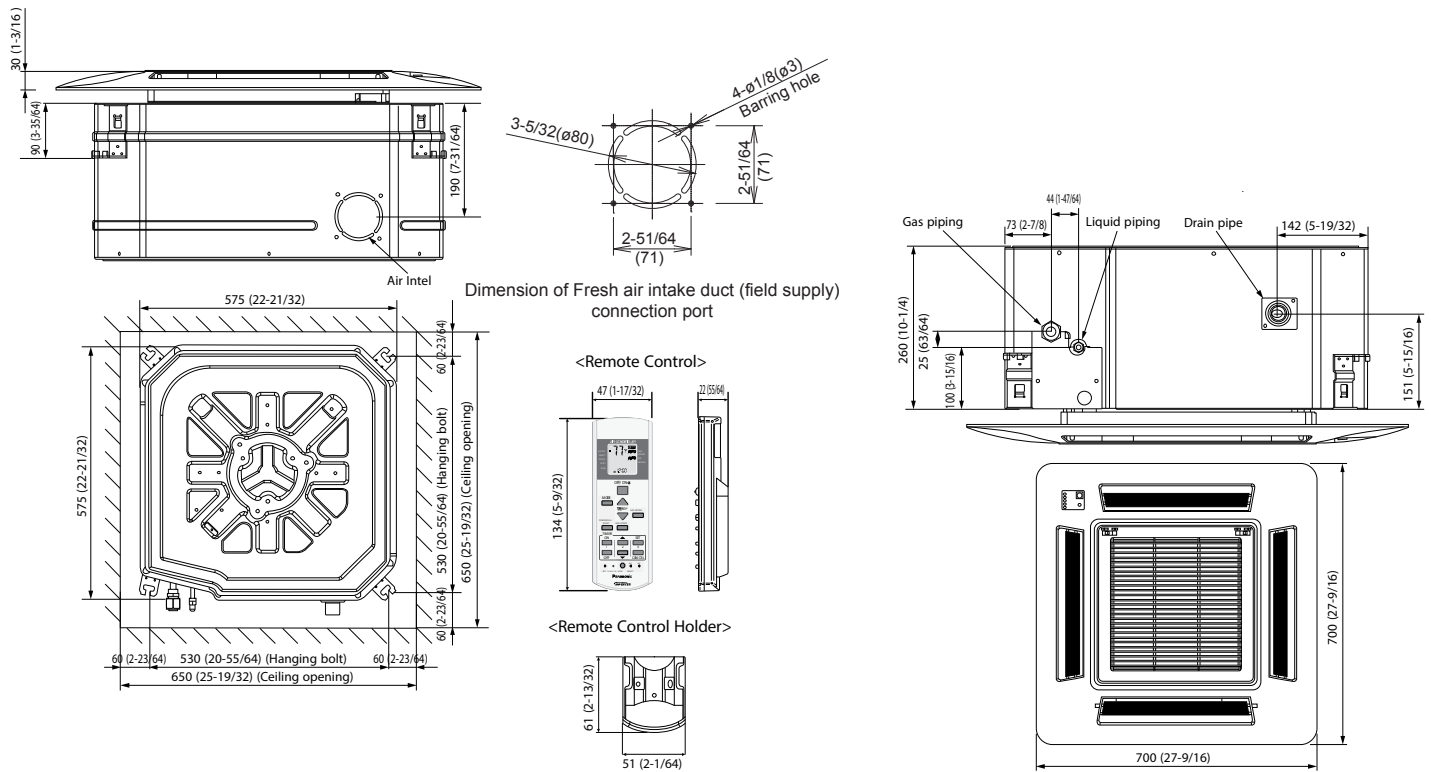

Outdoor Dimensions

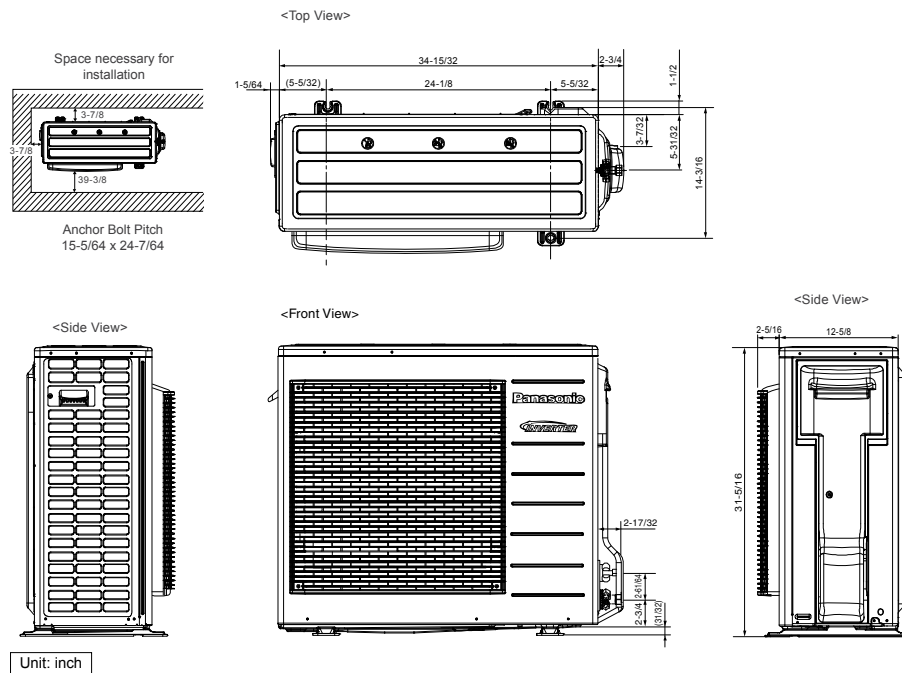

Panasonic

Panasonic North America
Air Conditioning Division
1690 Roberts Blvd., NW, Suite 110
Kennesaw, GA 30144
us.panasonic.com/aircon