

# Miller Disposable Concrete Anchor Straps

Models: 8185C and 8185CX

## Description

The 8185C Disposable Concrete Anchor Strap is uniquely designed to provide temporary anchorage on concrete forms.

Model 8185CX is available with web loops on both ends. The loop serving as the anchorage connection point for carabiner attachment has an integral wear pad for durability.

## Materials

**Webbing:** 1 3/4 - in (44 mm) Abrasion Resistant Polyester  
**Thread:** 6 cord bonded 3 strand polyester thread.  
**D-Ring:** Drop forged Alloy Steel; Zinc plated, 2 1/4 - in. (57 mm) opening  
**Label:** Valeron

*\*All hardware meets ASTM (50) fifty-hour salt spray test requirements.*

## Technical

### Max Working

**Load Capacity:** 310 lbs (141 kg)

**Webbing:** 5,000 lbs (22 kN) min. tensile strength

**D-Rings:** 5,000 lbs (22 kN) min. tensile strength

**Thread:** 42 lbs (19 kg) min. tensile strength

### 8185C

- **Length:** 2-ft and 4-ft (standard)  
(additional lengths - 5, 6, 8, 10 and 20 ft)
- **Weight:** .52 lbs (0.24 kg)


### 8185CX

- **Length:** 2-ft (610 mm)
- **Weight:** .25 lbs (0.11 kg)

## Certification

OSHA 1926.502, 1910.66, ANSI A10.32, Z359-2007\*

\*ANSI Z359-2007 compliant for connectors which meet the 3,600 lb gate requirements.

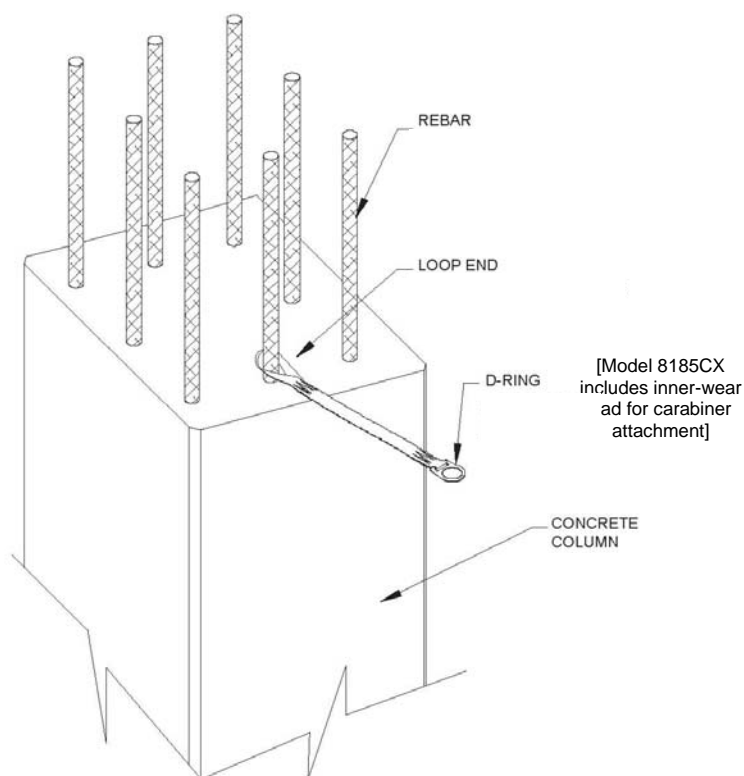

# MILLER®

by Honeywell

Toll Free 800.873.5242 (press 4) • [hsptechsupport@honeywell.com](mailto:hsptechsupport@honeywell.com) • [www.millerfallprotection.com](http://www.millerfallprotection.com)

**⚠ WARNING!** THIS DOCUMENT PROVIDES AN OVERVIEW OF FALL PROTECTION PRODUCTS AVAILABLE FROM HONEYWELL AND CARE HAS BEEN TAKEN TO ASSURE THE ACCURACY OF THE DATA. IT DOES NOT PROVIDE IMPORTANT PRODUCT WARNINGS AND INSTRUCTIONS. HONEYWELL RECOMMENDS ALL USERS OF FALL PROTECTION EQUIPMENT UNDERGO THOROUGH TRAINING, AND THAT ALL WARNINGS AND INSTRUCTIONS PROVIDED WITH THE PRODUCTS BE THOROUGHLY READ AND UNDERSTOOD PRIOR TO EACH USE. FAILURE TO READ AND FOLLOW ALL PRODUCT WARNINGS AND INSTRUCTIONS COULD RESULT IN SERIOUS INJURY OR DEATH.