


YEL,PVC,9X16,ITC

Instrumentation Tray Cable – Reelfast™ Bulk Cable



Features

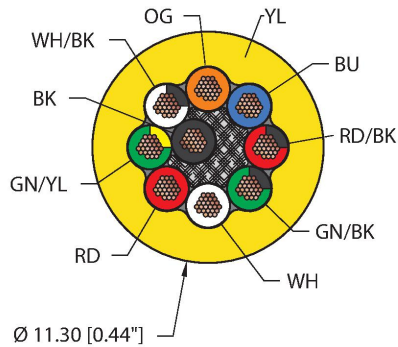

- Instrumentation Tray Cable
- Yellow PVC jacket, 9X16 AWG
- Sunlight Resistant
- -40 Cold Bend Rating
- Oil Resistant
- Flame Ratings: UL 1685 FT4, UL1061, CSA FT4
- ITC 150V
- PLTC 300V
- UL/CSA AWM 600V
- CMX OUTDOOR 300V
- CMG 300V

Technical data

Type	YEL,PVC,9X16,ITC
ID	RF51033
Cable data	
Cable Platform	Instrumentation Tray Cable
Total number of conductors	9
Cable diameter	Ø 11.3 mm
Cable jacket	PVC, Yellow
Conductor diameter	0.088 "
Conductor material	TC (tinned copper)
Conductor insulation material	PVC
Conductor size	9 x 16 AWG [Similar to 1.50 mm²]
Number of strands x O.D.	19 x 0.0117 "
Conductor colors	OG, BU, RD/BK, GN/BK, WH, RD, GN/YE, WH/BK, BK
Weight	0.559 lbs. /meter
Electrical properties at +20 °C	
Voltage	ITC 150V PLTC 300V UL/CSA AWM 600V CMX OUTDOOR 300V CMG 300V
Dielectric withstand (min.)	2 KVAC
DC resistance (max)	4.4 Ω/1000ft max
Mechanical and chemical properties	
Bending radius (static)	≥ 5 x Ø

1	OG	1
2	BU	2
3	RD/BK	3
4	GN/BK	4
5	WH	5
6	RD	6
7	GN/YE	7
8	WH/BK	8
9	BK	9

Technical data

Bending radius (dynamic)	≥ 10 x Ø
UL cold bend rating	-40 °C
Ambient temperature range (static)	-40 °C...+105 °C
Ambient temperature range (dynamic)	5 °C...+105 °C
Temperature range (installation)	-10 °C...+105 °C
Approval	
UL Approvals	UL 2250 ITC UL 13 PLTC Sunlight Resistant -40C Cold Bend Oil Res I Oil Res II UL 758 AWM 2586
CSA Approvals	CSA AWM I/II A/B CMX OUTDOOR-CMG CSA FT4
Compliances	RoHS CE
Note	
- Flex ratings may be reduced if used in extreme temperatures, exposure to certain chemicals, operating above the rated cycle speed, or operating below the rated cable bend radius. - We reserve the right to make technical alterations without prior notice.	