


# NI50U-CK40-IOL6X2-H1141

## Inductive Sensor – IO-Link Communication and Configuration

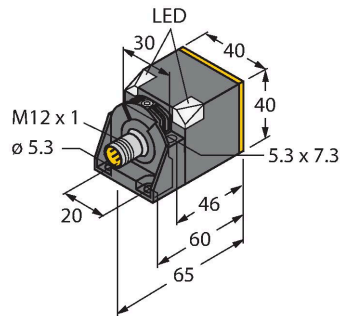


### Features

- Rectangular, height 40 mm
- Variable orientation of active face in 5 directions
- Plastic, PBT-GF30-V0
- High luminance corner LEDs
- Optimum view on supply voltage and switching state from any position
- Factor 1 for all metals
- Increased switching distance
- Protection class IP68
- Resistant to magnetic fields
- Auto-compensation protects against pre-damping
- Partially embeddable
- DC 4-wire, 10...30 VDC
- M12 x 1 connector
- Configuration and communication via IO-Link v1.1 or via standard I/O
- Electrical outputs independently configurable
- Switching distance can be parametrized per output and hysteresis
- Identification via 32-byte memory
- Temperature monitoring with adjustable limits
- Various timer and pulse monitoring functions

### Technical data

Type	NI50U-CK40-IOL6X2-H1141
ID no.	1625871
Rated switching distance	50 mm
Mounting conditions	Non-flush, flush mountable
Secured operating distance	$\leq (0.81 \times S_n)$ mm
Repeat accuracy	$\leq 2$ % of full scale
Temperature drift	$\leq \pm 10$ %
	$\leq \pm 20$ %, $\leq -25$ °C v $\geq +70$ °C
Hysteresis	3...15 %
Ambient temperature	-25...+70 °C
Operating voltage	10...30 VDC
Residual ripple	$\leq 10$ % $U_{ss}$
DC rated operational current	$\leq 150$ mA
No-load current	$\leq 27$ mA
Residual current	$\leq 0.1$ mA
Isolation test voltage	$\leq 0.5$ kV
Short-circuit protection	yes / Cyclic
Voltage drop at $I_a$	$\leq 1.8$ V
Wire breakage/Reverse polarity protection	yes / Complete
Communication protocol	IO-Link
Output function	4-wire, NO/NC, PNP/NPN
Output 1	Switching output or IO-Link mode
Output 2	switching output
Insulation class	□

### Wiring diagram

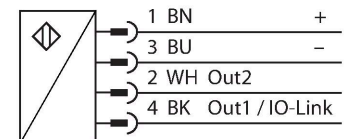

### Functional principle







Inductive sensors are designed for wear-free and contactless detection of metal objects. uprox3 sensors have significant advantages due to their patented multi-coil system. They excel thanks to their optimum switching distances, maximum flexibility and operational reliability as well as efficient standardization. In addition, the uprox3 IO-Link sensors allow certain parameters to be set within predefined limits and various device functions to be configured in accordance with customer needs, using an IO-Link Master. For detailed information, refer to the uprox3 IO-Link manual.

## Technical data

Switching frequency	0.5 kHz
<b>IO-Link</b>	
IO-Link specification	V 1.1
IO-Link port type	Class A
Communication mode	COM 2 (38.4 kBaud)
Process data width	16 bit
Switchpoint information	2 bit
Status bit information	3 bit
Frame type	2.2
Minimum cycle time	8 ms
Function Pin 4	IO-Link
Function Pin 2	DI
Maximum cable length	20 m
Included in the SIDI GSDML	Yes
<b>Design</b>	
Design	Rectangular, CK40
Dimensions	65 x 40 x 40 mm
	variable orientation of active face in 5 directions
Housing material	Plastic, PBT-GF20-V0, Black
Active area material	Plastic, PA12-GF30, yellow
Electrical connection	Connector, M12 × 1
Vibration resistance	55 Hz (1 mm)
Shock resistance	30 g (11 ms)
Protection class	IP68
MTTF	874 years acc. to SN 29500 (Ed. 99) 40 °C
<b>Power-on indication</b>	
Power-on indication	2 × LEDs, Green
Switching state	2 × LEDs, Yellow
Included in delivery	Fixing clamp BS4-CK40

## Mounting instructions

### Mounting instructions/Description

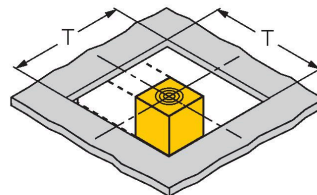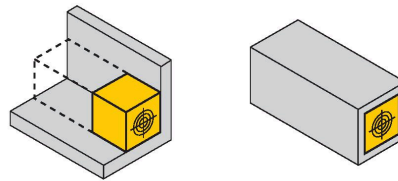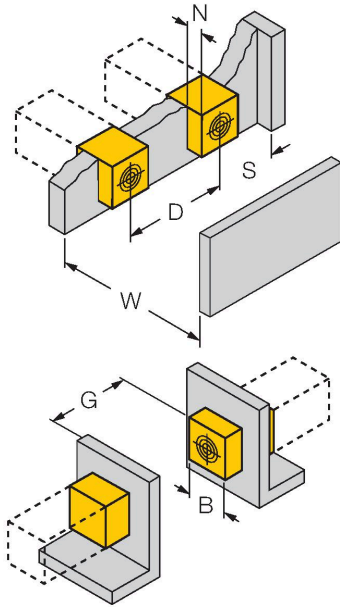

Distance D	240 mm
Distance W	105 mm
Distance S	60 mm
Distance G	300 mm
Distance N	30 mm
Width active area B	40 mm

#### Flush mounting

1-side mounting:  $S_r = 35$  mm;  $D = 240$  mm  
 2-side mounting:  $S_r = 25$  mm;  $D = 240$  mm  
 3-side mounting:  $S_r = 20$  mm;  $D = 80$  mm  
 4-side mounting:  $S_r = 15$  mm;  $D = 60$  mm

Backside as well as recessed mounting with reduced switching distance

#### Recessed mounting in metal:

$x = 10$  mm:  $S_r = 20$  mm  
 $x = 20$  mm:  $S_r = 20$  mm  
 $x = 30$  mm:  $S_r = 20$  mm  
 $x = 40$  mm:  $S_r = 20$  mm

#### Protruded mounting:

$y = 10$  mm:  $S_r = 40$  mm  
 $y = 20$  mm:  $S_r = 50$  mm  
 $y = 30$  mm:  $S_r = 50$  mm  
 $y = 40$  mm:  $S_r = 50$  mm

#### Mounting in aperture plate:

$T = 150$  mm:  
 Sensor with twisted turning angle  
 On metal  $S_r = 50$  mm  
 Metal-enclosed on one side  $S_r = 25$  mm  
 Metal-enclosed on two sides  $S_r = 15$  mm  
 Metal-enclosed on three sides  $S_r = 12$  mm


The values stated relate to a 1 mm thick steel plate.

## Accessories

BSS-CP40

6901318

Mounting clamp for rectangular housings 40 x 40 mm; material: Polypropylene

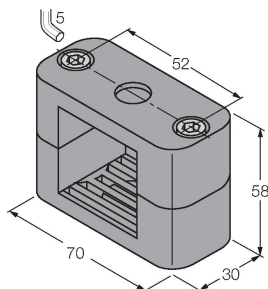

## Wiring accessories

Dimension drawing	Type	ID no.	
	RKC4.4T-2/TEL	6625013	Connection cable, female M12, straight, 4-pin, cable length: 2 m, sheath material: PVC, black; cULus approval; other cable lengths and qualities available, see <a href="http://www.turck.com">www.turck.com</a>