



Technical data

Conductor insulation material	PVC
Conductor size	4 x 16 AWG [Similar to 1.50 mm²]
Conductor colors	BN, WH, BU, BK
Electrical properties at +20 °C	
Rated voltage	63 V
Current	12 A
Mechanical and chemical properties	
Ambient temperature range (static)	-40 °C...+85 °C
Approval	
Note	
- CAUTION: RISK OF ELECTRICAL SHOCK. DO NOT DISCONNECT UNDER LOAD.	
- The standard mating right angled cordset will dress perpendicular to the flats of the mounting hole.	
- We reserve the right to make technical alterations without prior notice.	

Mounting hole - Threaded

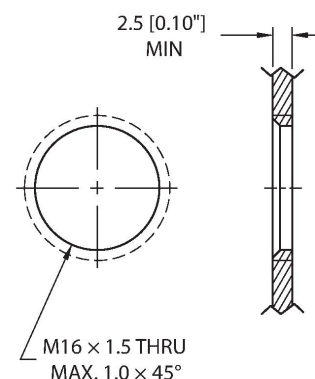

Front panel mounting

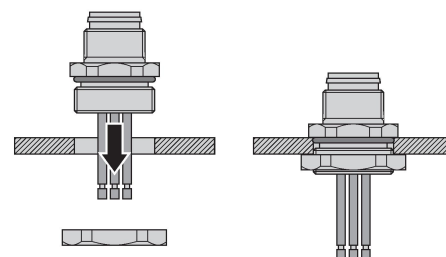


Accessories

LOCKNUT-M16 (10/BAG)


A9579

Locknut, M16, Brass, Nickel-plated, 10 per bag



DECAL,9-CLRS,RECEPT+BOXES,EURO(QTY1)

100008955



1 decal sticker containing 9 different color sets of 11 decals to color code a sensor, junction block port, cable end, or receptacle. 5ct 4x9mm rectangles, 4ct 8x19mm rectangles, 1ct 27mm ID ring, 1ct 20mm ID ring.

ORING-Ø7x1.5-M12-(10/BAG)

100024937

10 pack of Ø7x1.5 FKM O-rings for female M12 connectors

