

Rittal – The System.

Faster – better – everywhere.

Door-Operated Switch – SZ 4315.550

Date : Jan 22, 2017

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE


SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



Door-Operated Switch – SZ 4315.550

created: 22.01.2017 build on www.rittal.com/us-en

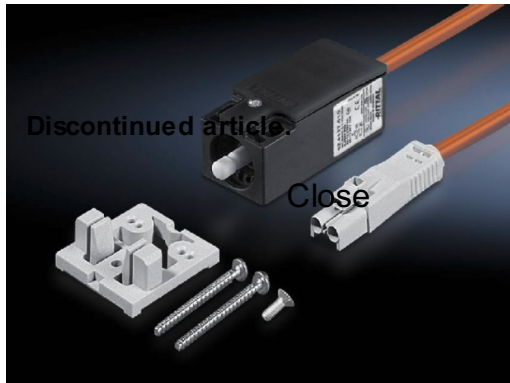

Product features

Version:	With connection cable
Dimensions:	Length: 600 mm (24 ")
Rated operating voltage:	400 V
Installation options:	for standard and courtesy lights without an integrated door-operated switch
Technical specifications:	240 V AC, 6 A
Equipment (electrical):	Cable color: Gray
Rated insulation voltage:	400 V AC
Rated impulse withstand voltage, phase to phase:	6000 V AC
Packaging unit:	1 pc(s).
Weight/packaging unit:	0.12 kg (0.3 lb.)
EAN:	4028177501461
Customs tariff number:	85444290
ETIM 6.0:	EC002626

ETIM 5.0:	EC002626
eCl@ss 8.0/8.1:	27189266
eCl@ss 7.0/7.1:	27119116
eCl@ss 6.0/6.1:	27119116
eCl@ss 5.1/5.1.4:	27189241
Approvals	
Approvals:	CSA UR
Declarations:	Declaration of conformity

2017 © Rittal Corporation