

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [5022443330](#)
Status: **Active**
Overview: FFC-FPC (SMT)
Description: 0.50mm Pitch Easy-On FFC/FPC Connector, For LVDS, 2.33mm Height, Right-Angle, Surface Mount, ZIF, Bottom Contact Style, 33 Circuits

Documents:

[3D Model](#) [Product Specification PS-502244-001-001 \(PDF\)](#)
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

General

Product Family FFC/FPC Connectors
Series [502244](#)
Overview [FFC-FPC \(SMT\)](#)
Product Name Easy-On
UPC 822350698818

Physical

Actuator Type Flip
Circuits (Loaded) 33
Color - Resin Black, Natural
Contact Position Bottom
Durability (mating cycles max) 20
Mated Height 2.33mm
Material - Metal Phosphor Bronze
Material - Plating Mating Gold
Material - Plating Termination Gold
Net Weight 340.810/mg
Number of Rows 1
Orientation Right Angle
PCB Locator No
PCB Mounting Surface Mount
PCB Retention Yes
Packaging Type Embossed Tape on Reel
Pitch - Mating Interface 0.50mm
Polarized to PCB Yes
Stackable No
Temperature Range - Operating -25° to +85°C
Wire/Cable Type FFC only


Electrical

Current - Maximum per Contact 0.4A
Voltage - Maximum 50V AC (RMS)/DC

Material Info

Reference - Drawing Numbers

Product Specification PS-502244-001-001
Sales Drawing SD-502244-001, SD-502244-002

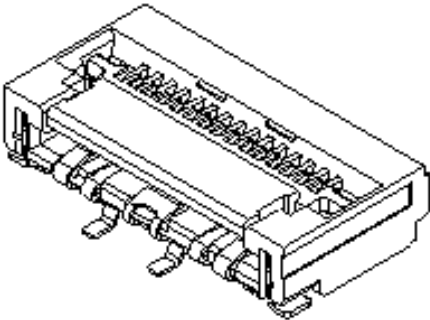

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

China RoHS

REACH SVHC

Not Contained Per
-ED/88/2018 (15
January 2019)

Halogen-Free

Status

Not Low-Halogen

For more information, please visit [Contact US](#)

China ROHS	Green Image
ELV	Not Relevant
RoHS Phthalates	Not Contained

Search Parts in this Series

[502244](#) Series

Use With

LVDS Cable [15021](#)