


## Product data sheet

### Characteristics

## QO130L200PG

Load center, QO, 1 phase, 30 spaces, 30 circuits, 200A convertible main lugs, PoN, NEMA1, gnd bar, UL

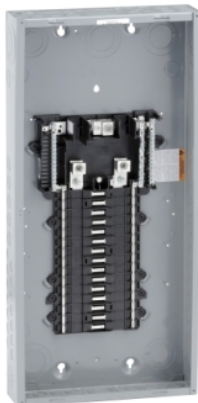

### Main

Marketing Trade Name	QO
Product Type	Load Center
Cover Type	Order separately

### Complementary

Tightening Torque	Main lugs 250 lb.in, AWG 4...250 kcmil, aluminium/copper Main lugs 250 lb.in, AWG 4...300 kcmil, aluminium/copper Cover 20 lb.in
PoN Convertible Mains (lugs)	PoN Convertible Mains (lugs)
Rated Current	200 A
Number of Spaces	30
Max Short Circuit Current Rating	65 kA
Maximum Number of Single Pole Circuits	40
Maximum Number of Tandem Breakers	10
Number of Phases	1 phase
Voltage Rating	120/240 V AC
Wire Size	AWG 6...250 kcmil aluminium/copper
Ground Bar	Grounding bar included (not installed)
Electrical Connection	Lugs
Wiring Configuration	3-wire
Busbar Material	Tin plated copper: busbar
Enclosure Material	Welded sheet steel
Surface Finish	Baked enamel Gray
Box Number	9
Height	29.84 in (758 mm)
Width	14.25 in (362 mm)

### Environment

Enclosure Rating	NEMA 1 indoor
Ambient Air Temperature for Operation	23 °F (-5 °C) 104 °F (40 °C)
Product Certifications	UL Listed

## Ordering and shipping details

Category	10003-QO PON 1PH LC,12-60 CKT, ML N1
Discount Schedule	DE3A
GTIN	785901219248
Returnability	Yes
Country of origin	US

## Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	4.20 in (10.668 cm)
Package 1 Width	14.80 in (37.592 cm)
Package 1 Length	31.00 in (78.74 cm)
Package 1 Weight	17.00 lb(US) (7.711 kg)
Unit Type of Package 2	PAL
Number of Units in Package 2	27
Package 2 Height	42.20 in (107.188 cm)
Package 2 Width	40.00 in (101.6 cm)
Package 2 Length	48.00 in (121.92 cm)
Package 2 Weight	485.00 lb(US) (219.992 kg)

## Offer Sustainability

Sustainable offer status	Green Premium product
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>
REACH Regulation	<a href="#">REACH Declaration</a>
REACH free of SVHC	Yes
EU RoHS Directive	Compliant <a href="#">EU RoHS Declaration</a>
Toxic heavy metal free	Yes
Mercury free	Yes
China RoHS Regulation	<a href="#">China RoHS Declaration</a>
RoHS exemption information	<a href="#">Yes</a>
Environmental Disclosure	<a href="#">Product Environmental Profile</a>
Circularity Profile	No need of specific recycling operations

## Contractual warranty

Warranty	18 months
----------	-----------