

OPTIONAL BACK PANEL  
 0.100 [2.54] TH'K- ALUMINUM  
 0.075 [1.91] TH'K- WHITE STEEL  
 & GALVANNEALED  
 0.125 [3.18] TH'K- FIBERGLASS

(2) POLYCARBONATE  
 FLANGES (GLUED)

.10 [2.54]

6.11 [155.27]

BACK VIEW

15.37 [390.40]

14.75 [374.65]  
 MAX  
 SLOT  
 DIST

14.62 [371.35]  
 MIN  
 SLOT  
 DIST

(8) R.162 [4.10]

10.01 [254.18]

FRONT VIEW  
 WITH COVER REMOVED  
 AND BACK PANEL DISPLAYED

(4) EACH #10-32 BRASS  
 INSERTS, AND STAINLESS  
 STEEL FLANGE AND  
 FEET SCREWS

STAINLESS STEEL  
 HINGE PIN

CLOSED CELL  
 NEOPRENE  
 GASKET

(2) STAINLESS STEEL  
 LOCKABLE SNAP LATCHES

.13 [3.30]

SECTION B-B

(4) EACH #10-32 BRASS  
 INSERTS AND PLATED  
 CARBON STEEL SCREWS

MATERIAL:

BOX-COMPRESSION MOLDED FIBERGLASS REINFORCED POLYESTER  
 COVER- COMPRESSION MOLDED FIBERGLASS REINFORCED POLYESTER  
 CLEAR COVER AND WINDOWS- POLYCARBONATE

12.75 [323.85]


10.88 [276.23]

14.05 [356.87]

12.25 [311.15]

10.25 [260.35]

12.27 [311.66]

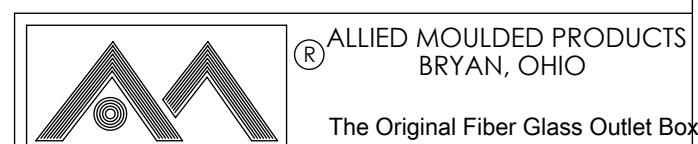

Description  
**AMU Ultraline**  
 Part No.  
**AMU1426LF**

CONFIDENTIAL  
 THIS MATERIAL IS OWNED BY THE ALLIED  
 MOULDED PRODUCTS COMPANY, IS DISCLOSED  
 IN CONFIDENCE, AND IS NOT TO BE REPRODUCED  
 OR DISTRIBUTED WITHOUT PRIOR WRITTEN  
 PERMISSION FROM ALLIED MOULDED PRODUCTS.