




1) Sensing surface, 2) See data for antenna form

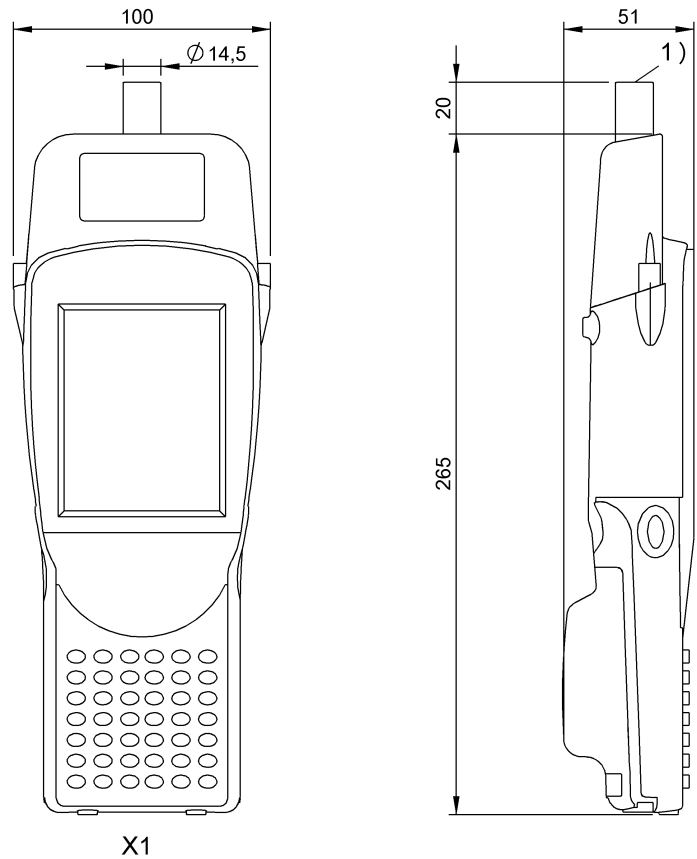

Display/Operation

Keypad 52 keys, alphanumeric

Electrical data

Charging current 900 mA
Charging time 5 h
EN 300330-1 Power Class 5
Nominal voltage 3.7 VDC
Operating voltage U_b 3.7 V DC rechargeable battery pack

Environmental conditions

Ambient temperature -10...50 °C
Continuous shock load yes
EN 60068-2-27, Shock yes
EN 60068-2-32 Free fall yes
EN 60068-2-6, Vibration yes
IP rating IP65
Storage temperature -40...60 °C

General data

Antenna type round
Approval/Conformity CE
WEEE

Mechanical data

Application weight 585.00 g
Dimension 100 x 51 x 265 mm

HF (13.56 MHz)
BIS M-873-1-002-D-000-1012
Order Code: BAE00K8

BALLUFF

Remarks

Includes Bluetooth

Only for BIS M data carrier with round coil $\varnothing \leq 20\text{mm}$.

Included accessory: For connecting to: X1 = AC/charger Stylus

Application weight inclusive battery pack.

Values are under rated conditions unless otherwise specified.

Order accessories separately: Replacement AC/charger BAE PS-XA-1W-05-030-702-CX-01 Replacement stylus 5-pack BAM MD-XA-999-0001 Grip BAM MD-XA-002-0001 Docking Station BAM MD-XA-001-0001