


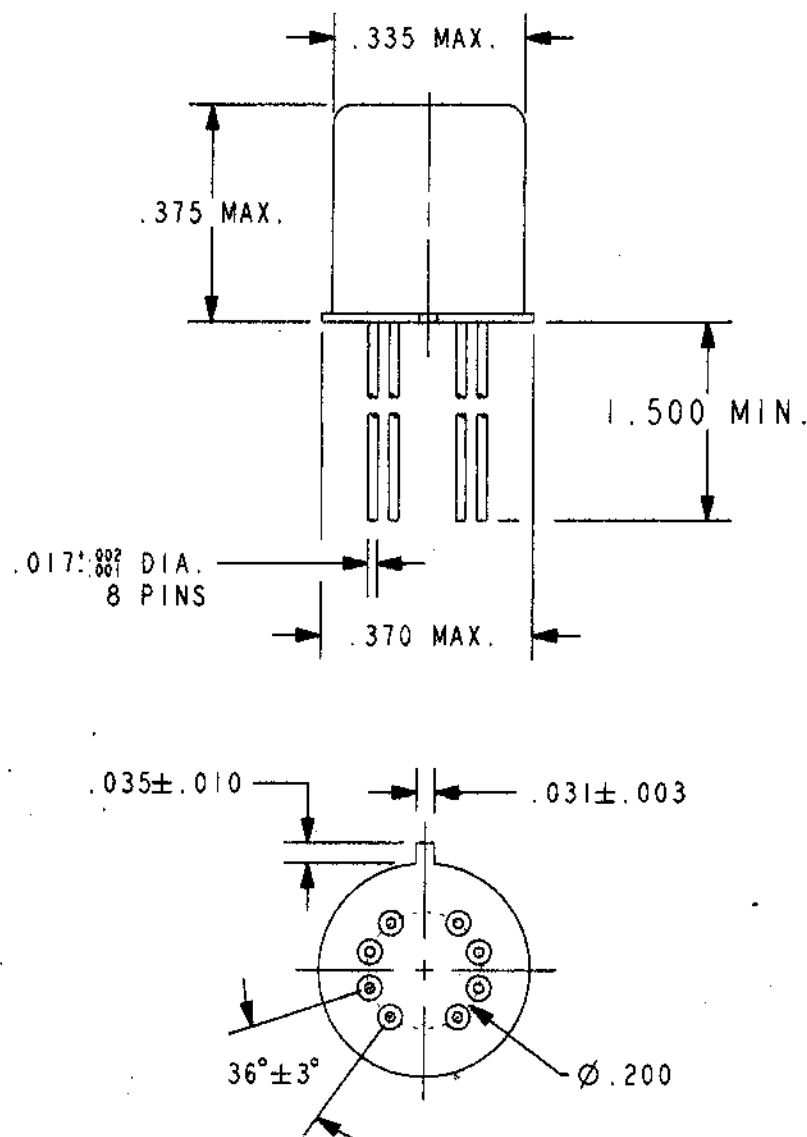

REV. 0

DCO 143288

COIL: @ 25°C	
RESISTANCE	100 OHMS $\pm 10\%$
NOMINAL VOLTAGE	5.0 VDC
MUST OPERATE	2.6 VDC
MUST RELEASE	1.4 VDC MAX., 0.23 VDC MIN.

ENVIRONMENT:


VIBRATION 10 CPS TO 3000 CPS @ 30 g's
 SHOCK 75 g's 6 MS. DURATION
 TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE TIME 4.0 MS MAX.

RELEASE TIME 7.5 MS MAX.

CONTACT STABILIZATION 2.0 MS MAX.

CUSTOMER DATA SHEET



TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO 1A
28 VDC RESISTIVE 100,000 OPERATIONS

DR. B.D. 10/31/01

CK. *[Signature]* 10/31/01

CII Technologies
 advanced control electronic solutions

CUST. QPL
 CUST. NO. M39016/16-017M REV.

"JMSD" RELAY

JMSWD-5XM