

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0760111605](#)
Status: **Active**
Overview: GbX I-Trac Backplane Connector System
Description: GbX I-Trac Right-Angle Header Module, 1.85mm by 3.70mm Pitch, Unguided, Open Ends, 7 Rows, 6 Columns, 84 Circuits, Staggered Mating Pin Length 3.80mm & 4.70mm

Documents:

[3D Model](#) [Packaging Specification PK-70873-588 \(PDF\)](#)
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification

UL E29179


General

Product Family Backplane Connectors
 Series [76011](#)
 Application Coplanar, Daughtercard
 Component Type Right Angle Male
 Overview [GbX I-Trac Backplane Connector System](#)
 Product Name GbX I-Trac
 UPC 800756679556

Physical

Circuits (Loaded) 84
 Circuits (maximum) 84
 Color - Resin Black
 Durability (mating cycles max) 200
 First Mate / Last Break Yes
 Flammability 94V-0
 Guide to Mating Part No
 Keying to Mating Part None
 Material - Metal High Performance Alloy (HPA)
 Material - Plating Mating Gold
 Material - Plating Termination Tin
 Material - Resin High Temperature Thermoplastic
 Net Weight 17.166/g
 Number of Columns 6
 Number of Pairs 4, Open Pin Field
 Number of Rows 7
 Orientation Right Angle
 PC Tail Length 2.00mm
 PCB Locator No
 PCB Retention None
 PCB Thickness - Recommended 1.60mm
 Packaging Type Tray
 Pitch - Mating Interface 3.70mm
 Pitch - Termination Interface 1.20mm, 2.50mm
 Plating min - Mating 0.762µm
 Plating min - Termination 0.762µm
 Polarized to PCB No
 Stackable No
 Surface Mount Compatible (SMC) Yes
 Temperature Range - Operating 85°C
 Termination Interface: Style Through Hole - Compliant Pin

Electrical

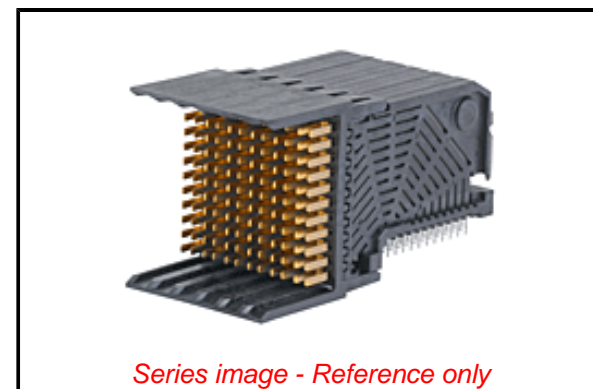

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per
 -ED/88/2018 (15
 January 2019)

Halogen-Free

Status

Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

China RoHS

Green Image

Not Relevant

Not Contained

Search Parts in this Series

[76011](#) Series

Mates With

[76020](#) GbX I-Trac Right Angle Receptacle Module

Use With

[78230](#) GbX I-Trac Right Angle Power Receptacle

Current - Maximum per Contact	1.0A
Data Rate	12.0 Gbps
Shielded	No
Voltage - Maximum	120V AC (RMS)/DC

Solder Process Data

Lead-freeProcess Capability	N/A
-----------------------------	-----

Material Info

Reference - Drawing Numbers

Packaging Specification	PK-70873-588
Sales Drawing	SD-76011-001-001

This document was generated on 05/15/2019

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION