

WIREMOLD®Evolution™ Series Floor Boxes

Evolution[™] Series – Maintaining the Floor's Fire Rating

Evolution™ Series Fire Classified Floor Boxes are the latest advancement in the most complete and innovative line of floor solutions in the industry.

In addition to the products many unique features, the Evolution Fire Classified Floor Boxes meet and exceed UL's classification requirement. Evolution Series Floor Boxes are ideal for areas where large capacity audio/video, power and communication services are needed. Ranging in size from 4- to 10-gangs of capacity, these boxes have completely finished interiors with removable modules that provide easy access for reconfiguring services. Evolution Series Fire Classified Floor Boxes are an ideal option for installations where services are constantly evolving, such as commercial offices, conference rooms, and entertainment venues.



New Evolution Series Fire Classified Floor Boxes provide increased capacity options and a variety of innovations not available in any other floor boxes.

FEATURES & BENEFITS

■ Fire Classified.

Evolution Floor Box has been designed to maintain the fire rating of the floor for up to 3 hours.



■ Audio/Video Design.

Evolution Series Floor Boxes have been developed specifically with the A/V industry in mind. With 3 1/2" - 3 7/8" (89mm x 98mm) of wiring



capacity behind each device plate, these boxes will accept devices from leading A/V manufacturers including Legrand AVIP, Extron Electronics and Crestron.

■ Suitable for use in air handling spaces.

In accordance with Sec 300-22(c) of the National Electric Code.

■ Durable 180° articulating hinge.

Hinge design enables covers to open a full 180° and lie flat on the floor surface with the durability to support a large cover. Provides easy access to all

interior modules and activations while reducing tripping hazards.

Auto-close egress doors.

Cable egress doors lock in position when open, and automatically close around wires to protect cabling and reduce trip hazards.



■ Meets ADA Accessibility Guidelines.

Trim flange is designed to meet the ADA Accessibility Guidelines as it pertains to ADA Standard 4.5, which addresses the change in floor and ground surface levels.

FEATURES & BENEFITS (continued)

■ Finished interior.

Fully finished interior removes the unfinished industrial look while increasing visibility, making it easier to see where to plug in devices.



■ Large capacity.

6- to 10-gangs of capacity to accommodate power, communications, and A/V devices. A minimum of 5" (127mm) of space between devices providing ample space for hand access when plugging and unplugging into the devices.



Bare (polished) concrete and terrazzo applications.

Evolution Series Floor Box has been designed to be installed into bare (polished) concrete and terrazzo floors.



Accepts standard size wall plates.

Evolution Series Floor Boxes accept industry standard one- to five-gang wall plates from industry leading manufacturers.



Die cast aluminum cover assemblies.

Evolution Series Floor Box Covers have been designed to work on multiple floor surfaces and



are manufactured from die cast aluminum to provide strength and style. Decorative powder coated colors (black, brass, bronze, gray, nickel and aluminum) will complement any room décor.

■ Cable Management.

Allows multiple cables to be organized and controlled for easier cable egress.



■ TopGuard™ Protection.

Evolution Series Floor Box covers meet and exceed UL scrub water exclusion requirements for tile, carpet, wood, bare concrete and terrazzo floor coverings.

UL Listed and Fire Classified to U.S. and Canadian safety standards.

UL Classified to maintain the integrity of up to 3-hour fire rated floor structures.

Evolution Series Fire Classified Floor Box Specifications

| Evolution Series Floor Box Compartment Volumes | | | | | | |
|---|-----------------------|----------------|-----------------------|-----------------|--|--|
| MODEL | OUTER COMPA | RTMENTS (Each) | CENTER COMP | ARTMENTS (Each) | | |
| EFB45S Series | 27.5 in. ³ | (450ml) | 34 in. ³ | (557ml) | | |
| EFB6 Series | 32 in.³ | (524ml) | 38.5 in. ³ | (630ml) | | |
| EFB8 Series | 27.5 in. ³ | (450ml) | 34 in. ³ | (557ml) | | |
| EFB10 Series | 23.5 in. ³ | (385ml) | 27.5 in. ³ | (450ml) | | |
| EFBFF Series | 64.5 in. ³ | (1056ml) | 64.5 in. ³ | (1056ml) | | |

PRE-POUR BOX ADJUSTMENT RANGES

| CLASSIFICATION HOUR RATING | CATALOG NUMBER | MINIMUM POUR HEIGHT | | MAXIMUM POUR HEIGHT | |
|-------------------------------|-------------------|------------------------|--------|------------------------|---------|
| 1, 1 1/2, 2 | EFB45S-FC | 2" | (51mm) | 5 1/4" | (133mm) |
| 1, 1 1/2, 2 | EFB6S-FC | 2" | (51mm) | 5 1/4" | (133mm) |
| 1, 1 1/2, 2 | EFB8S-FC | 2" | (51mm) | 5 1/4" | (133mm) |
| 1, 1 1/2, 2 | EFB10S-FC | 2" | (51mm) | 5 1/4" | (133mm) |
| 1, 1 1/2, 2, 3 | EFB45S-FC12 | 2" | (51mm) | 6 1/2" | (165mm) |
| 1, 1 1/2, 2, 3 | EFB45S-FC22 | 2" | (51mm) | 6 1/2" | (165mm) |
| 1, 1 1/2, 2, 3 | EFB6S-FC1122 | 2" | (51mm) | 6 1/2" | (165mm) |
| 1, 1 1/2, 2, 3 | EFB6S-FC2222 | 2" | (51mm) | 6 1/2" | (165mm) |
| 1, 1 1/2, 2, 3 | EFB8S-FC1122 | 2" | (51mm) | 6 1/2" | (165mm) |
| 1, 1 1/2, 2, 3 | EFB8S-FC2222 | 2" | (51mm) | 6 1/2" | (165mm) |
| 1, 1 1/2, 2, 3 | EFB10S-FC1122 | 2" | (51mm) | 6 1/2" | (165mm) |
| 1, 1 1/2, 2, 3 | EFB10S-FC1122 | 2" | (51mm) | 6 1/2" | (165mm) |

Evolution Series Fire Classified Floor Box Specifications

FIRE CLASSIFICATION RANGES & MINIMUM THICKNESS

| REINFORCED CONCRETE SLAB (Plywood Decking) | | | | | |
|--|--|-----------------|---------------|-----------------|--|
| | MINIMUM THICKNESS FOR FIRE RESISTANCE RATING | | | | |
| CEMENT TYPE | 1-Hour | 1 1/2-Hour | 2-Hour | 3-Hour | |
| Normal Weight | 3 1/2" (89mm) | 4 5/16" (109mm) | 5" (127mm) | 6 3/16" (158mm) | |
| Lightweight | 2 1/2" (64mm) | 3 1/8" (79mm) | 3 5/8" (91mm) | 4 7/16" (112mm) | |

| CORRUGATED DECKING | | | | | |
|--------------------|--|------------|----------------|-----------------|--|
| | MINIMUM THICKNESS FOR FIRE RESISTANCE RATING | | | | |
| CEMENT TYPE | 1-Hour | 1 1/2-Hour | 2-Hour | 3-Hour | |
| Normal Weight | 3 1/2" (89mm) | 4" (102mm) | 4 1/2" (114mm) | 5 1/5" (133mm) | |
| Lightweight | 2 5/8" (67mm) | 3" (76mm) | 3 1/4" (83mm) | 4 3/16" (106mm) | |

Outlet Boxes and Fittings Classified for Fire Resistance Legrand (R8209)

Types EFB6S-FC, EFB8S-FC, EFB10S-FC preset electrical inserts for use with Types EFB610CT, EFB610BT, EFB610CTC and EFB610BTC service fitting covers in 2 hr fire rated D900 Series Floor-Ceiling designs constructed with nominal 2 in. or 3 in. deep fluted steel floor units having nominal 5 in. wide valleys and crests spaced 12 in. OC. The preset electrical inserts are for use with a minimum 3 1/4 in. thickness of structural concrete topping. For use with a max of sixty (60) No. 14 AWG Type THHN conductors. The assembled preset electrical insert with floor plate kit and service activation fitting will not reduce the 2 hr fire rating of the floor assembly when installed in accordance with the installation instructions accompanying the preset electrical insert and when the preset electrical inserts are spaced minimum 2 ft OC with not more than one unit per 4 sq ft of floor area in each span.

Type EFB45S-FC preset electrical inserts for use with Types EFB45CT, EFT45BT, EFB45CTC, and EFB45BTC service fitting covers in 2 hr fire rated D900 Series Floor-Ceiling designs constructed with nominal 2 in. or 3 in. deep fluted steel floor units having nominal 5 in. wide valleys and crests spaced 12 in. OC. The preset electrical inserts are for use with a minimum 3 1/4 in. thickness of structural concrete topping. For use with a max of thirty (30) No. 14 AWG Type THHN conductors. The assembled preset electrical insert with floor plate kit and service activation fitting will not reduce the 2 hr fire rating of the floor assembly when installed in accordance with the installation instructions accompanying the preset electrical insert and when the preset electrical inserts are spaced minimum 2 ft OC with not more than one unit per 4 sq ft of floor area in each span.

Types EFB6S-FC-xx, EFB8S-FC-xx, EFB10S-FC-xx, EFB10S-FC222, EFB10S-FC1122, EFB8S-FC2222, EFB8S-FC1122, EFB6S-FC2222, and EFB6S-FC1122 preset electrical inserts for use with Types EFB610CT, EFB610BT, and EFB610CTC service fitting covers in up to 3 hr fire rated D900 Series Floor-Ceiling designs constructed with nominal 2 in. or 3 in. deep fluted steel floor units having nominal 5 in. wide valleys and crests spaced 12 in. OC. The preset electrical inserts are for use with a minimum 3 1/4 in. thickness of structural concrete topping. For use with a max of sixty (60) No. 14 AWG Type THHN conductors. The assembled preset electrical insert with floor plate kit and service activation fitting will not reduce the 3 hr fire rating of the floor assembly when installed in accordance with the installation instructions accompanying the preset electrical insert and when the preset electrical inserts are spaced minimum 2 ft OC with not more than one device per each 4 sq. ft. of floor area.

Types EFB45S-FC-xx, EFB45S-FC12, EFB45S-FC22 preset electrical inserts for use with Types EFB45CT, EFT45BT, EFB45CTC, and EFB45BTC service fitting covers in up to 3 hr fire rated D900 Series Floor-Ceiling designs constructed with nominal 2 in. or 3 in. deep fluted steel floor units having nominal 5 in. wide valleys and crests spaced 12 in. OC. The preset electrical inserts are for use with a minimum 3 1/4 in. thickness of structural concrete topping. For use with a max of thirty (30) No. 14 AWG Type THHN conductors. The assembled preset electrical insert with floor plate kit and service activation fitting will not reduce the 3 hr fire rating of the floor assembly when installed in accordance with the installation instructions accompanying the preset electrical insert and when the preset electrical inserts are spaced minimum 2 ft OC with not more than one device per each 4 sq. ft. of floor area.


NOTE: "XX" in part name denotes conduit feed sizes.

| | | | oor Box Model S | | | Oandrik Frank | Fire | Notes |
|---|-----------------|-------------------------------|--|---|---|-----------------------------|-------------------------------|--|
| FLOOR BOX MODEL | Box Capacity | Depth Behind Device Plates | Device Plate Size | Cover Colors | Finished Floor Surface | Conduit Feed Sizes | Fire Rating | Notes |
| EFB45S-FC12 EFB45S-FC22 | 4 & 5-Gangs | 3 1/2" (89mm) | Uses Standard Size Device Plates: Single-Gang – (2 3/4" x 4 1/2") Double-Gang – (4 9/16" x 4 1/2") Triple-Gang – (6 3/8" x 4 1/2") Four-Gang – (8 1/8" x 4 1/2") | Powder-Coat Black, Gray, Brass, Bronze, Nickel & Aluminum | Carpet, Tile, Wood, Polished Concrete & Terrazzo | 1 1/4" 1 1/4" & 2" 2" | 2-Hours 3-Hours 3-Hours | Use EFB45-CTR to allow cover to be flush with finished floor surface (sold separately) |
| EFB6S-FC11222 EFB6S-FC22 | 6-Gangs | 3 7/8" (98mm) | Uses Standard Size Device Plates: Single-Gang - (2 3/4" x 4 1/2") | Powder-Coat Black, Gray, Brass, Bronze & Nickel | Carpet, Tile, Wood, Polished Concrete & Terrazzo | 1 1/4" 1 1/4" & 2" 2" | 2-Hours 3-Hours 3-Hours | Use EFB610-CTR to allow cover to be flush with finished floor surface (sold separately) |
| EFB8S-FC EFB8S-FC1122 EFB8S-FC2222 | 8-Gangs | 3 1/2" (89mm) | Uses Standard Size Device Plates: Single-Gang – (2 3/4" x 4 1/2") Double-Gang – (4 9/16" x 4 1/2") Triple-Gang – (6 3/8" x 4 1/2") Four-Gang – (8 1/8" x 4 1/2") | Powder-Coat Black, Gray, Brass, Bronze & Nickel | Carpet, Tile, Wood, Polished Concrete & Terrazzo | 1 1/4" 1 1/4" & 2" 2" | 2-Hours 3-Hours 3-Hours | Use EFB610-CTR to allow cover to be flush with finished floor surface (sold separately) |
| EFB10S-FC EFB10S-FC1122 EFB10S-FC2222 | 10-Gangs | 3 1/2" (89mm) | Uses Standard Size Device Plates: Single-Gang – (2 3/4" x 4 1/2") Double-Gang – (4 9/16" x 4 1/2") Triple-Gang – (6 3/8" x 4 1/2") Five-Gang – (10" x 4 1/2") | Powder-Coat Black, Gray, Brass, Bronze & Nickel | Carpet, Tile, Wood, Polished Concrete & Terrazzo | 1 1/4" 1 1/4" & 2" 2" | 2-Hours 3-Hours 3-Hours | Use EFB610-CTR to allow cover to be flush with finished floor surface (sold separately) |

Evolution Series Fire Classified 4-& 5-Gang Floor Box Ordering Information

Catalog No./Item

EFB45S-FC



Description/Specifications

4- & 5-Gang Fire Classified Floor Box – Pre-assembled installation ready floor box has been designed to be installed in above grade (second floors and above) concrete floors while maintaining the fire classification of the floor. This box is classified to be used in the 2-hour fire rated floors. Designed to accept standard size wall plates. **Box comes complete with all components needed for initial installation.**

Country of Origin: USA

Components Included:

- Protective/Disposable Cover
- Fire Classified Pan
- One (1) Removable Module
 - Back Box (1 per module)
- Device Mounting Brackets
- Removable Repositionable Divider
- Two (2) 1 1/4" (32mm) Intumescent Conduit Feeds
- Two (2) Cable Management Guides


Items not included with the box and sold separately:

- Receptacles
- Communication Jacks
- A/V Devices
- · Device plates



NOTES: Designed for new construction applications.


Consult structural engineer before making cuts into decking. Add additional supports as instructed by the structural engineer.

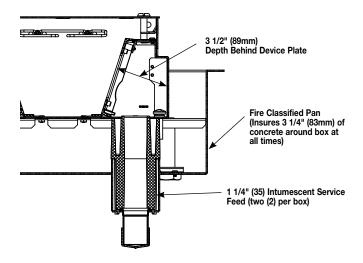

Evolution Series Fire Classified 4-& 5-Gang Floor Box Ordering Information

Catalog No./Item

EFB45S-FC12



Description/Specifications

4- & 5-Gang Fire Classified Floor Box – Pre-assembled installation ready floor box has been designed to be installed in above grade (second floors and above) concrete floors while maintaining the fire classification of the floor. This box is classified to be used in the 3-hour fire rated floors. Designed to accept standard size wall plates. **Box comes complete with all components needed for initial installation.**

Country of Origin: USA

Components Included:

- Protective/Disposable Cover
- Fire Classified Pan
- One (1) Removable Module
 - Back Box
 - Device Mounting Brackets
- Removable Repositionable Divider
- One (1) 1 1/4" (32mm) Intumescent Conduit Feed
- One (1) 2" (51mm) Intumescent Conduit Feed
- Two (2) Cable Management Guides


Items not included with the box and sold separately:

- Receptacles
- · Communication Jacks
- A/V Devices
- · Device plates



NOTES: Designed for new construction applications.

Consult structural engineer before making cuts into decking. Add additional supports as instructed by the structural engineer.

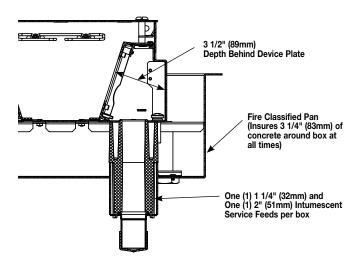

Evolution Series Fire Classified 4-& 5-Gang Floor Box Ordering Information

Catalog No./Item

EFB45S-FC22

15 1/8" 11 3/16" (284mm) (284m

Description/Specifications

4- & 5-Gang Fire Classified Floor Box – Pre-assembled installation ready floor box has been designed to be installed in above grade (second floors and above) concrete floors while maintaining the fire classification of the floor. This box is classified to be used in the 3-hour fire rated floors. Designed to accept standard size wall plates. **Box comes complete with all components needed for initial installation.**

Country of Origin: USA

Components Included:

- Protective/Disposable Cover
- Fire Classified Pan
- One (1) Removable Module
 - Back Box
 - Device Mounting Brackets
 - Removable Repositionable Divider
- Two (2) 2" (51mm) Intumescent Conduit Feeds
- Two (2) Cable Management Guides


Items not included with the box and sold separately:

- Receptacles
- · Communication Jacks
- A/V Devices
- Device plates



NOTES: Designed for new construction applications.

Consult structural engineer before making cuts into decking. Add additional supports as instructed by the structural engineer.

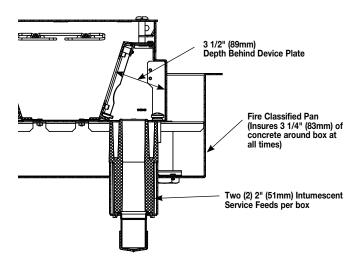


Evolution Series Fire Classified 4- & 5-Gang Floor Box Accessories Ordering Information

Catalog No./Item


Description/Specifications

EFB8-MB



Mounting Bracket – Holds up to four (4) devices for power, communications or audio/video. Bracket accepts standard size (2 3/4" x 4 1/2" (70mm x 114mm)) device plates sold separately by others.

EFB8S-22GMB




Mounting Bracket – Equipped with two (2) 2-gang standard size device openings for a standard 2-gang (4 9/16" x 4 1/2" (116mm x 114mm)). Ideal for 2-gang A/V devices such as Crestron® 2-gang digital media devices. Device plates and devices supplied by others.

EFB8S-4GMB




Mounting Bracket – Holds a standard 4 gang device plate. Device plate dimensions: 8 1/8" x 4 1/4" (206mm x 116mm).

EFB-AAP




Device Plate – Holds two (2) Extron Electronics AAP devices. Device plate dimensions: 2 3/4" x 4 1/2" (69mm x 114mm).

EFB-MAAP



Device Plate – Holds four (4) Legrand AVIP or Extron Electronics MAAP devices. Device plate dimensions: 2 3/4" x 4 1/2" (69mm x 114mm).


EFB-MOS



Device Plate – European device plate accepts up to 45mm x 67.5mm Arteor device. Device plate dimensions: 2 3/4" x 4 1/2" (69mm x 114mm).

NOTE: Not designed for use with adorne devices.


EFB-B



Blank Device Plate – Device plate dimensions: 2 3/4" x 4 1/2" (69mm x 114mm).

Catalog No./Item


EFB810-DIV



Description/Specifications

Relocatable Divider – Provides separation of services. Includes one divider plate.

EFB45-CMG




Cable Management Guides – Guides help organize and maintain cable position when opening and closing the cover.

EFB10-MB



Mounting Bracket – Holds up to five (5) devices for power, communications or audio/video. Bracket accepts EFB10 Series device plates (2 1/32" x 4 5/8") (58mm x 117mm) device plates sold separately.


EFB10S-23GMB



Mounting Bracket – Equipped with one 2-gang standard size device opening and one 3-gang standard size device opening.

Accepts a standard 2-gang (4 9/16" x 4 1/2" (116mm x 114mm)) and a 3-gang (6 3/8" x 4 1/2" (162mm x 114mm)) device plate. Ideal for 2-gang A/V devices such as Crestron® 2-gang and 3-gang digital media devices. Device plates and devices supplied by others.

EFB10S-5GMB



Mounting Bracket – Holds a standard 5 gang device plate Device plate dimensions: 10" x 4 1/2" (254mm x 116mm).

EFB10-B



Blank Device Plate – Device plate dimensions: 2 5/16" x 4 5/8" (58mm x 118mm).

NOTE: Country of Origin for all Evolution Series Fire Classified 4- & 5-Gang Floor Box Accessories shown on this page is USA.

Evolution Series Fire Classified 4- & 5-Gang Floor Box Accessories Ordering Information Catalog No./Item Catalog No./Item **Description/Specifications Description/Specifications** EFB10-DP **Duplex Device Plate - Device EFB10-2C** Device Plate - Accepts one dual plate dimensions: 2 5/16" x 4 5/8" Wiremold Open System adapter, (58mm x 118mm). Includes or one Ortronics® Series II receptacle spacers. adapter, or one Ortronics® TracJack adapter. Adapters sold separately. Device plate dimensions: 2.3" x 4.652" (58mm x 118mm). **Decorator Style Device Plate -**EFB10-DEC For use with decorator style **EFB10-AAP Device Plate - Holds two (2)** receptacles, GFCI receptacle, and Extron Electronics AAP devices. decorator style audio/video Device plate dimensions: 2.3" x devices. Device plate dimensions: 4.652" (58mm x 118mm). 2.3" x 4.652" (58mm x 118mm). Includes receptacle spacers. Knockout Plate - Single **EFB10-S1** receptacle 1.39" (35mm). diameter. Device plate **EFB10-MAAP Device Plate - Holds four (4)** dimensions: 2.3" x 4.652" Legrand AVIP or Extron (58mm x 118mm). Includes Electronics MAAP devices. Device plate dimensions: 2.3" x receptacle spacers. 4.652" (58mm x 118mm). **EFB10-S2** Knockout Plate - Single receptacle 1.59" (40mm). diameter. Device plate

EFB10-MOS

5507B-WH

5507D-WH

Device Plate – (45mm x 67.5mm)

Blank Faceplate - For covering

Duplex Receptacle Faceplate -

For covering duplex style devices.

unused compartments in the

device bracket.

Also accepts 106

communications frame.

device plate. Device plate

dimensions: 2.3" x 4.652" (58mm x 118mm).

NOTE: Country of Origin for all Evolution Series Fire Classified 4- & 5-Gang Floor Box Accessories shown on this page is USA.

dimensions: 2.3" x 4.652"

receptacle spacers.

Series Open System

(58mm x 118mm).

communication adapters.

EFB10-6AB

EFB10-3S2

(58mm x 118mm), Includes

Device Plate – Accepts up to three (3) dual Wiremold CM2

Adapters sold separately. Device

plate dimensions: 2.3" x 4.652"


Device Plate - Accepts up to

devices. Ortronics® devices sold

three (3) Ortronics® Series II

separately. Device plate

dimensions: 2.3" x 4.652" (58mm x 118mm).

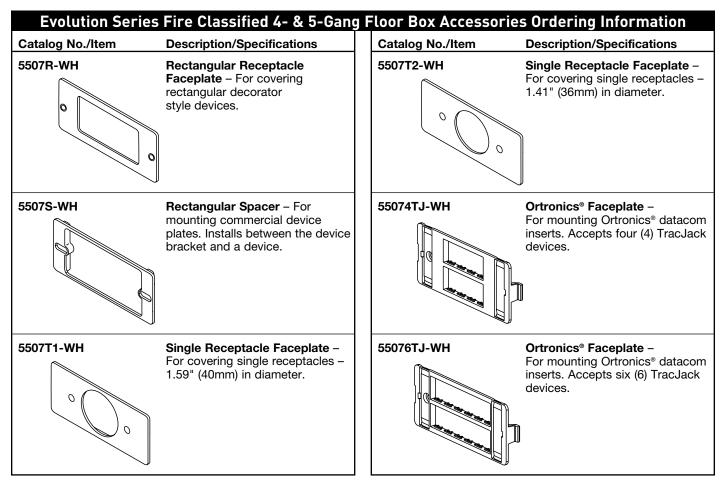

NOTE: Country of Origin for all Evolution Series Fire Classified 4- & 5-Gang Floor Box Accessories shown on this page is USA.

Evolution Series Fire Classified 4- & 5-Gang Floor Box Covers Ordering Information Catalog No./Item **Description/Specifications EFB45CTCBK** Surface Style Cover with **EFB45CTCGY** Floor Insert - Low profile cover **EFB45CTCBS** designed to attach to the EFB45S style floor boxes. Each cover is **EFB45CTCNK EFB45CTCBZ** made of die cast aluminum and **EFB45CTCAL** is equipped with a durable hinge allowing the cover to rotate open 180°, a 1/4" deep recessed area to accept the finished floor covering, and two (2) slide egress doors that lock in the open position and automatically close around the cables when the cover is closed. The flange has a beveled edge that meets ADA guidelines and reduces tripping hazards. These cover assemblies are designed to sit on top of finished floors such as: carpet, tile, wood, polished concrete, and terrazzo. Available in six (6) powder coat finishes: black (BK), gray (GY), brass (BS), nickel (NK), aluminum (AL) and bronze (BZ). Country of Origin: India NOTE: Depth of recess area in 16 3/8" 12 1/2" (416mm) plate is 1/4" (6.35mm). (318mm) **EFB45BTCBK Surface Style Cover With EFB45BTCGY** Solid Lid - Low profile cover **EFB45BTCBS** designed to attach to the EFB45S style floor boxes. Each cover is **EFB45BTCNK EFB45BTCBZ** made of die cast aluminum and **EFB45BTCAL** is equipped with a durable hinge allowing the cover to rotate open 180°, and two (2) slide egress doors that lock in the open position and automatically close around the cables when the cover is closed. The flange has a beveled edge that meets ADA guidelines and reduces tripping hazards. These cover assemblies are designed to sit on top of finished floors such as: carpet, tile, wood, polished concrete, and terrazzo. Available in six (6) powder coat finishes: black (BK), gray (GY), brass (BS),


nickel (NK), aluminum (AL) and

Country of Origin: India

bronze (BZ).

12 1/2¹

16 3/8

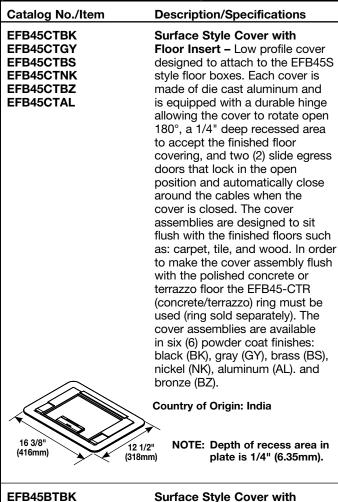

EFB45BTGY Floor Insert - Low profile cover designed to attach to the EFB45S **EFB45BTBS EFB45BTNK** style floor boxes. Each cover is **EFB45BTBZ** made of die cast aluminum and is **EFB45BTAL** equipped with a durable hinge which allows the cover to rotate open 180°, and two (2) slide egress doors that lock in the open position and automatically close around the cables when the cover is closed. The cover assemblies are designed to sit flush with the finished floors such as: carpet, tile, and wood. In order to make the cover assembly flush with the polished concrete or terrazzo floor the EFB45-CTR (concrete/terrazzo) ring must be used (ring sold separately). The cover assemblies are available in six (6) powder coat finishes: black (BK), gray (GY), brass (BS), nickel (NK), aluminum

16 3/8 . 12 1/2" (416mm)


(AL) and bronze (BZ). Country of Origin: India

Evolution Series Fire Classified 4- & 5-Gang Floor Box Covers Ordering Information

Catalog No./Item EFB45CTCBKTR

EFB45CTCBKTR EFB45CTCGYTR EFB45CTCBSTR EFB45CTCNKTR EFB45CTCBZTR EFB45CTCALTR **Description/Specifications**

Surface Style Cover with Floor Insert - Low profile cover designed to attach to the EFB45S style floor boxes. Each cover is made of die cast aluminum and is equipped with a tamperresistant screw to help keep out unauthorized personnel, a durable hinge which allows the cover to rotate open 180°, a 1/4" deep recessed area to accept the finished floor covering, and two (2) slide egress doors that lock in the open position and automatically close around the cables when the cover is closed. The flange has a beveled edge that meets ADA guidelines and reduces tripping hazards. These cover assemblies are designed to sit on top of the finished floors such as: carpet, tile, wood, polished concrete, and terrazzo. Available in six (6) powder coat finishes: black (BK), gray (GY), brass (BS), nickel (NK), aluminum (AL) and bronze (BZ).



EFB45CTBKTR

EFB45CTGYTR

EFB45CTBSTR


EFB45CTNKTR

EFB45CTBZTR

EFB45CTALTR

Flush Style Cover with

Floor Insert - Low profile cover designed to attach to the EFB45S style floor boxes. Each cover is made of die cast aluminum and is equipped with a tamperresistant screw to help keep out unauthorized personnel, a durable hinge which allows the cover to rotate open 180°, a 1/4" deep recessed area to accept the finished floor covering, and two (2) slide egress doors that lock in the open position and automatically close around the cables when the cover is closed. The cover assemblies are designed to sit flush with the finished floors such as: carpet, tile, and wood. In order to make the cover assembly flush with the polished concrete or terrazzo floor the EFB45-CTR (concrete/terrazzo) ring must be used (trim ring sold separately). The cover assemblies are available in six (6) powder coat finishes: black (BK), gray (GY), brass (BS), nickel (NK), aluminum (AL) and bronze (BZ).



Country of Origin: India

Catalog No./Item

EFB45BTCBKTR EFB45BTCGYTR EFB45BTCBSTR EFB45BTCNKTR EFB45BTCBZTR EFB45BTCALTR **Description/Specifications**


Surface Style Cover with Floor Insert - Low profile cover designed to attach to the EFB45S style floor boxes. Each cover is made of die cast aluminum and is equipped with a tamperresistant screw to help keep out unauthorized personnel, a durable hinge which allows the cover to rotate open 180°, a 1/4" deep recessed area to accept the finished floor covering, and two (2) slide egress doors that lock in the open position and automatically close around the cables when the cover is closed. The flange has a beveled edge that meets ADA quidelines and reduces tripping hazards. These cover assemblies are designed to sit on top of the finished floors such as: carpet, tile, wood, polished concrete, and terrazzo. Available in six (6) powder coat finishes: black (BK), gray (GY), brass (BS), nickel (NK), aluminum (AL) and bronze (BZ).



Country of Origin: India

EFB45BTBKTR EFB45BTGYTR EFB45BTBSTR EFB45BTNKTR EFB45BTBZTR EFB45BTALTR Flush Style Cover with

Floor Insert - Low profile cover designed to attach to the EFB45S style floor boxes. Each cover is made of die cast aluminum and is equipped with a tamperresistant screw to help keep out unauthorized personnel, a durable hinge which allows the cover to rotate open 180°, and two (2) slide egress doors that lock in the open position and automatically close around the cables when the cover is closed. The cover assemblies are designed to sit flush with the finished floors such as: carpet, tile, and wood. In order to make the cover assembly flush with the polished concrete or terrazzo floor the EFB45-CTR (concrete/terrazzo) ring must be used (ring sold separately). The cover assemblies are available in six (6) powder coat finishes: black (BK), gray (GY), brass (BS), nickel (NK), aluminum (AL) and bronze (BZ).





Country of Origin: India


Description/Specifications Catalog No./Item EFB45-CTR **Bare Concrete/Terrazzo** Trim Ring - Nonmetallic ring for use with bare concrete and terrazzo floor applications. Country of Origin: USA 16 3/8 12 1/2" (318mm) NOTE: Ring must be (416mm) attached to the floor box before pouring concrete or terrazzo. EFB45-TS Tile Shim - Used for floor coverings greater than 3/16" (4.7mm). The EFB45-TS allows the finished cover assembly to

be flush with the finished floor. Includes one (1) 1/16" (1.6mm), one (1) 1/8" (3.2mm) and one 1/4" (6.4mm) tile shims for 7/16" (11.1mm) of upward adjustment.

Country of Origin: USA

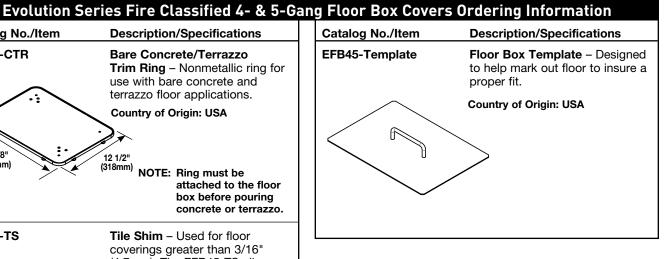

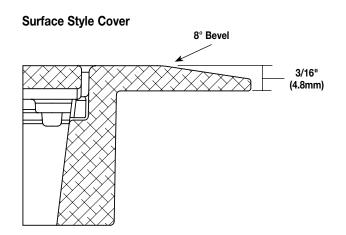

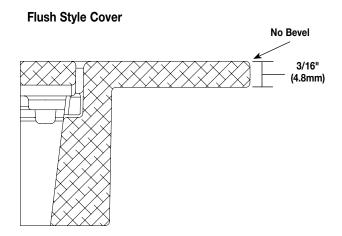



Evolution Series Floor Box Covers are available in powder-coated finishes of: (L to R) brass, black, gray, nickel, bronze and aluminum.

Evolution Series Fire Classified 6-Gang Floor Box Ordering Information

Catalog No./Item

EFB6S-FC 11 3/16" 15 1/8" (384mm) 4 1/4" (108mm) 17 1/4 (552mm) (438mm)


Description/Specifications

6-Gang Fire Classified Floor Box - Pre-assembled installation ready floor box has been designed to be installed in above grade concrete floors while maintaining the fire classification of the floor. This box is classified to be used in the 2-hour fire rated floors. Designed to accept standard size wall plates. Box comes complete with all components needed for initial installation.

Country of Origin: USA

Components Included:

- Protective/Disposable Cover
- Tunnel System connects the two modules of compartments
- Fire Classified Pan
- Two (2) Removable Modules
- Back Box (1 per module)
- Device Mounting Brackets (1 per module)
- Removable Repositionable Divider (1 per module)
- Four (4) 1 1/4" (32mm) Intumescent Conduit Feeds
- Two (2) Cable Management Guides




- Receptacles
- · Communication Jacks
- A/V Devices
- · Device plates



NOTES: Designed for new construction applications.

Consult structural engineer before making cuts into decking. Add additional supports as instructed by the structural engineer.

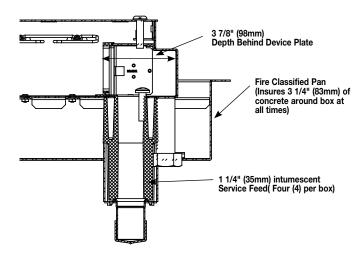

Evolution Series Fire Classified 6-Gang Floor Box Ordering Information (continued)

Catalog No./Item

EFB6S-FC1122 15 1/8" (384mm) (384mm) (108mm) 17 1/4" (438mm)


Description/Specifications

6-Gang Fire Classified Floor Box – Pre-assembled installation ready floor box has been designed to be installed in above grade concrete floors while maintaining the fire classification of the floor. This box is classified to be used in 1-, 1 1/2-, 2-, or 3-hour fire rated floors. Designed to accept standard size wall plates. **Box comes complete with all components needed for initial installation.**

Country of Origin: USA

Components Included:

- Protective/Disposable Cover
- Tunnel System connects the two modules of compartments
- Fire Classified Pan
- Two (2) Removable Modules
- Back Box (1 per module)
- Device Mounting Brackets (1 per module)
- Removable Repositionable Divider (1 per module)
- Two (2) 1 1/4" (32mm) Intumescent Conduit Feeds
- Two (2) 2" (51mm) Intumescent Conduit Feeds
- Two (2) Cable Management Guides




- Receptacles
- Communication Jacks
- A/V Devices
- Device plates



NOTES: Designed for new construction applications.


Consult structural engineer before making cuts into decking. Add additional supports as instructed by the structural engineer.

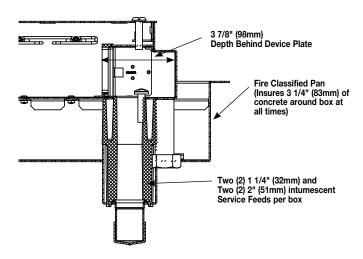

Evolution Series Fire Classified 6-Gang Floor Box Ordering Information (continued)

Catalog No./Item

Description/Specifications



6-Gang Fire Classified Floor Box – Pre-assembled installation ready floor box has been designed to be installed in above grade concrete floors while maintaining the fire classification of the floor. This box is classified to be used in 1-, 1 1/2-, 2-, or 3-hour fire rated floors. Designed to accept standard size wall plates. **Box comes complete with all components needed for initial installation.**

Country of Origin: USA

Components Included:

- Protective/Disposable Cover
- Tunnel System connects the two modules of compartments
- Fire Classified Pan
- Two (2) Removable Modules
- Back Box (1 per module)
- Device Mounting Brackets (1 per module)
- Removable Repositionable Divider (1 per module)
- Four (4) 2" (51mm) Intumescent Conduit Feeds
- Two (2) Cable Management Guides


Items not included with the box and sold separately:

- Receptacles
- Communication Jacks
- A/V Devices
- Device plates



NOTES: Designed for new construction applications.

Consult structural engineer before making cuts into decking. Add additional supports as instructed by the structural engineer.

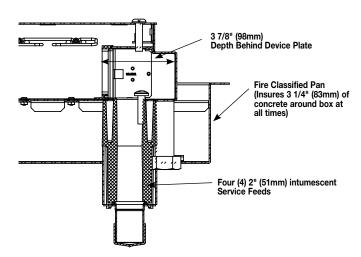


Evolution Series Fire Classified 6-Gang Floor Box Accessories Ordering Information Catalog No./Item **Description/Specifications** Catalog No./Item **Description/Specifications** EFB6-MB Mounting Bracket - Holds up to EFB-B Blank Device Plate - Device plate dimensions: 2 3/4" x 4 1/2" three (3) devices of power, communications or audio/video (69mm x 114mm). devices. Bracket accepts standard size (2 3/4" x 4 1/2" (70mm x 114mm)) device plates sold separately by others. **EFB6-TUN** Tunnel - 6-gang tunnel allows for **EFB-AAP** cables to be wrapped around box Device Plate - Holds 2 Extron Electronics AAP devices. Device from one module to the other. plate dimensions: 2 3/4" x 4 1/2" (69mm x 114mm). **EFB6-DIV** Relocatable Divider - Provides **EFB-MAAP** Device Plate - Holds 4 Legrand separation of services. Includes AVIP or Extron Electronics MAAP one (1) divider plate. devices. Device plate dimensions: 2 3/4" x 4 1/2" (69mm x 114mm). **EFBCMG** Cable Management Guides -**EFB-MOS Device Plate -** European device Guides help organize and maintain cable position when plate accepts up to (45mm x 67.5mm) Arteor device. Device opening and closing the cover. plate dimensions: 2 3/4" x 4 1/2" (69mm x 114mm). NOTE: Not designed for use with adorne devices.

NOTE: Country of Origin for all Evolution Series Fire Classified 6-Gang Floor Box Accessories shown on this page is USA.

Evolution Series Fire Classified 8-Gang Floor Box Ordering Information (continued)

Catalog No./Item

EFB8S-FC



Description/Specifications

8-Gang Fire Classified Floor Box - Pre-assembled installation ready floor box has been designed to be installed in above grade concrete floors while maintaining the fire classification of the floor. This box is classified to be used in 2-hour fire rated floors. Designed to accept standard size wall plates. Box comes complete with all components needed for initial installation.

Country of Origin: USA

Components Included:

- Protective/Disposable Cover
- Tunnel System connects the two modules of compartments
- Fire Classified Pan
- Two (2) Removable Modules
 - Back Box (1 per module)
 - Device Mounting Brackets (1 per module)
- Removable Repositionable Divider (1 per module)
- Four (4) 1 1/4" (32mm) Intumescent Conduit Feeds
- Two (2) Cable Management Guides


Items not included with the box and sold separately:

- Receptacles
- Communication Jacks
- A/V Devices
- · Device plates



NOTES: Designed for new construction applications.


Consult structural engineer before making cuts into decking. Add additional supports as instructed by the structural engineer.

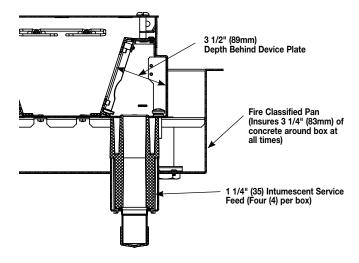

Evolution Series Fire Classified 8-Gang Floor Box Ordering Information (continued)

Catalog No./Item

EFB8S-FC1122



Description/Specifications

8-Gang Fire Classified Floor Box – Pre-assembled installation ready floor box has been designed to be installed in above grade concrete floors while maintaining the fire classification of the floor. This box is classified to be used in 1-, 1 1/2-, 2-, or 3-hour fire rated floors. Designed to accept standard size wall plates. **Box comes complete with all components needed for initial installation.**

Country of Origin: USA

Components Included:

- Protective/Disposable Cover
- Tunnel System connects the two modules of compartments
- Fire Classified Pan
- Two (2) Removable Modules
 - Back Box (1 per module)
 - Device Mounting Brackets (1 per module)
 - Removable Repositionable Divider (1 per module)
- Two (2) 1 1/4" (32mm) Intumescent Conduit Feeds
- Two (2) 2" (51mm) Intumescent Conduit Feeds
- Two (2) Cable Management Guides


Items not included with the box and sold separately:

- Receptacles
- Communication Jacks
- A/V Devices
- Device plates



NOTES: Designed for new construction applications.

Consult structural engineer before making cuts into decking. Add additional supports as instructed by the structural engineer.

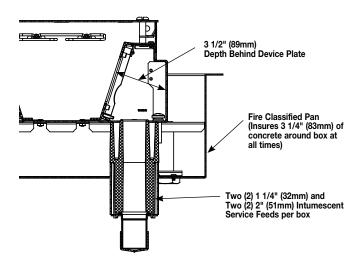

Evolution Series Fire Classified 8-Gang Floor Box Ordering Information (continued)

Catalog No./Item

EFB8S-FC2222

17 1/4"

(438mm)

15 1/8" (284mm) (384mm) 6 1/4"

21 3/41

Description/Specifications

8-Gang Fire Classified Floor Box –Pre-assembled installation ready floor box has been designed to be installed in above grade concrete floors while maintaining the fire classification of the floor. This box is classified to be used in 1-, 1 1/2-, 2-, or 3-hour fire rated floors. Designed to accept standard size wall plates. **Box comes complete with all components needed for initial installation.**

Country of Origin: USA

Components Included:

- Protective/Disposable Cover
- Tunnel System connects the two modules of compartments
- Fire Classified Pan
- Two (2) Removable Modules
 - Back Box (1 per module)
 - Device Mounting Brackets (1 per module)
- Removable Repositionable Divider (1 per module)
- Four (4) 2" (51mm) Intumescent Conduit Feeds
- Two (2) Cable Management Guides


Items not included with the box and sold separately:

- Receptacles
- Communication Jacks
- A/V Devices
- · Device plates



NOTES: Designed for new construction applications.

Consult structural engineer before making cuts into decking. Add additional supports as instructed by the structural engineer.

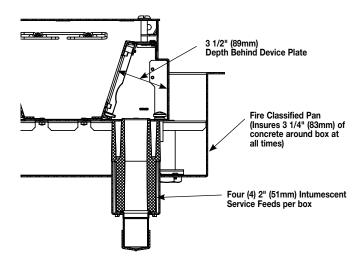

Evolution Series Fire Classified 8-Gang Floor Box Accessories Ordering Information

Catalog No./Item


Description/Specifications

EFB8-MB



Mounting Bracket - Holds up to four (4) devices for power, communications or audio/video. Bracket accepts standard size (2 3/4" x 4 1/2" (70mm x 114mm)) device plates sold separately by others.

EFB8S-22GMB




Mounting Bracket - Equipped with two (2) 2-gang standard size device openings for a standard 2-gang (4 9/16" x 4 1/2" (116mm x 114mm)). Ideal for 2-gang A/V devices such as Crestron® 2-gang digital media devices. Device plates and devices supplied by others.

EFB8S-4GMB



Mounting Bracket - Holds a standard 4 gang device plate. Device plate dimensions: 8 1/8" x 4 1/4" (206mm x 116mm).

EFB-AAP




Device Plate - Holds two (2) Extron Electronics AAP devices. Device plate dimensions: 2 3/4" x 4 1/2" (69mm x 114mm).

EFB-MAAP



Device Plate - Holds four (4) Legrand AVIP or Extron Electronics MAAP devices. Device plate dimensions: 2 3/4" x 4 1/2" (69mm x 114mm).


EFB-MOS



Device Plate - European device plate accepts up to 45mm x 67.5mm Arteor device. Device plate dimensions: 2 3/4" x 4 1/2" (69mm x 114mm).

NOTE: Not designed for use with adorne devices.


EFB-B



Blank Device Plate - Device plate dimensions: 2 3/4" x 4 1/2" (69mm x 114mm).

Catalog No./Item


EFB810-TUN



Description/Specifications


Tunnel - For EFB8 Series and EFB10 Series boxes. Tunnel allows cables to be wrapped around box from one module to the other.

EFB810-DIV




Relocatable Divider - Provides separation of services. Includes one divider plate.

EFB-CMG



Cable Management Guides -Guides help organize and maintain cable position when opening and closing the cover.


EFB-50A



50A Adapter - Allows for a 50A device to be installed on the 8gang and 10-gang boxes.

NOTE: Only fits on the side of the floor box where the device is facing the tunnel, as shown below.






NOTE: Country of Origin for all Evolution Series Fire Classified 8-Gang Floor Box Accessories shown on this page is USA.

Evolution Series Fire Classified 10-Gang Floor Box Ordering Information (continued)

Catalog No./Item

EFB10S-FC 11 3/16" 15 1/8" (284mm)



Description/Specifications

10-Gang Fire Classified Floor Box - Pre-assembled installation ready floor box has been designed to be installed in above grade concrete floors while maintaining the fire classification of the floor. This box is classified to be used in 2-hour fire rated floors. Designed to accept standard size wall plates. Box comes complete with all components needed for initial installation.

Country of Origin: USA

Components Included:

- Protective/Disposable Cover
- Tunnel System connects the two modules of compartments
- Fire Classified Pan
- Two (2) Removable Modules
 - Back Box (1 per module)
 - Device Mounting Brackets (1 per module)
 - Removable Repositionable Divider (1 per module)
- Four (4) 1 1/4" (32mm) Intumescent Conduit Feeds
- Two (2) Cable Management Guides


Items not included with the box and sold separately:

- Receptacles
- Communication Jacks
- A/V Devices
- Device plates



NOTES: Designed for new construction applications.

Consult structural engineer before making cuts into decking. Add additional supports as instructed by the structural engineer.

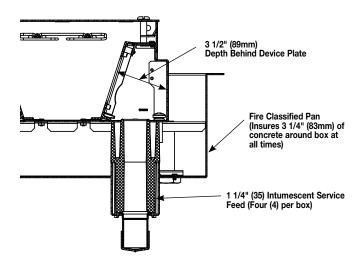

Evolution Series Fire Classified 10-Gang Floor Box Ordering Information (continued)

Catalog No./Item

EFB10S-FC1122 11 3/16" (284mm) 15 1/8" (384mm) 6 1/4" 21 3/4" 17 1/4" (438mm)


Description/Specifications

10-Gang Fire Classified Floor Box - Pre-assembled installation ready floor box has been designed to be installed in above grade concrete floors while maintaining the fire classification of the floor. This box is classified to be used in 1-, 1 1/2-, 2-, or 3-hour fire rated floors. Designed to accept standard size wall plates. Box comes complete with all components needed for initial installation.

Country of Origin: USA

Components Included:

- Protective/Disposable Cover
- Tunnel System connects the two modules of compartments
- Fire Classified Pan
- Two (2) Removable Modules
- Back Box (1 per module)
- Device Mounting Brackets (1 per module)
- Removable Repositionable Divider (1 per module)
- Two (2) 1 1/4" (32mm) Intumescent Conduit Feeds
- Two (2) 2" (51mm) Intumescent Conduit Feeds
- Two (2) Cable Management Guides




Items not included with the

- Communication Jacks
- A/V Devices
- · Device plates



NOTES: Designed for new construction applications.

Consult structural engineer before making cuts into decking. Add additional supports as instructed by the structural engineer.

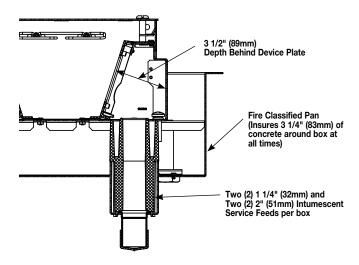

Evolution Series Fire Classified 10-Gang Floor Box Ordering Information (continued)

Catalog No./Item

EFB10S-FC2222 11 3/16" 15 1/8" (284mm) (384mm) 6 1/4" 21 3/4' 17 1/4" (438mm)

Description/Specifications

10-Gang Fire Classified Floor Box - Pre-assembled installation ready floor box has been designed to be installed in above grade concrete floors while maintaining the fire classification of the floor. This box is classified to be used in 1-, 1 1/2-, 2-, or 3-hour fire rated floors. Designed to accept standard size wall plates. Box comes complete with all components needed for initial installation.

Country of Origin: USA

Components Included:

- Protective/Disposable Cover
- Tunnel System connects the two modules of compartments
- Fire Classified Pan
- Two (2) Removable Modules
 - Back Box (1 per module)
 - Device Mounting Brackets (1 per module)
- Removable Repositionable Divider (1 per module)
- Four (4) 2" (51mm) Intumescent Conduit Feeds
- Two (2) Cable Management Guides


Items not included with the box and sold separately:

- Receptacles
- Communication Jacks
- A/V Devices
- Device plates



NOTES: Designed for new construction applications.

Consult structural engineer before making cuts into decking. Add additional supports as instructed by the structural engineer.

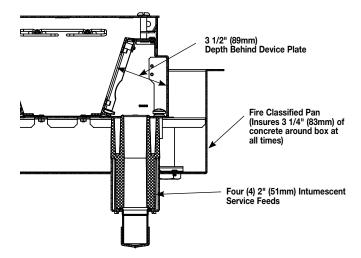

Evolution Series Fire Classified 10-Gang Floor Box Accessories Ordering Information

Catalog No./Item


Description/Specifications

EFB10-MB



Mounting Bracket – Holds up to five (5) devices for power, communications or audio/video. Bracket accepts EFB10 Series device plates (2 1/32" x 4 5/8") (58mm x 117mm) device plates sold separately.


EFB10S-23GMB



Mounting Bracket – Equipped with one 2-gang standard size device opening and one 3-gang standard size device opening.

Accepts a standard 2-gang (4 9/16" x 4 1/2" (116mm x 114mm)) and a 3-gang (6 3/8" x 4 1/2" (162mm x 114mm)) device plate. Ideal for 2-gang A/V devices such as Crestron® 2-gang and 3-gang digital media devices. Device plates and devices supplied by others.

EFB10S-5GMB



Mounting Bracket – Holds a standard 5 gang device plate Device plate dimensions: 10" x 4 1/2" (254mm x 116mm).

EFB10-B




Blank Device Plate – Device plate dimensions: 2 5/16" x 4 5/8" (58mm x 118mm).

EFB10-DP



Duplex Device Plate – Device plate dimensions: 2 5/16" x 4 5/8" (58mm x 118mm). Includes receptacle spacers.


EFB10-DEC



Decorator Style Device Plate – For use with decorator style receptacles, GFCI receptacle, and decorator style audio/video devices. Device plate dimensions: 2.3" x 4.652" (58mm x 118mm). Includes receptacle spacers.

Catalog No./Item


EFB10-S1



Description/Specifications


Knockout Plate – Single receptacle 1.39" (35mm). diameter. Device plate dimensions: 2.3" x 4.652" (58mm x 118mm). Includes receptacle spacers.

EFB10-S2




Knockout Plate – Single receptacle 1.59" (40mm). diameter. Device plate dimensions: 2.3" x 4.652" (58mm x 118mm). Includes receptacle spacers.

EFB10-6AB




Device Plate – Accepts up to three (3) dual Wiremold CM2 Series Open System communication adapters. Adapters sold separately. Device plate dimensions: 2.3" x 4.652" (58mm x 118mm).

EFB10-3S2




Device Plate – Accepts up to three (3) Ortronics® Series II devices. Ortronics® devices sold separately. Device plate dimensions: 2.3" x 4.652" (58mm x 118mm).

EFB10-2C



Device Plate – Accepts one dual Wiremold CM2 Series Open System adapter, or one Ortronics® Series II adapter, or one Ortronics® TracJack adapter. Adapters sold separately. Device plate dimensions: 2.3" x 4.652" (58mm x 118mm).

EFB10-AAP




Device Plate – Holds two (2) Extron Electronics AAP devices. Device plate dimensions: 2.3" x 4.652" (58mm x 118mm).

NOTE: Country of Origin for all Evolution Series Fire Classified 10-Gang Floor Box Accessories shown on this page is USA.

Evolution Series Fire Classified 10-Gang Floor Box Accessories Ordering Information (continued) **Description/Specifications** Catalog No./Item **Description/Specifications** Catalog No./Item **EFB10-MAAP** Device Plate - Holds four (4) 5507T1-WH Single Receptacle Faceplate -Legrand AVIP or Extron For covering single receptacles -Electronics MAAP devices. 1.59" (40mm) in diameter. Device plate dimensions: 2.3" x 4.652" (58mm x 118mm). **EFB10-MOS** Device Plate - (45mm x 67.5mm) 5507T2-WH Single Receptacle Faceplate device plate. Device plate For covering single receptacles dimensions: 2.3" x 4.652" 1.41" (36mm) in diameter. (58mm x 118mm). 0 NOTE: Not designed for use with adorne devices. 5507B-WH 55074TJ-WH Blank Faceplate - For covering Ortronics® Faceplate unused compartments in the For mounting Ortronics® datacom device bracket. inserts. Accepts four (4) TracJack devices. 5507D-WH 55076TJ-WH **Duplex Receptacle Faceplate -**Ortronics® Faceplate -For covering duplex style devices. For mounting Ortronics® datacom Also accepts 106 inserts. Accepts six (6) TracJack communications frame. devices. 5507R-WH **Rectangular Receptacle** Faceplate - For covering EFB810-TUN Tunnel - For EFB8 Series and rectangular decorator EFB10 Series boxes. Tunnel style devices. allows cables to be wrapped around box from one module to the other. 5507S-WH Rectangular Spacer - For mounting commercial device EFB810-DIV Relocatable Divider – Provides plates. Installs between the device bracket and a device. separation of services. Includes one divider plate.


NOTE: Country of Origin for all Evolution Series Fire Classified 10-Gang Floor Box Accessories shown on this page is USA.

| Evolution Series Fire Classified 10-Gang Floo | | |
|--|---|--|
| Catalog No./Item | Description/Specifications | |
| EFB-CMG | Cable Management Guides – Guides help organize and maintain cable position when opening and closing the cover. | |
| | | |

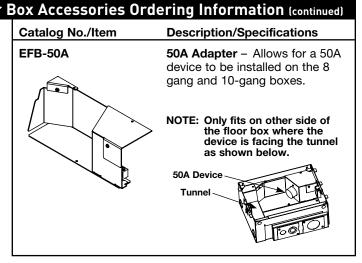

NOTE: Country of Origin for all Evolution Series Fire Classified 10-Gang Floor Box Accessories shown on this page is USA.

Evolution Series Fire Classified 10-Gang Floor Box Covers Ordering Information Catalog No./Item **Description/Specifications** EFB610CTCBK Surface Style Cover with **EFB610CTCGY** Carpet Insert - Die cast aluminum **EFB610CTCBS** cover assembly designed to be **EFB610CTCNK** used on top of the floor covering. EFB610CTCBZ Available in the following powder coated finishes: black (BK), gray (GY), brass (BS), nickel (NK) and bronze (BZ). For use on Evolution Series 6-, 8- and 10-gang floor boxes (EFB6, EFB8 and EFB10). Country of Origin: India 16 3/8 NOTE: Depth of recess area in 12 1/2" (416mm) plate is 1/4" (6.35mm). EFB610CTBK Flush Style Cover with **EFB610CTGY** Carpet Insert - Die cast aluminum **EFB610CTBS** cover assembly designed to be **EFB610CTNK** used level (flush) with finish floor covering. Available in the following EFB610CTBZ powder coated finishes: black (BK), gray (GY), brass (BS), nickel (NK) and bronze (BZ). For use on Evolution Series 6-, 8- and 10gang floor boxes (EFB6, EFB8 and EFB10). Country of Origin: India NOTE: Depth of recess area in 16 3/81 12 1/2¹ (416mm) plate is 1/4" (6.35mm). (318mm) Surface Style Cover with EFB610BTCBK Solid Lid - Die cast aluminum **EFB610BTCGY EFB610BTCBS** cover assembly designed to be **EFB610BTCNK** used on top of floor covering. EFB610BTCBZ Available in the following powder coated finishes: black (BK), gray (GY), brass (BS), nickel (NK) and bronze (BZ). For use on Evolution

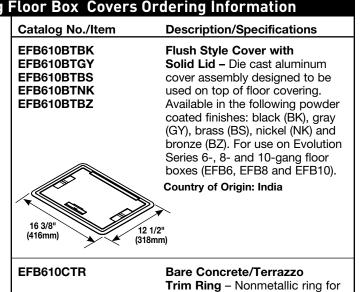

use with bare concrete and terrazzo floor applications. Country of Origin: USA NOTE: Ring must be attached to the floor 12 1/2" box before pouring 16 3/81 (318mm) concrete or terrazzo. (416mm)



Tile Shim - Used for floor coverings greater than 3/16" (4.7mm). The EFB610-TS allows the finished cover assembly to be flush with the finished floor. Includes one (1) 1/16" (1.6mm), one (1) 1/8" (3.2mm) and one 1/4" (6.4mm) tile shims for 7/16" (11.1mm) of upward adjustment.

Country of Origin: USA

NOTE: All brand and product names referenced in this document are registered trademarks or trademarks of their respective holders.

12 1/2

(318mm)

Series 6-, 8- and 10-gang floor boxes (EFB6, EFB8 and EFB10).

Country of Origin: India



Electrical Wiring Systems

60 Woodlawn Street West Hartford, CT 06110 Phone: 1.877.BY.LEGRAND (295-3472) www.legrand.us

570 Applewood Crescent Vaughan, Ontario L4K 4B4 Phone:905.738.9195 www.legrand.ca

16 3/8

(416mm)