

Ordering Information

Description	UPC Number	Catalog Number
3P 4W LINKOSITY® single ended (female) 5-50 foot cable		PF3004PAXXX

Listings


UL 2238; UL 50E
IP67

Specifications

Contact Carrier	Nylon 6/6, white
Cable (16 AWG and Up)	UL 600V Type TC-ER, MTW 90°C or STOOW 600V 105°C

Performance

Electrical	
Amperage	Up to 30A
Voltage	Up to 600V AC
Environmental	
Flammability	UL94HB
Ingress Protection	IP67 Suitability
Moisture Resistance	UL Type 4, 4X, 12 and 13

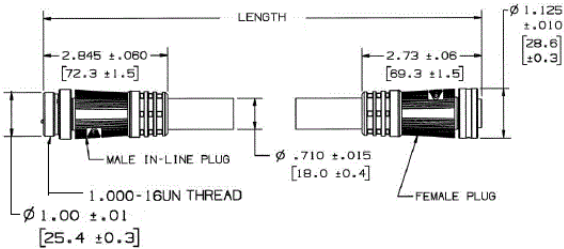

Complementary Products

Type 1 Non-Metallic Enclosure 30A 3 Pole 600V AC	HBL1389MQR, HBL1389MQ5, HBL1389MQR2
Type 4X Non-Metallic Labelless Enclosure 30A 3 Pole 600V AC	HBLDS3MQR, HBLDS3MQ5, HBLDS3MQR2
Type 4X Stainless Steel Enclosure 30A 3 Pole 600V AC, Sloped	HBLDS3SSRMQR, HBLDS3SSRMQ5, HBLDS3SSRMQR2
Type 4X Stainless Steel Enclosure 30A 3 Pole 600V AC, Square	HBLDS3SSMQR, HBLDS3SSMQ5, HBLDS3SSMQR2

Online Resources

eCatalog