



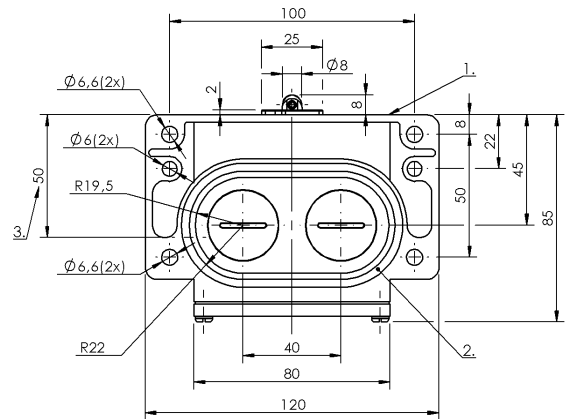

1) Reference edge, 2) Sealing ring, 3) Cable passage, 4) Mark. Safety switch position

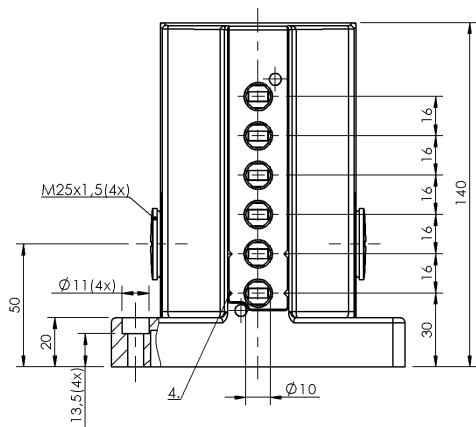

Display/Operation

Function indicator 1-6. Switch position: None

Electrical connection

Connection type 1-6. Switch position: Screw terminal

Electrical data

Continuous current 1-6. Switch position: 6 A
Rated operating voltage U_e 1-6. Switch position: 250 V AC
Switching rate 1-6. Switch position: 300/min

Environmental conditions

Ambient temperature -5...85 °C
IP rating IP67

Functional safety

B10d (EN ISO 13849-1) BSE 30.0: 30 mil. Switching operations
BSE 61: 30 mil. Switching operations

General data

Approval/Conformity CE
CSA
WEEE
Basic standard IEC 60947-5-1
DIN switch DIN 43697
Operating principle 1-6. Switch position: Mechanical
Version Safety EN 60204-1

Material

Housing material Aluminum
Housing material, surface protection Anodized
Material contacts 1-2. Switch position: Silver
3-6. Switch position: Silver, gold plated
Plunger material 1-6. Switch position: Stainless steel (1.4034)

Mechanical Cam Switches
BNS 813-D06-R16-100-10-02
Order Code: BNS015C

BALLUFF

Mechanical data

Approach direction	longitudinal, parallel to attachment surface
Approach speed	1-6. Switch position: 60 m/min
Dimension	120 x 140 x 84 mm
Distance cam - reference edge	1-6. Switch position: 4.50...5.00 mm
Flange, feed-through	2 threaded exit M25
Installation	Vertical
Life expectancy mechanical	1-6. Switch position: 30 million Switching operations

Number of switching positions	6x Roller
Plunger spacing 1st switch position	30 mm
Plunger style	1-6th switch position: Roller
Switch actuation force	1-2. Switch position: 15 N 3-6. Switch position: 20 N
Switching element	1-2. Switch position: BSE 61 3-6. Switch position: BSE 30.0

Range/Distance

Reproducibility	1-6. Switch position: ± 0.01 mm
Switch position spacing	16 mm

Wiring Diagrams

