


Compact Multiprotocol RFID Module for Ethernet interface for 2 BL ident read-write heads (HF/UHF) TBEN-S2-2RFID-4DXP

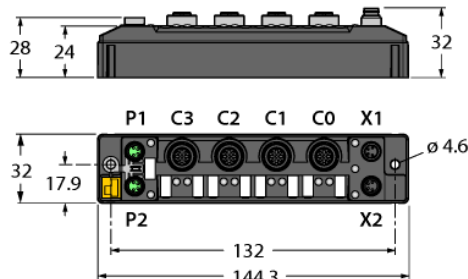

- PROFINET Device, Ethernet/IP Device or Modbus TCP Slave
- PROFINET S2 system redundancy
- Integrated Ethernet switch
- 10 Mbps/100 Mbps supported
- Glass fiber reinforced housing
- Shock and vibration tested
- Fully potted module electronics
- Protection classes IP65, IP67, IP69K
- Integration in PLC systems without special function blocks
- Up to 128 bytes of user data per read/write cycle per channel and use of fragments with 16 kilobytes of FIFO memory each
- Data interface for convenient use of the RFID functions
- Continuous HF bus mode with up to 32 HF read/write heads per channel
- 2 channels with M12 connection for RFID
- Mixed operation of HF and UHF read/write heads
- 4 universal digital channels, configurable as PNP inputs or 0.5-A outputs
- Integrated web server with reader parameterization
- Web-based RFID test tool for easy air interface evaluation
- LED displays and diagnostics
- FLC/ARGEES programmable

Type designation	TBEN-S2-2RFID-4DXP
Ident-No.	6814029
Supply	
Supply voltage	24 VDC
Admissible range	18...30 VDC total current max. 4 A per voltage group; total current V1 + V2 max. 5.5 A at 70 °C per module
Voltage supply connection	2 x M8, 4-pin
Operating current	V1: max. 120 mA V2: max. 30 mA
RFID supply V_{AUX1}	Ports C0-C1, V1 short-circuit proof, 1.2 A $\leq$ 55 °C, 55 °C < 0.5 A $\leq$ 70 °C per channel
Sensor/Actuator supply V_{AUX2}	Supply ports C2-C3 from V2 short-circuit proof, 0.14 A $\leq$ 55 °C, 55 °C < 0.05 A $\leq$ 70 °C
Electrical isolation	galvanic isolation of the voltage groups V1 and V2, voltages up to 500 VAC
System data	
Transmission rate Ethernet	10 Mbps / 100 Mbps
Connection technology Ethernet	2 x M8, 4-pin, D-coded
Protocol detection	automatic
Web server	Default: 192.168.1.254
Service interface	Ethernet via P1 or P2
Field Logic Controller (FLC)	
ARGEES Firmware Version	3.3.5.0
ARGEES Engineering Version	2.0.26.0
Modbus TCP	
Addressing	Static IP, BOOTP, DHCP
Supported function codes	FC1, FC2, FC3, FC4, FC5, FC6, FC15, FC16, FC23
Number of TCP connections	8
Input register start address	0 (0x0000 hex)
Output register start address	2048 (0x0800 hex)
Ethernet/IP	
Addressing	acc. to EtherNet/IP specification
Quick Connect (QC)	< 500 ms
Device Level Ring (DLR)	supported
Class 3 connections (TCP)	3
Class 1 connections (CIP)	10
Input Assembly Instance	103
Output Assembly Instance	104
Configuration Assembly Instance	106

Compact Multiprotocol RFID Module for Ethernet interface for 2 BL ident read-write heads (HF/UHF)

TBEN-S2-2RFID-4DXP

PROFINET

Addressing	DCP
Conformance class	B (RT)
MinCycleTime	1 ms
Fast Start-Up (FSU)	< 500 ms
Diagnostics	acc. to PROFINET alarm handling
Topology detection	supported
Automatic addressing	supported
Media Redundancy Protocol (MRP)	supported
System redundancy	S2

RFID

Number of channels	2
Connectivity	M12
Power supply	1.2 A ≤ +55 °C, +55 °C < 0.5 A ≤ +70 °C per channel, short-circuit proof
Operation per channel	1 × HF or UHF read/write head, up to 32 bus-compatible HF read/write heads with termination/C53 (additional power supply may be needed)
RFID data interface	HF und UHF
Cable length	max. 50 m

Digital inputs

Number of channels	4
Connectivity inputs	M12, 5-pin
Input type	PNP
Type of input diagnostics	Channel diagnostics
Switching threshold	EN 61131-2 Typ 3, PNP
Low level signal voltage	< 5 V
High level signal voltage	> 11 V
Low level signal current	< 1.5 mA
High level signal current	> 2 mA
Input delay	0.05 ms
Electrical isolation	Galvanically isolated to the fieldbus Voltage proof up 500 VDC

Digital outputs

Number of channels	4
Connectivity outputs	M12, 5-pol
Output type	PNP
Type of output diagnostics	Channel diagnostics
Output voltage	24V DC from potential group V2
Output current per channel	0.5 A, short-circuit proof
Simultaneity factor	1 (0.03 >55°C)
Load type	EN 60947-5-1: DC-13
Short-circuit protection	yes
Electrical isolation	Galvanically isolated to the fieldbus Voltage proof up 500 VDC

Standard/Directive conformity


Vibration test	acceleration to 20 g acc. to EN 60068-2-6
Shock test	acc. to EN 60068-2-27
Drop and topple	acc. to EN 60068-2-31/IEC 60068-2-32
Electromagnetic compatibility	acc. to EN 61131-2
Approvals and certificates	CE, FCC, UV-resistant in accordance with DIN EN ISO 4892-2A (2013)
UL Certificate	cULus LISTED 21 W2, Encl.Type 1 IND.CONT.EQ.

Compact Multiprotocol RFID Module for Ethernet interface for 2 BL ident read-write heads (HF/UHF) TBEN-S2-2RFID-4DXP

General Information

Dimensions (W x L x H)	32 x 144 x 32mm
Ambient temperature	-40...+70 °C
Storage temperature	-40...+85 °C
Altitude	max. 5000 m
Protection class	IP65 IP67 IP69K
MTTF	179 years acc. to SN 29500 (Ed. 99) 20 °C
Housing material	PA6-GF30
Housing color	Black
Material label	Polycarbonate
Halogen-free	yes
Mounting	2 mounting holes □ 4.6 mm

Compact Multiprotocol RFID Module for Ethernet interface for 2 BL ident read-write heads (HF/UHF) TBEN-S2-2RFID-4DXP



Accessories

Power supply cable (example):

M8-M8 2 M (2.0 Amp)

PKG 4M-2-PSG 4M



Ident. No. U99-10815

M8-M8 2 M (4.0 Amp)

PKGC 4M-2-PSGC 4M

Ident. No. U-82319

M8 x 1 Voltage Supply



Accessories

RFID cable (example):

RK4.5T-5-RS4.5T/S2500


ID number 6699201

Connection of TB and TN read/write heads (example):


TN-CK40-H1147

ID number 7030006


Connector .../S2500





Connector .../S2501



Connectors .../S2503



Wiring Diagram



Accessories

Actuator and sensor cable/PUR cable (example):

RKC4.4T-2-RSC4.4T/TXL



Ident. no. 6625608

Connection cable with Y piece for single assignment


VBRS4.4-2RKC4T-1/1/TXL

Ident-No. 6628112

M12 x 1 I/O Port



Compact Multiprotocol RFID Module for Ethernet
interface for 2 BL ident read-write heads (HF/UHF)
TBEN-S2-2RFID-4DXP



Accessories
It is strongly recommended to use only ready-made Ethernet cables!
Ethernet cable (example):
M8-M8:
PSGS4M-PSGS4M-4413-1M
Ident. no. U-55718
M8-RJ45:
PSGS4M-RJ45S-4413-1M
Ident. no.: U-55725
M8-M12:
RSSD-PSGS4M-4413-1M
Ident. no.: U-58840

