





MODEL 2 - DOUBLE REDUCTION

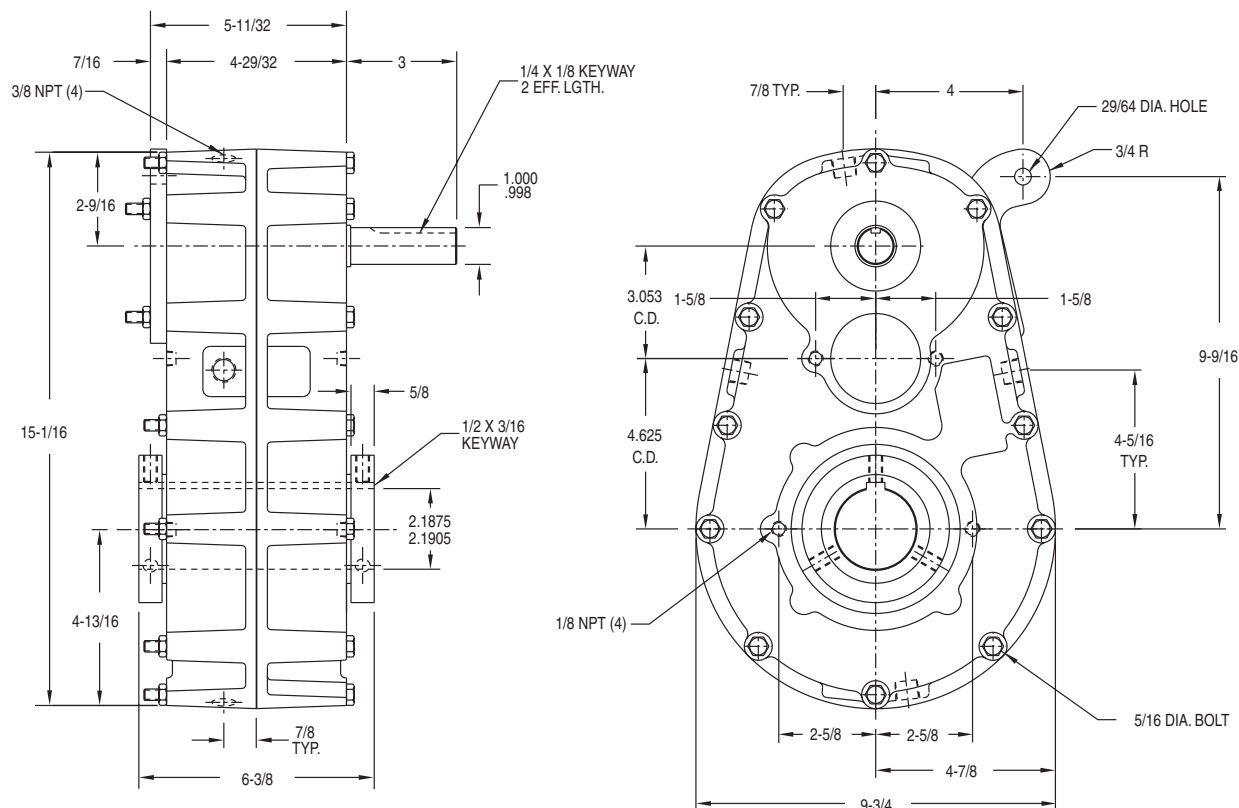

DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.
CERTIFIED PRINTS ARE AVAILABLE UPON REQUEST.

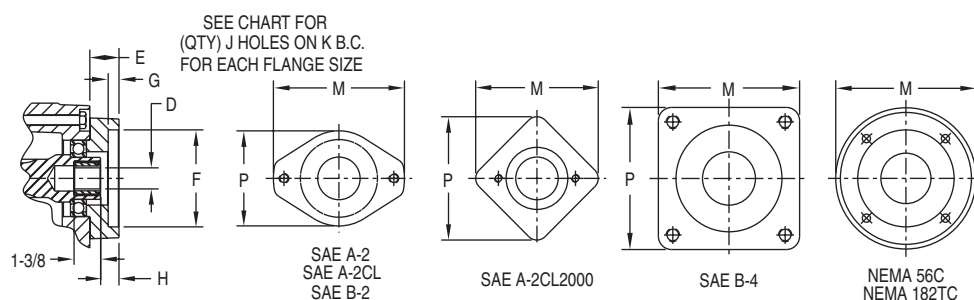

SHAFT MOUNTED UNITS
REQUIRE TORQUE ARMS.
TORQUE ARM KITS ARE
AVAILABLE SEE PAGE F-53.

ADDITIONAL RATIOS,
OUTPUT BORES AND INPUT
BORES ARE AVAILABLE —
CONSULT FACTORY.

**FOR LUBRICATION AND INSTALLATION
INSTRUCTIONS - REFER TO SECTION R**

DRY SHIPPING WEIGHT 80 LBS.

OPTIONAL LOW SPEED BORE SIZES AVAILABLE

1", 1-1/4, 1-1/2, 1-3/4, 1-15/16, 2"

INPUT BUSHING SIZES

D

.625 DIA. - 3/16 X 3/32 KW	1.125 DIA. - 1/4 X 1/8 KW	1" - 6B SPLINE	14T - 12/24 D.P. SPLINE
.875 DIA. - 3/16 X 3/32 KW	1.250 DIA. - 1/4 X 1/8 KW	9T - 16/32 D.P. SPLINE	15T - 16/32 D.P. SPLINE
1.000 DIA. - 1/4 X 1/8 KW	1.250 DIA. - 5/16 X 1/8 KW	13T - 16/32 D.P. SPLINE	21T - 16/32 D.P. SPLINE

FLANGE	E	COUNTERBORE F	G	H	(QTY) J HOLES	B.C. DIA. K	M	P
A-2	1-7/16	3.251 / 3.253	5/16	7/16	(2) 3/8 NC	4-3/16	5-1/8	4-1/16
A-2CL	1-7/16	3.251 / 3.253	3/16	7/16	(2) 1/2 NC	4-3/16	5-1/8	4-1/16
A-2CL2000	1-13/16	3.251 / 3.253	13/32	51/64	(2) 1/2 NC	4-3/16	5-1/2	5-1/2
B-2	1-7/16	4.001 / 4.003	7/16	7/16	(2) 1/2 NC	5-3/4	6-7/8	5-1/4
B-4	1-7/16	4.001 / 4.003	7/16	7/16	(4) 1/2 NC	5	5-1/8	5-1/8
56C	1-5/8	4.502 / 4.504	5/16	5/8	(4) 13/32 DIA.	5-7/8	6-9/16	--
182TC	2-7/16	8.502 / 8.505	5/16	1-7/16	(4) 17/32 DIA.	7-1/4	9-1/8	--

CALL: (605) 225-0360 • FAX: (605) 225-0567

F-37

DOUBLE REDUCTION

F