


LF (70/455 kHz)
BIS C-131-05/L
Order Code: BIS001Y

BALLUFF



1) Sensing surface, 2) Clear zone

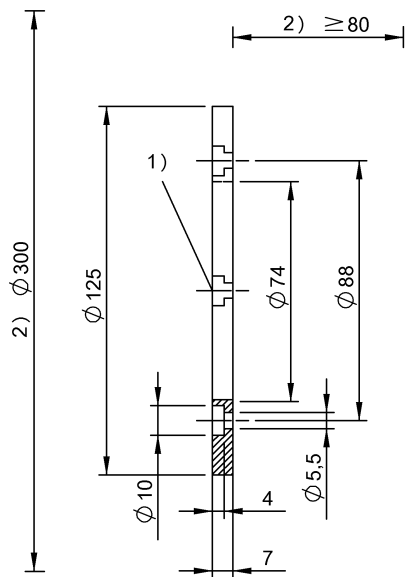

UL US LISTED
PROCESS CONTROL
EQUIPMENT E227256

Electrical data


Memory organization	32 × 8 bits
Programming cycles	up to 30 °C: 1,000,000 up to 70 °C: 500,000
Programming time	for 1x8 bits: 0.3s for 32x8 bits: 0.6s
Read cycles	Unlimited
Read time	for 32x8 bits: 0.19 s

Environmental conditions

Ambient temperature	-30...70 °C
Continuous shock load	yes
EN 60068-2-27, Shock	yes
EN 60068-2-32 Free fall	yes
EN 60068-2-6, Vibration	yes
IP rating	IP67
Storage temperature	-30...85 °C

Functional Characteristics

Memory type	EEPROM
User data, read/write	1023 Byte

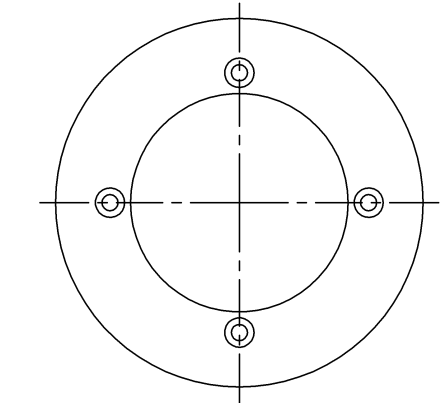

Functional safety

MTTF (40 °C)	740 a
--------------	-------

General data

Antenna type	round
Approval/Conformity	CE cULus WEEE
EN 55011	Size 1, Cl. A

Material

Housing material	POM
------------------	-----

Mechanical data

Application weight	80.00 g
Dimension	Ø 125 x 7 mm
Installation	metal-free (clear zone)

Remarks

For installation in metal: Observe clear zone.

On the last page only 31x8 bits are usable.

Time specification includes data check.

For installation requirements see corresponding read/write head.

Values are under rated conditions unless otherwise specified.

Only together with converter BIS C-901 or BIS C-6xx and the appropriate read/write head.

For further information about the MTTF and B10d see MTTF / B10d certificate

Indication of the MTTF- / B10d value does not represent a binding composition and/or life expectancy assurance; these are simply experiential values with no warranty implications. These declared values also do not extend the expiration period for defect claims or affect it in any way.