

# DATA SHEET



## USB-C Travel Dock with Hub

Connect a USB-C device to a display while connecting to two USB devices and wired Ethernet

### OVERVIEW

The USB-C Travel Dock with Hub is the perfect solution for connecting a USB-C computer to an HDMI, DisplayPort, or VGA display when in the office or on the go. Supporting HDMI and DisplayPort resolutions up to 4K at 60Hz--while also providing Gigabit Ethernet--enables the USB-C Travel Dock with Hub to meet your connectivity needs and handle critical tasks so that you can rest easy knowing that you have the connection you need. The included USB-C Hub has 2 USB-A ports and a RJ45 Gigabit Ethernet port. Simply connect the hub to the travel dock to ensure you're prepared for the big presentation.

The Travel Dock is a great means to connect to nearly any display for that big meeting or presentation. The Dock is purposefully engineered to allow a USB-C enabled computer or tablet to connect to a display with HDMI, VGA, or DisplayPort inputs and features a USB Type-C port with power delivery.

The USB-C Connectivity Hub brings additional connections to the Travel Dock to meet all connectivity needs. The Hub is equipped with a USB-C port for plugging in mobile devices, two USB-A ports for connecting peripherals or portable storage, and an RJ-45 port for Gigabit Ethernet. Connect a USB-C power source to the Travel Dock to provide the necessary power for the Hub to function.

### FEATURES

- Tethered USB-C Male cable for easy connection
- USB-C capability—a reversible, high-power connection
- Maximum VGA resolution: 2048x1536
- HDMI and DisplayPort support up to 4K60
- Gigabit Ethernet

### ITEM DESCRIPTION

34062      USB-C Travel Dock with Hub

# DATA SHEET










## SPECIFICATIONS: USB-C Travel Dock with Hub

### PHYSICAL SPECIFICATIONS

- Operating Temperature: 0°C to 40°C (RH = 15~85%)
- Storage Temperature: 0°C to 70°C (RH = 15~85%)

### PHYSICAL CHARACTERISTICS

- Travel Dock Dimensions (HxWxD): 5in x 2in x 1in (123.2mm x 51.4mm x 24.2mm)
- Travel Dock Weight: ~3.8 oz.
- Travel Dock Connectors: tethered USB-C male, rear USB-C female, VGA female, DisplayPort female, HDMI female, USB-C female
- Hub Dimensions (HxWxD): 5in x 1.75in x 1in (123.2mm x 45mm x 24.2mm)
- Hub Weight: ~3.5 oz.
- Hub Connectors: USB-C port, 2 USB-A female, Ethernet port, front USB-C male

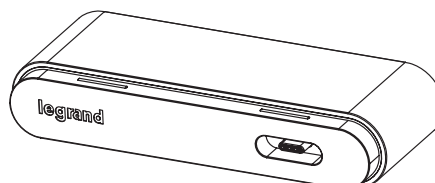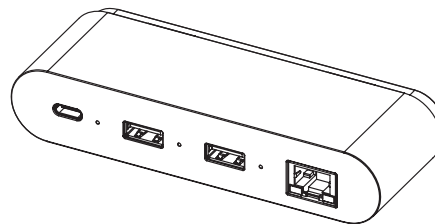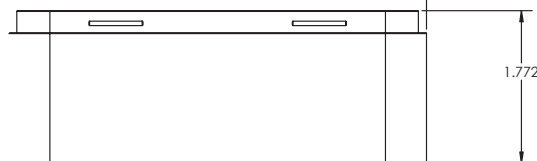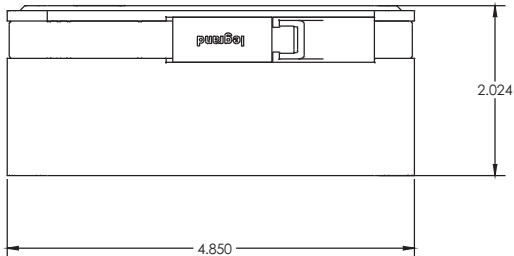

Legrand, North and Central America

60 Woodlawn Street  
West Hartford, CT 06110  
1.877.BY.LEGRAND (295.3472)  
[www.legrand.us](http://www.legrand.us)