


Cabinet Guard Internal Sensors IMX12-CCM02-MTI-1I2T-HC/L

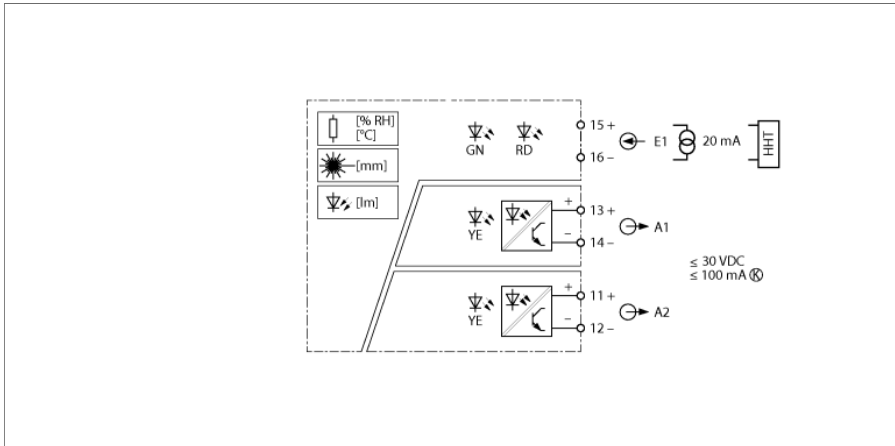

The cabinet guard IMX12-CCM02-MTI-1I2T-HC/L monitors preset environmental limits inside the control cabinet. The environmental conditions are detected by a humidity or temperature sensor, a brightness sensor and a triangulation sensor that detects an incorrectly closed cabinet door. When exceeding or falling below the set limit values an error message appears on the LED display or is reported via the switching outputs and the HART interface to the host control system.

The device is supplied loop powered from the 4...20 mA current interface. When used in Ex areas, the device can be supplied via the TURCK isolating transducer IMX12-AI01-....

The teaching is done manually on the device; extended parameterization is carried out via the HART interface.

The device is equipped with 8 screw terminals for connecting the HART® interface or power supply and switching outputs and can be mounted on a DIN rail acc. to EN 60715.

Furthermore, the device has 4 front-mounted LEDs to display the operating status (green), the error message (red) and the states of the switching outputs (2 x yellow). If an error occurs, a current of > 20.5 mA is output.


- Two potential-free contacts
- Temperature detection
- Moisture detection
- Detection of distance to cabinet door
- Galvanic isolation of outputs (A1/A2)
- Removable screw terminals
- ATEX, IECEx

Cabinet Guard

Internal Sensors

IMX12-CCM02-MTI-1I2T-HC/L

Dimensions



Type designation	IMX12-CCM02-MTI-1I2T-HC/L
Ident-No.	7570092
Nominal voltage	24 VDC loop-powered
Operating voltage range	10...28 VDC
Power consumption	≤ 0.32 W
Installed sensors CCM	Triangulation sensor 4...20 cm Humidity sensor 0...80% rel. hum. Brightness sensor Temperature sensor -25 °C...+60 °C
Reference temperature	23 °C
Output current	impressed 20 mA
Semiconductor output circuit(s)	
Output circuits (digital)	2 x transistor (potential-free) NO/NC
Switching voltage	≤ 30 VDC
Switching current per output	≤ 0.085 A at < 45 °C (T4) 0.100 A
Voltage drop	≤ 3.5 V
Moisture Sensor	
Accuracy max.	+/- 4.5 % RF in the range 10...90%
Repeat accuracy	0.2 % RF
Temperature Sensor	
Max. accuracy	+/- 1.5 °C
Repeat accuracy	0.16 °C
Distance Sensor	Information has been empirically determined, white target with matte finish
Beam angle	6 °
Measuring range	40...200 mm
Accuracy	+/-8 mm In the range of ≤ 200 mm
Max. temperature coefficient	+/-6 mm in the range of ≤ 200 mm
Max. linearity error	≤ 2 % of full scale
Important note	For Ex-applications the values specified in the corresponding Ex certificates (ATEX, IECEx, UL, etc.) apply.
Ex approval acc. to conformity certificate	IBEXU 16 ATEX 1005
Application area	II 2G
Ignition protection category	Ex ib op is IIC T4 Gb
Indication	
Operational readiness	green
Switching state	Yellow
Error indication	red

Cabinet Guard

Internal Sensors

IMX12-CCM02-MTI-1I2T-HC/L

Protection class	IP20																																																		
Flammability class acc. to UL 94	V-0																																																		
Ambient temperature	-25...+60 °C																																																		
Storage temperature	-25...+80 °C																																																		
Relative humidity	≤ 95 %																																																		
Dimensions	120 x 12.5 x 117 mm																																																		
Weight	135 g																																																		
Mounting instructions	DIN rail (NS35)																																																		
Housing material	Polycarbonate/ABS																																																		
Electrical connection	Removable screw clamp terminals, 2-pin																																																		
Terminal cross-section	0.2...2.5 mm ² (24 ... 13 AWG)																																																		
Tightening torque	0.5 Nm																																																		
Tightening torque	4.43 LBS-Inch																																																		
Environmental conditions	<table> <tr> <td>Operating altitude</td><td>Up to 2000 m above sea level</td></tr> <tr> <td>Pollution degree</td><td>II</td></tr> <tr> <td>Standards used</td><td></td></tr> <tr> <td>Voltage resistance and insulation</td><td></td></tr> <tr> <td></td><td>EN 50178</td></tr> <tr> <td></td><td>EN 61010-1</td></tr> <tr> <td>Shock</td><td></td></tr> <tr> <td></td><td>EN 60068-2-6</td></tr> <tr> <td></td><td>EN 60068-2-27</td></tr> <tr> <td>Temperature</td><td></td></tr> <tr> <td></td><td>EN 60068-2-1 Ad</td></tr> <tr> <td></td><td>EN 60068-2-2 Bd</td></tr> <tr> <td></td><td>EN 60068-2-1</td></tr> <tr> <td>Humidity</td><td></td></tr> <tr> <td></td><td>EN 60068-2-38</td></tr> <tr> <td>EMC</td><td></td></tr> <tr> <td></td><td>NE21</td></tr> <tr> <td></td><td>EN 61000-4-2</td></tr> <tr> <td></td><td>EN 61000-4-3</td></tr> <tr> <td></td><td>EN 61000-4-4</td></tr> <tr> <td></td><td>EN 61000-4-5</td></tr> <tr> <td></td><td>EN 61000-4-6</td></tr> <tr> <td></td><td>EN 61000-4-8</td></tr> <tr> <td>Emission</td><td></td></tr> <tr> <td></td><td>CISPR16</td></tr> </table>	Operating altitude	Up to 2000 m above sea level	Pollution degree	II	Standards used		Voltage resistance and insulation			EN 50178		EN 61010-1	Shock			EN 60068-2-6		EN 60068-2-27	Temperature			EN 60068-2-1 Ad		EN 60068-2-2 Bd		EN 60068-2-1	Humidity			EN 60068-2-38	EMC			NE21		EN 61000-4-2		EN 61000-4-3		EN 61000-4-4		EN 61000-4-5		EN 61000-4-6		EN 61000-4-8	Emission			CISPR16
Operating altitude	Up to 2000 m above sea level																																																		
Pollution degree	II																																																		
Standards used																																																			
Voltage resistance and insulation																																																			
	EN 50178																																																		
	EN 61010-1																																																		
Shock																																																			
	EN 60068-2-6																																																		
	EN 60068-2-27																																																		
Temperature																																																			
	EN 60068-2-1 Ad																																																		
	EN 60068-2-2 Bd																																																		
	EN 60068-2-1																																																		
Humidity																																																			
	EN 60068-2-38																																																		
EMC																																																			
	NE21																																																		
	EN 61000-4-2																																																		
	EN 61000-4-3																																																		
	EN 61000-4-4																																																		
	EN 61000-4-5																																																		
	EN 61000-4-6																																																		
	EN 61000-4-8																																																		
Emission																																																			
	CISPR16																																																		

Cabinet Guard
Internal Sensors
IMX12-CCM02-MTI-1I2T-HC/L**Accessories**

Type code	Ident-No.	Description	Dimension drawing
ISHRT USB	7570098	HRT-USB modem for parameterization of IMX12 CCM02 modules.	
IMX12-SC-2X-4BK	7580940	Screw terminals for IM(X)12 modules; included in delivery: 4 pcs. of 2-pin black terminals	
IMX12-SC-2X-4BU	7580941	Screw terminals for IM(X) 12 modules; included in delivery: 4 pcs. of 2-pin blue terminals	
IMX12-CC-2X-4BK	7580942	Spring terminals for IM(X)12 modules; included in delivery: 4 pcs. black terminals, 2-pin	
IMX12-CC-2X-4BU	7580943	Spring terminals for IM(X)12 modules; included in delivery: 4 pcs. blue terminals, 2-pin	