

Rittal – The System.

Faster – better – everywhere.

Cable gland HD – HD 2410.000

Date : Jan 19, 2017

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE


SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



Cable gland HD – HD 2410.000

created: 19.01.2017 build on www.rittal.com/us-en

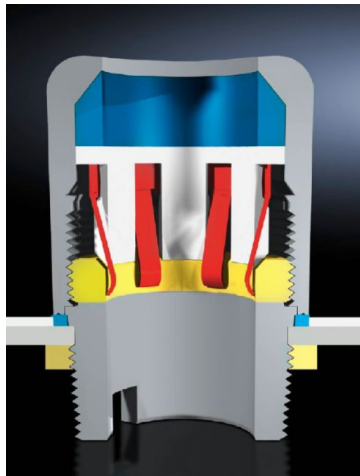

Product description

Benefits:	Smooth, solid exterior surfaces effectively prevent the accumulation of harmful micro-organisms. Much easier, and therefore cheaper to clean compared with conventional cable glands.
------------------	--

Applications:	Production and packaging of food and beverages Clean room technology (e.g. pharmaceuticals) Biotechnology Chemical industry
----------------------	--

Material:	Cap nut: Stainless steel 1.4305 (AISI 303) Seal: Conforms to FDA 21 CFR 177.2600
------------------	---

Protection category IP to IEC 60 529:	IP 68 (5 bar, 30 min.)
--	------------------------

Protection category IP to DIN 40 050-9:	IP 69K
--	--------

Product features

Version:	Standard
-----------------	----------

Ambient temperature range:	-20°C...+100°C
---------------------------------------	----------------

Thread:	M12 x 1.5
----------------	-----------

Operating temperature (max.):	100 °C (212 °F)
--	-----------------

Cable entry:	For cable diameter: 3 mm - 6,5 mm
---------------------	-----------------------------------

Packaging unit:	5 pc(s).
Weight/packaging unit:	0.12 kg (0.3 lb.)
EAN:	4028177022447
Customs tariff number:	73181900
ETIM 6.0:	EC000441
ETIM 5.0:	EC000441
eCl@ss 8.0/8.1:	27149109
eCl@ss 7.0/7.1:	27189265
eCl@ss 6.0/6.1:	27189265
eCl@ss 5.1/5.1.4:	27180102
Approvals	
Certificates:	DGUV EAC
Declarations:	Manufacturer's declaration