

VSP MOV Protector Fuse

Metal Oxide Varistor

SURGE PROTECTIVE DEVICE

COMPONENT SPD FOR OEM DESIGN AND BUILD



Mersen surge suppression fuses are specially designed to address the protection of SPD systems. Our surge suppression fuses have been specially designed to withstand 8/20 μ Sec surge pulses without opening, allowing the SPD system to react to the surge. All surge suppression fuses have a 8/20 μ Sec surge rating, not a continuous current rating. Under AC short circuit conditions these surge suppression fuses are very current limiting.

FEATURES AND BENEFITS:

- VSP fuses rated 600VAC, 200kA I.R.
- Surge ratings of 5-100kA 8/20 μ Sec capacity
- Various mounting configurations ferrules, blade, bolt-in, PC board mount








RATINGS:

- **Volts:** 600VAC
- **Surge Rating:** 5-100kA
8/20 μ Sec
- **Interrupting Rating (IR):**
200kA

APPROVALS:

- ANSI/UL 248 Special Purpose MOV Fuse, File E60314

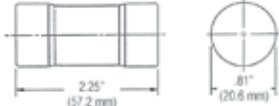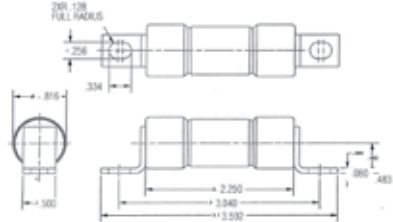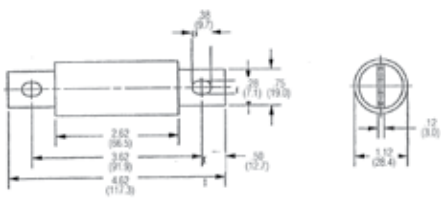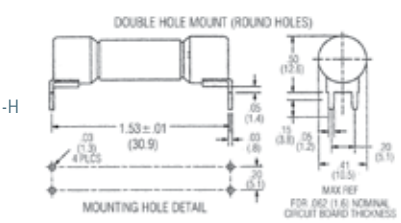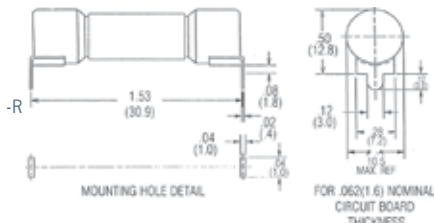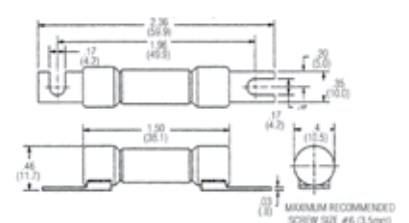

PRODUCT PERFORMANCE DATA						VSP [5-20]-2,R,H,S
Catalog No. [Connection suffix]	Voltage Rating [AC]	8x20 μSEC Surge Rating	Melting i ² t [A2S]	Clearing i ² t [A2S]	I _{PEAK} @ 100kA 60 Hz [A]	
VSP5-2,-R,-H,-S	600V	5,000	341	936	3,652	
VSP10-2,-R,-H,-S	600V	10,000	1,541	3,744	5,794	
VSP15-2,-R,-H,-S	600V	15,000	3,072	8,424	7,591	
VSP20-2,-R,-H,-S	600V	20,000	4,992	14,400	9,194	
VSP30,-2	600V	30,000	12,507	33,696	12,044	
VSP40,-2	600V	40,000	19,543	59,904	14,588	
VSP50,-2	600V	50,000	32,020	93,600	16,925	
VSP60,-2	600V	60,000	42,808	134,784	19,110	
VSP70,-2	600V	70,000	61,152	183,456	21,176	
VSP80,-2	600V	80,000	79,872	239,616	23,146	
VSP90,-2	600V	90,000	99,000	303,264	25,034	
VSP100,-2	480V	100,000	121,500	374,400	26,854	
VSP100-XL	600V	100,000	121,500	374,400	26,854	
RECOMMENDED FUSE BLOCKS FOR VSP FUSES						VSP [30-100]-2
VSP[5-20]-2						
Number of Poles	Screw with Double Quick Connects	Pressure Plate with Double Quick Connects	Copper Box Connector			
ADDER	30310	30320	30350			
1	30311	30321	30351			
2	30312	30322	30352			
3	30313	30323	30353			
VSP[30-100]-2						VSP30-100
Number of Poles	Catalog Number					
ADDER	60305J	60315J	60325J			
1	60306J	60316J	60326J			
2	60307J	60317J	60327J			
3	60308J	60318J	60328J			
MOUNTING OPTIONS						VSP100-XL
DOUBLE HOLE MOUNT (ROUND HOLES)		PC BOARD MOUNTING		SURFACE SCREW MOUNT		
						
<p>MOUNTING HOLE DETAIL</p> <p>MAX REF FOR .062 (1.6) NOMINAL CIRCUIT BOARD THICKNESS</p>		<p>MOUNTING HOLE DETAIL</p> <p>FOR .062 (1.6) NOMINAL CIRCUIT BOARD THICKNESS</p>		<p>MOUNTING HOLE DETAIL</p> <p>MINIMUM RECOMMENDED SCREW SIZE #6 (3.5mm)</p>		