


Sockets for RPY Relays

ZPY08C




ZPY08C

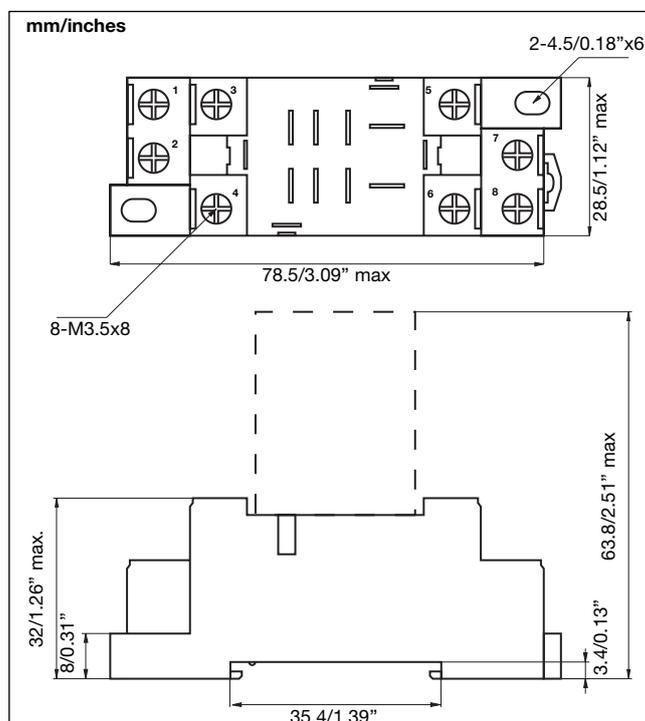


General data

Rated voltage	300VAC
Rated current	16A
Insulation voltage	>3kV
Socket material	PA66 + GF (V0)
Socket colour	Black
Contact material	Nickel Plated - CuSn
Terminal type	Screw cage
Screw type	M3 with combi head (slotted, Philips Gr.1, Pozi)
Max. screw torque	1.0N/m
Max wire section	0.5-2.5mm ² (20AWG 14AWG)
Operating temperature	-25° to +85°C (-13° to +185°F)

Drilling pattern

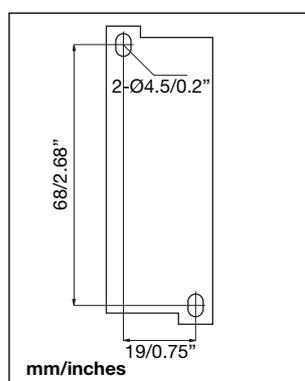

Wiring diagram

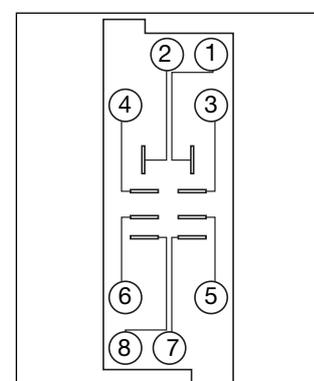

Approvals




Box content: 10 sockets
 Box size: (W 160 x D 70 x H 80) mm Weight: 580g
 (W 6.30 x D 2.75 x H 3.15) inches Weight: 20.46oz

Optional Accessories (to be ordered separately if required)

Hold-down spring steel SZPY 35M

Optional Springs for ZPY series

SZPY 35M

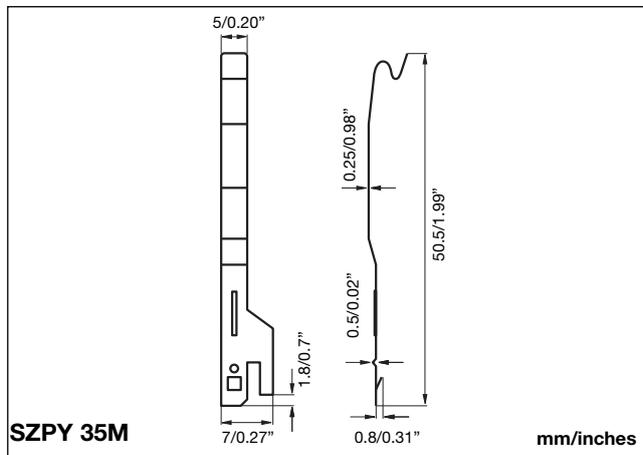

General data

Spring material

Stainless steel

Packaging

Box content:

1 plastic bag, 10pcs.

Weight:

~10g (0.36oz)

Note:

For each relay/socket are required at least 2 springs.

Up to 4 springs can be mounted.

RoHS
COMPLIANT