


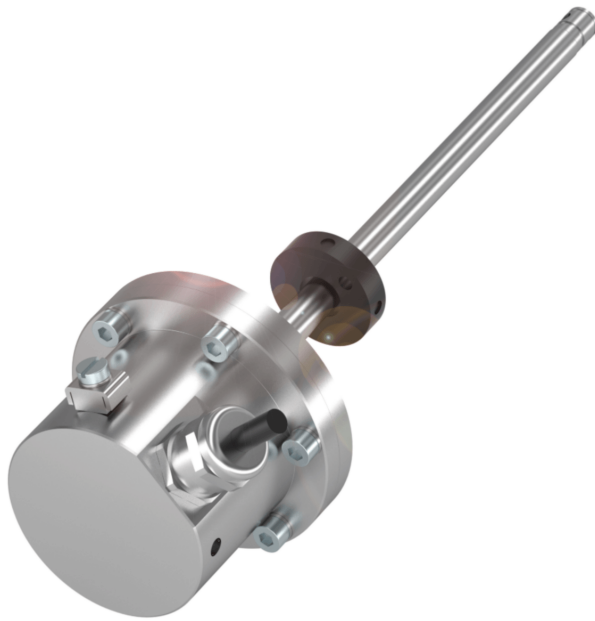

BTL5-abcde-Mnnnn-fg-ij-lm

BTL5

Magnetostrictive linear position sensor Generation 5

a interface

S = SSI

b Operating voltage

1 = 20 ... 26 V

c Interface characteristic 1

0 = 24 bits, binary, rising
1 = 24 bits, gray, rising
2 = 24 bits, binary, falling
3 = 24 bits, gray, falling
6 = 25 bits, binary, rising
7 = 25 bits, gray, rising
8 = 25 bits, binary, falling
9 = 25 bits, gray, falling

d Interface characteristic 2

1 = 1 μm
2 = 5 μm
3 = 10 μm
4 = 20 μm
5 = 40 μm
6 = 100 μm
7 = 2 μm
8 = 50 μm

e Interface characteristic 3

B = Synchronous mode
- = Asynchronous mode

Mnnnn Nominal length (4-position)

M0500 = metric in mm
(M0050...M4000)

f Style

B = Mounting threads M18x1.5, for O-Ring

g Form factor characteristic

- = Rod diameter 10.2 mm

i Variant

DEX = Ignition protection category "d" / pressure-proof encapsulation

j Variant characteristic

A = float plug
B = short plug

l Connection type

K = Cable out radial (PUR)
KA = Cable out axial (PUR)

m Connection type characteristic 1

(length in meters)
02, 05, 10, 15, 20, 30

Display/Operation

Error value	d = 1: all bits = 0 d = 7: all bits = 0 otherwise: only bits 2 ²¹ = 1
-------------	--

Electrical connection

Polarity reversal protected	Ub up to 28 V
-----------------------------	---------------

Electrical data

Current consumption max. at 24 V DC	90 mA
Inrush current	≤ 3 A/0.5 ms
Operating voltage Ub	20...26 VDC
Output signal adjustable	no
Overvoltage protection	Ub up to 28 V
Voltage-proof up to (GND to housing)	500 V DC

Environmental conditions

Ambient temperature	-40...60 °C
Cable temperature, fixed routing	I = K, KA: -40 °C ... 90 °C
Cable temperature, flexible routing	I = K, KA: -5 °C ... 90 °C
EN 55016-2-3, Radiation	Industrial areas
EN 60068-2-27, Continuous shock	100 g, 2 ms
EN 60068-2-27, Shock	100 g, 6 ms
EN 60068-2-6, Vibration	12 g, 10...2000 Hz
EN 61000-4-2, ESD	Severity Level 3
EN 61000-4-3, RFI	Severity Level 3
EN 61000-4-4, Burst	Severity Level 3
EN 61000-4-5, Surge	Severity Level 2
EN 61000-4-6, High-frequency fields	Severity Level 3
EN 61000-4-8 Magnetic fields	Severity Level 4
IP rating	IP67
Relative humidity	≤ 90 %, non-condensing
Storage temperature	-40...100 °C
Temperature coefficient typ.	≤ 35 ppm/K at 50% of nominal stroke 500mm

Functional safety

MTTF (40 °C)	63 a
--------------	------

General data

Approval/Conformity	CE EAC IECEX KC PESO WEEE
Ex marking	ATEX: II 1/2 G Ex db IIB + H2 T6 Ga/Gb -40 °C < Ta < +60 °C EAC: 1 Ex d IIB+H2 T6 Ga/Gb X Ex ta IIIC T 85 °C Da X -40 °C < Ta < +60 °C IECEX: Ex d IIB + H2 T6 Ga/Gb -40 °C < Ta < +60 °C KC: Ex d IIB + H2 T6 PESO: Ex d IIB + H2 T6 Ga/Gb
Magnets, number (factory setting)	1
Magnets, number max.	1

Material

Cable flame-resistant	I = K, KA: IEC 60332-1
Cable jacket, material	I = K, KA: PUR
Cover material	Stainless steel (1.4301) Stainless steel (1.4305) Stainless steel (1.4571)
Protection tube material	Stainless steel (1.4571)

Mechanical data

Installation length from contact surface	j = A: nnnn + 99 mm j = B: nnnn + 94 mm
Pressure rating max.	350 bar
Pressure rating, note	when installed in hydraulic cylinder
Speed detectable max.	10 m/s
Tightening torque max.	50 Nm


Output/Interface

Interface	SSI
-----------	-----

Range/Distance

Linearity deviation	d = 1, 2, 3, 7: nnnn = 25...4000: ± 30µm d = 4, 5, 6, 8 nnnn = 25...4000: ± 2 LSB
Measuring length	25...4000 mm
Repeat accuracy	± 1 LSB
Sampling frequency max.	See illustration for measuring frequency


Characteristic Diagram

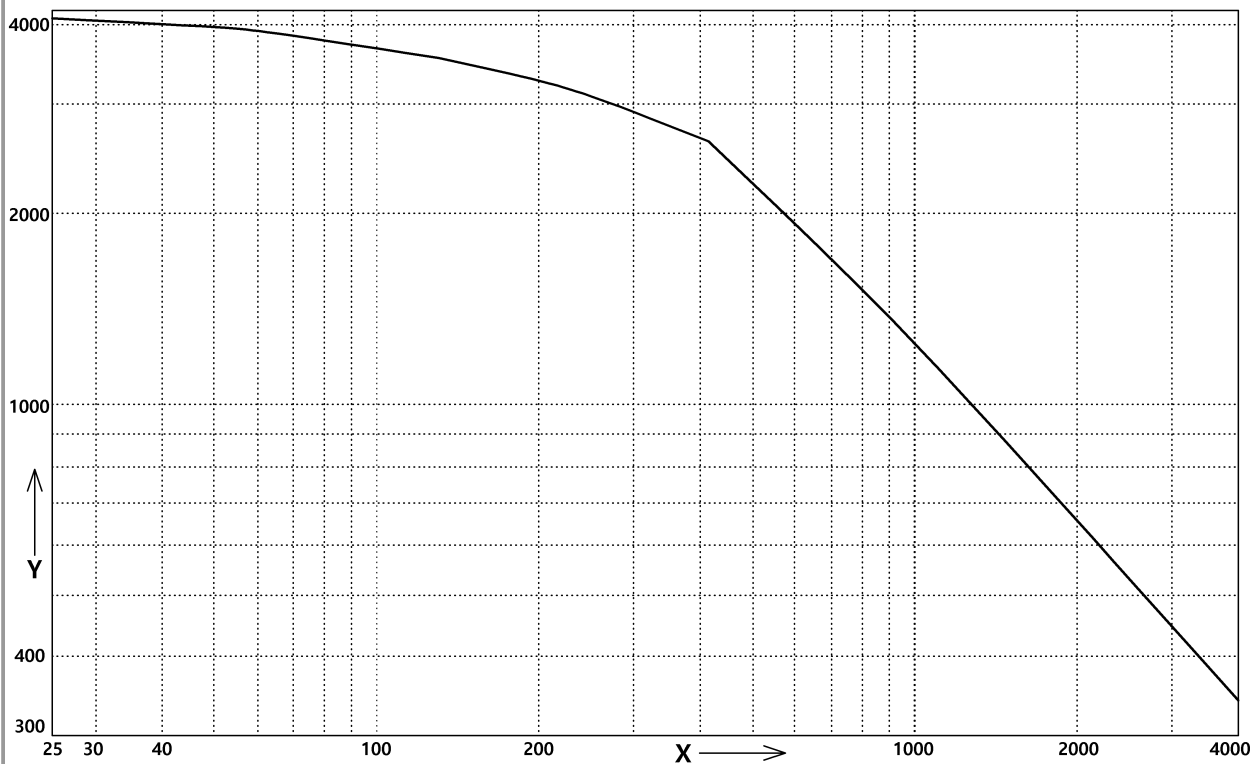

x: Nominal length [mm]

y: fA,max Hz


BTL5-Sxxxx-Mxxxx-B-DEXB-Kxx

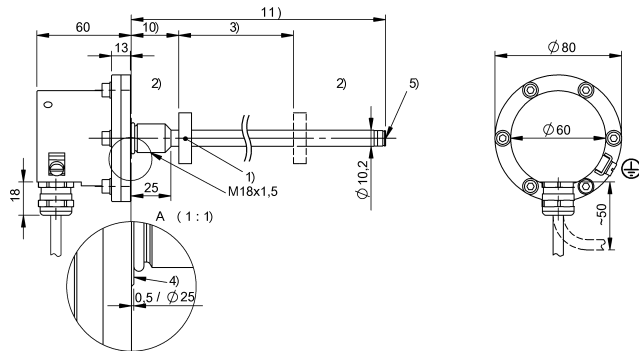

colour	
YE	+Clk
GY	+Data
PK	-Clk
GN	-Data
BU	GND
BN	+24 V DC
WH	NC

- 1) not included in scope of delivery
- 2) Non-usable area
- 3) Nominal length = Measuring length
- 4) Mounting surface
- 5) Internal threads M4x4/6 deep
- 10) Null point
- 11) Installation length

BTL5-Sxxxx-Mxxxx-B-DEXA-KAxx

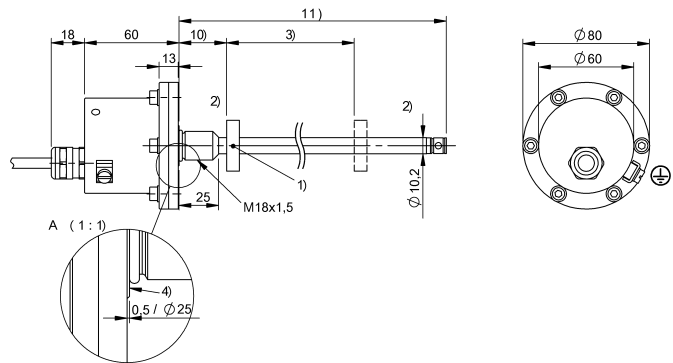

colour	
YE	+Clk
GY	+Data
PK	-Clk
GN	-Data
BU	GND
BN	+24 V DC
WH	NC

- 1) not included in scope of delivery
- 2) Non-usable area
- 3) Nominal length = Measuring length
- 4) Mounting surface
- 10) Null point
- 11) Installation length