

USB Charger Outlets



Features

- Compact depth for use in raceway, delivery systems and where space is limited
- 2 stainless steel ports rated for 10,000 insertions and removals
- Switch activated port door; when open enables power; when closed, all power is switched off, for a “zero” no-load draw
- Bidirectional clamp wiring allows horizontal or back entry of solid or stranded wire
- Compatible with USB 1.1/2.0/3.0 devices, including Apple® products

Ordering Information

Description	Device Color	UPC	Catalog Number
USB charger 2 port outlet, type A 2.0 ports, 3 Amp, 5 Volt DC, Style Line® decorator	Ivory	883778305207	USB2I

Listings


cULus to UL 1310

Specifications

Face	Thermoplastic
Base	Reinforced Thermoplastic
LED	Green Indicator
Mounting Strap	Galvanized steel
Auto Self-grounding staple	Stainless steel
Mounting Screws	Zinc plated steel
Terminal Screws	Plated Steel #8
USB Port	Stainless Steel

Performance

Electrical	
Dielectric Voltage	Withstands 1,500V minimum
Feed-Through	Circuit feed-through 20 Amp, 125 Volt
Rating	3A, 5V DC
Mechanical	
Product Identification	Ratings are a permanent part of the device
Terminal Accommodation	#14-#10 AWG copper stranded or solid conductor only
Terminal Identification	Terminals identified in accordance with UL 498 and CSA
USB Port	Stainless steel Rated for 10,000 plug insertions and removal
Environmental	
Flammability	UL 5VA
Operating Temperature	Maximum continuous 75°C; minimum -40°C (w/o impact)

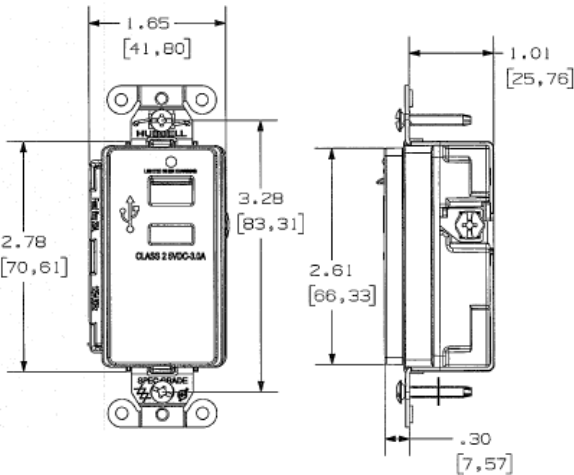

Online Resources

[eCatalog](#)

Dimensions in Inches (mm)

Hubbell Wiring Device-Kellems • Hubbell Incorporated (Delaware) • 40 Waterview Drive • Shelton, CT 06484

Phone (800) 288-6000 • Fax (800) 255-1031 • Specifications subject to change without notice.

