

## Han D 15 Pos. F Insert Wire Wrap

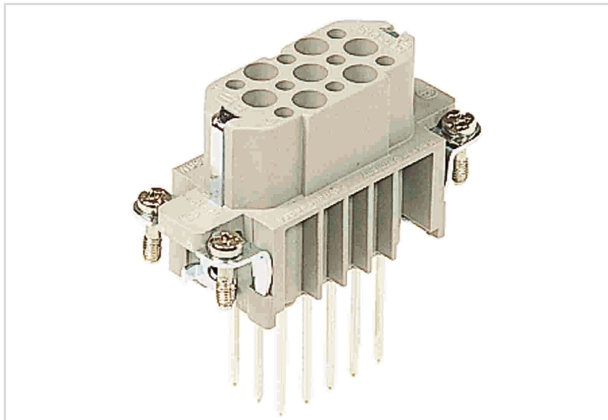


Image is for illustration purposes only. Please refer to product description.

Part number	09 21 015 2701
Specification	Han D 15 Pos. F Insert Wire Wrap
HARTING eCatalogue	<a href="https://b2b.harting.com/09210152701">https://b2b.harting.com/09210152701</a>

### Identification

Category	Inserts
Series	Han D <sup>®</sup>

### Version

Termination method	Wrap termination
Gender	Female
Size	10 A
Number of contacts	15
PE contact	Yes
Termination length	22 mm

### Technical characteristics

Dimensions wire wrap post	1 x 1 mm
Rated current	10 A
Rated voltage	250 V
Rated impulse voltage	4 kV
Pollution degree	3
Rated voltage acc. to UL	600 V
Rated voltage acc. to CSA	600 V
Insulation resistance	$>10^{10} \Omega$
Contact resistance	$\leq 3 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C



Pushing Performance

## Technical characteristics

Mating cycles	≥500
---------------	------

## Material properties

Material (insert)	Polycarbonate (PC)
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Surface (contacts)	Silver plated
Material flammability class acc. to UL 94	V-0
RoHS	compliant with exemption
RoHS exemptions	6(c): Copper alloy containing up to 4 % lead by weight
ELV status	compliant with exemption
China RoHS	50
REACH Annex XVII substances	No
REACH ANNEX XIV substances	No
REACH SVHC substances	Yes
REACH SVHC substances	Lead

## Specifications and approvals

Specifications	EN 60664-1 IEC 61984 EN 175301-801
Approvals	DNV GL
UL / CSA	UL 1977 ECBT2.E235076 CSA-C22.2 No. 182.3 ECBT8.E235076

## Commercial data

Packaging size	12
Net weight	47.42 g
Country of origin	Romania
European customs tariff number	85366990
eCI@ss	27440205 Contact insert for industrial connectors