



Pass & Seymour


Tamper-Resistant Receptacles PlugTail™ Devices Spec Grade 15 & 20A, 125V

PTTR5262, PTTR5362, PTTR26262, PTTR26362,
PTTR5262SC, PTTR5362SC, PTTR26262SC, PTTR26362SC

**PlugTail™. The fastest,
most consistent and reliable
wiring devices – ever.**

Factory-terminated devices and connectors mean that device installation is the same regardless of skill level of the installer. The UL-Listed connectors are keyed to ensure proper wiring installation into each receptacle. The connector simply snaps into the back of the device – no fussing with wires, stripping, or tightening screws. PlugTail devices are finger safe with no exposed terminals, so taping is not required. Now device installation is a snap!

A sturdy mechanical shutter system helps prevent children from sticking objects into the receptacle. The toughest and safest tamper-resistant receptacle available. They are offered in both duplex and Decorator style, in addition to split circuit versions.

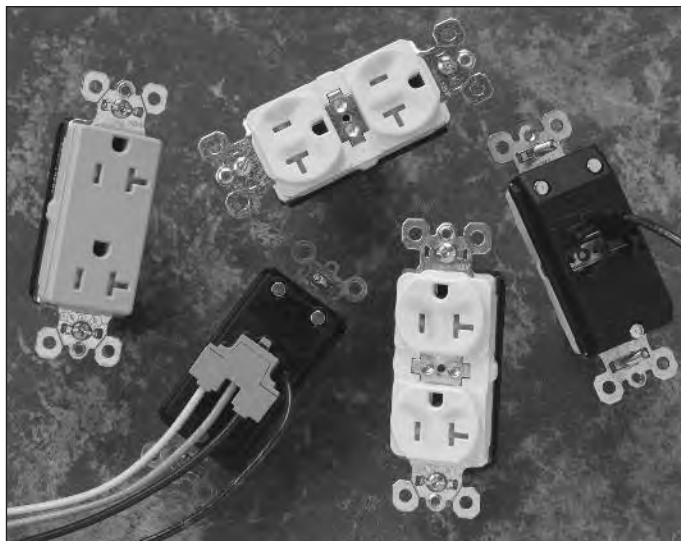

FEATURES & BENEFITS

Auto-ground clip
assures positive ground.


Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections.

Large brass contacts snugly terminate on device blade terminals. Audible snapping latch assures connection, allows release.

.036 inch thick, brass, triple-wipe power contacts
for lasting retention.

Dual mechanical shutter system to help prevent insertion of foreign objects.


Plated steel wrap strap design for maximum durability and corrosion resistance.

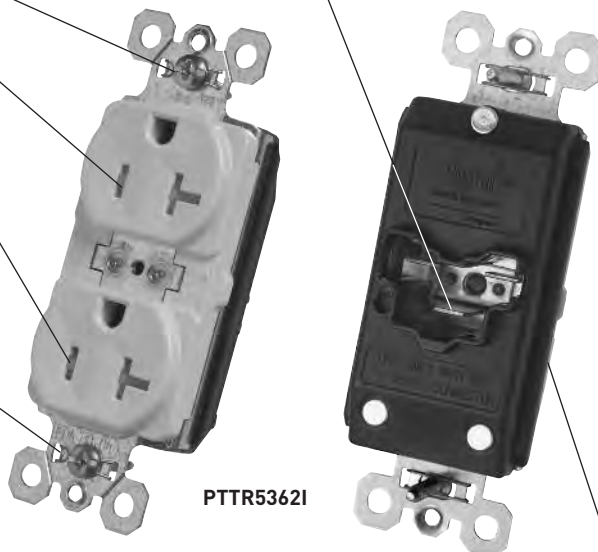

PTTR5362I

Ultrasonically welded polycarbonate connector housing secures terminations and conductors in a UL Listed, finger safe housing.

Pre-stripped connector leads fasten to conductors, easier than standard pigtails.

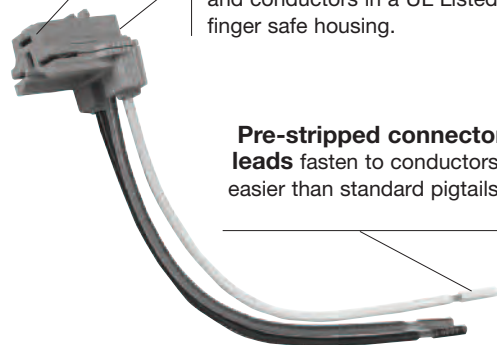

Split circuit versions are pre-wired with one welded pre-stripped wire lead to facilitate switched receptacle circuit applications.

No exposed terminals create a finger safe application before, during, and after installation.

FIELD USES/VERTICAL MARKETS

- | | | |
|-----------------|---------------------|-----------------------|
| ■ Office/Retail | ■ Institutional | ■ Hospitality/Lodging |
| ■ Entertainment | ■ Multiple Dwelling | ■ Education |


Tamper-Resistant Receptacles PlugTail™ Devices Spec Grade 15 & 20A, 125V

ORDERING INFORMATION

Catalog Number	Rating A. V.	Color	NEMA Config. No.
Duplex Receptacles			
PTTR5262I	15 125	Ivory	5-15R
PTTR5262W	15 125	White	5-15R
PTTR5262	15 125	Brown	5-15R
PTTR5262BK	15 125	Black	5-15R
PTTR5262LA	15 125	Light Almond	5-15R
PTTR5362I	20 125	Ivory	5-20R
PTTR5362W	20 125	White	5-20R
PTTR5362	20 125	Brown	5-20R
PTTR5362BK	20 125	Black	5-20R
PTTR5362LA	20 125	Light Almond	5-20R
Split Circuit Duplex Receptacles with 6" Lead			
PTTR5262SCI	15 125	Ivory	5-15R
PTTR5262SCW	15 125	White	5-15R
PTTR5262SC	15 125	Brown	5-15R
PTTR5262SCBK	15 125	Black	5-15R
PTTR5262SCLA	15 125	Light Almond	5-15R
PTTR5362SCI	20 125	Ivory	5-20R
PTTR5362SCW	20 125	White	5-20R
PTTR5362SC	20 125	Brown	5-20R
PTTR5362SCBK	20 125	Black	5-20R
PTTR5362SCLA	20 125	Light Almond	5-20R

Catalog Number	Rating A. V.	Color	NEMA Config. No.
Decorator Receptacles			
PTTR26262I	15 125	Ivory	5-15R
PTTR26262W	15 125	White	5-15R
PTTR26262	15 125	Brown	5-15R
PTTR26262BK	15 125	Black	5-15R
PTTR26262LA	15 125	Light Almond	5-15R
PTTR26362I	20 125	Ivory	5-20R
PTTR26362W	20 125	White	5-20R
PTTR26362	20 125	Brown	5-20R
PTTR26362BK	20 125	Black	5-20R
PTTR26362LA	20 125	Light Almond	5-20R
Split Circuit Decorator Receptacles with 6" Lead			
PTTR26262SCI	15 125	Ivory	5-15R
PTTR26262SCW	15 125	White	5-15R
PTTR26262SC	15 125	Brown	5-15R
PTTR26262SCBK	15 125	Black	5-15R
PTTR26262SCLA	15 125	Light Almond	5-15R
PTTR26362SCI	20 125	Ivory	5-20R
PTTR26362SCW	20 125	White	5-20R
PTTR26362SC	20 125	Brown	5-20R
PTTR26362SCBK	20 125	Black	5-20R
PTTR26362SCLA	20 125	Light Almond	5-20R

Catalog Number	Wire Type	Wire Length
PlugTail Connectors – Right Angle		
PTRA6SOL	Solid	6"
PTRA6STR	Stranded	6"
PTRA6SOLB25	Solid	25"
PTRA6STRB25	Stranded	25"
PlugTail Connectors – Right Angle with WAGO Connectors		
PTRA6SOLBP	Solid	6"
PTRA6STRBP	Stranded	6"
PlugTail Connectors – Right Angle with Ground Screw		
PTRA6SOLG	Solid	6"
PTRA6STRG	Stranded	6"



For more information on these and other P&S products refer to our Catalog or visit our web site.

Tamper-Resistant Receptacles PlugTail™ Devices Spec Grade 15 & 20A, 125V



TECHNICAL SPECIFICATIONS

3rd Party Compliance

cULus Listed, File Number E140596, Standard UL498.
Federal Specification WC596.
Conforms to NEMA WD-1 and WD-6.

Performance

Electrical

Dielectric Voltage	Withstands 2000V minimum
Maximum Working Voltage	125V
Current Interrupting	Certified for current interrupting at full-rated current (receptacle only)
Temperature Rise	Maximum 30° C temperature rise at full-rated current after 50 cycles of overload at 150% of rated current with direct current

Mechanical

PlugTail Connector Identification	#12 AWG, THHN, copper conductor, 6" leads, stripped, solid or stranded, for use with PlugTail Receptacles only
Product Identification	Ratings are a permanent part of the device

Environmental

Flammability	UL92 V2
Operating Temperature	Maximum continuous +60°C to, minimum -40°C without impact

PlugTail Receptacle Materials


Face	Nylon	Line Contacts	.036 688 Brass
Integral Ground System	.036 260 Brass	Auto Ground Clip	Steel
Back Body	PVC	Mounting Strap	.042 Zinc-Plated Steel
Assembly Drive Screw	Zinc-Plated Steel	Mounting Screws	Tri-Drive Steel
Tamper Shutter	Thermoplastic		

PlugTail Connector Materials


Housing	Polycarbonate	Contacts	.030 Brass
---------	---------------	----------	------------

Warranty


1 Year

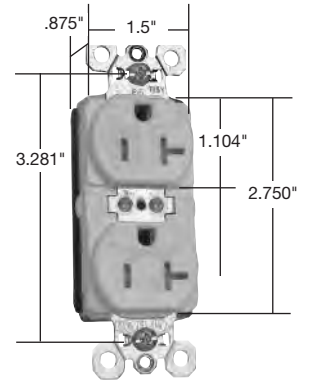

Dimensions for
15 & 20 Amp

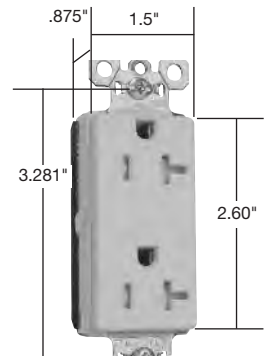

Dimensions for
15 & 20 Amp

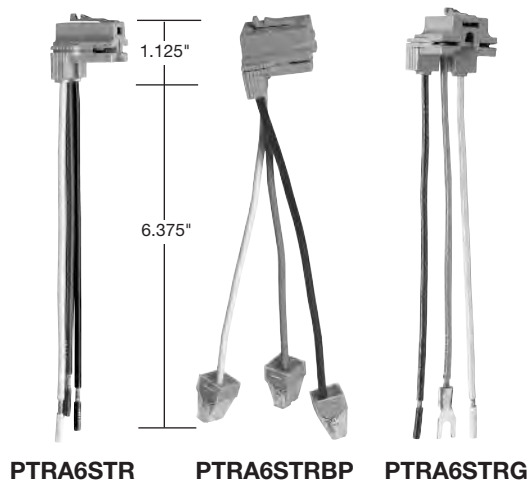

PTRA6STR


PTRA6STRBP

PTRA6STRG




15 & 20 Amp Split
Circuit Versions

COMPLEMENTARY DEVICES & ACCESSORIES

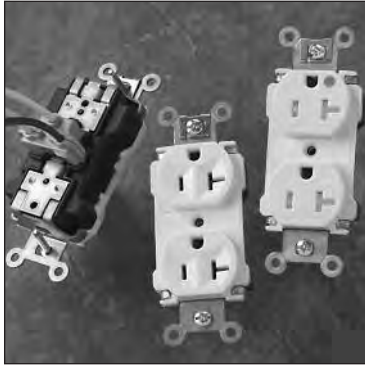


PLUGTAIL™ DEVICES

- Extra Heavy-Duty Spec Grade
- Extra Heavy-Duty Hospital Grade
- Extra Heavy-Duty Tamper-Resistant

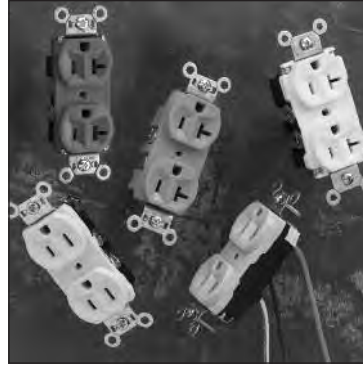


STRAIGHT BLADE RECEPTACLES

- Extra Heavy-Duty
- Heavy-Duty
- Hard Use
- Construction Grade
- Construction Grade Lead
- Commercial Grade

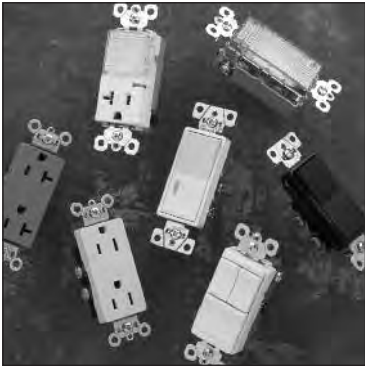


DECORATOR DEVICES

- Construction Grade Switches
- Specification Grade Combo Switches
- Construction Grade Receptacles
- Commercial Grade Receptacles
- Specification Grade Hallway Lights

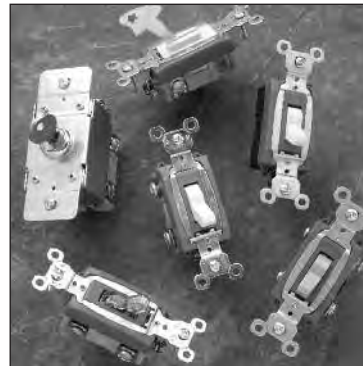

SWITCHES

- Heavy-Duty Toggle
- Heavy-Duty Lighted Toggle
- Heavy-Duty Security
- Heavy-Duty Locking
- Construction Grade Toggle
- Commercial Grade Toggle

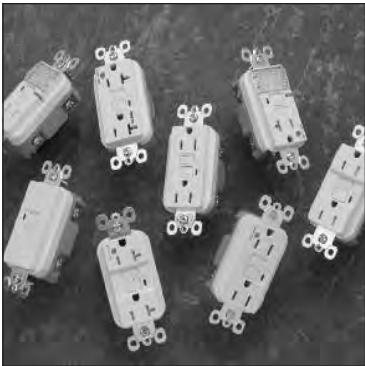

GFCIs

- Specification Grade



WALL PLATES

- TradeMaster® Thermoplastic Nylon
- Screwless Polycarbonate
- Stainless Steel
- Brass
- Aluminum
- Dustproof Stainless Steel Covers

ALSO AVAILABLE...

- | | | | |
|--------------------------------------|-------------------------------------|-------------------------------|----------------------------|
| ■ Hospital Grade Devices | ■ Straight Blade Plugs & Connectors | ■ Weatherproof Boxes & Covers | ■ Flexcor® Wire Mesh Grips |
| ■ TVSS & Isolated Ground Devices | ■ Turnlok® Locking Devices | ■ IEC 309 Industrial Products | ■ Bulk Solutions |
| ■ Ground Continuity Monitoring (GCM) | | | |



Legrand/Pass & Seymour
P.O. Box 4822
Syracuse, NY 13221-4822
800-223-4185

North America Headquarters
60 Woodlawn Street
West Hartford, CT 06110
Phone: 1.877.BY.LEGRAND (295.3472)
Fax: 1.860.232.2062
www.legrand.us

Legrand Canada
570 Applewood Crescent
Vaughan, ON, L4K 4B4
Phone: 905.738.9195
Fax: 905.738.9721
www.legrand.ca

