


Double-Ended Cordsets
BCC A325-A325-30-330-VS85N4-090
Order Code: BCC09UN

BALLUFF



4MT5
(CYJV CABLE ASSEMBLY)

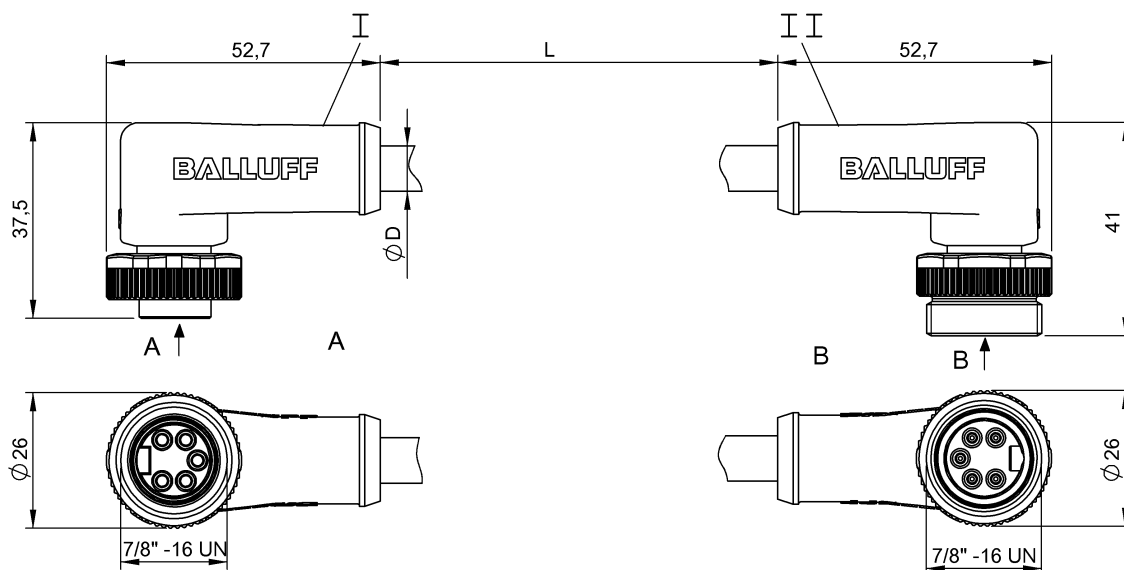

Electrical connection

Bending radius min., fixed cable	6 x D
Bending radius min., flexible cable	10 x D
Cable	PVC Shielded gray, 9.00 m
Cable diameter D	12.10 mm ±0.38 mm
Conductor cross-section	15 AWG/18 AWG
Connection 1	7/8"-Female, angled, 5-pin
Connection 2	7/8"-Male, angled, 5-pin
Number of conductors	4
System	Molded/Molded

Electrical data

Cable rated voltage AC max.	300 V
Cable rated voltage DC max.	300 V
Conductor construction	2x2 twisted-pair
Conductor resistance	≤ 6.9 Ohm/1000 ft
Coupling resistance max.	120 Ohm ±12 Ohm
Line attenuation at 1 MHz max.	0.40 dB/100 ft
Line attenuation at 125 kHz max.	0.13 dB/100 ft
Line attenuation at 500 kHz max.	0.25 dB/100 ft
Operating capacitance	12 pF/ft
Operating voltage Ub	300 VDC / 300 VAC
Rated current (40 °C)	9.0 A

Remarks

Bulk cable C&M CORP - P/N 56070 - DEVICENET™ E101876 15AWG 1/PR 18AWG 1/PR SHIELDED (UL) CL2 OR AWM LL33361 CSA AWM I/II A/B 80°C 300V T4

Enclosure rating per IEC 60529, only in screwed state with the associated mating piece.

Environmental conditions

Ambient temperature	-40...80 °C
IP rating	IP67, IP68/IP67, IP68

General data

Application	DeviceNet Thick
Approval/Conformity	cULus EAC WEEE


Material

Cable jacket material, note	Shielded
Cable jacket, material	PVC
Cable shield	Aluminum foil and copper braid
Material contact carrier	PUR/PUR
Material contacts	Brass/Brass
Material cover nut	Die-cast zinc/Die-cast zinc
Material grip	PUR/PUR

Mechanical data

Cable jacket, color	gray
Cable length L	9.00 m
Tightening torque pigtail	1.5 Nm/1.5 Nm

Connector Drawings



DeviceNet Output


PIN 1: shield

PIN 2: +24V

PIN 3: 0V

PIN 4: CAN H

PIN 5: CAN L



DeviceNet Input

PIN 1: shield


PIN 2: +24V

PIN 3: 0V

PIN 4: CAN H

PIN 5: CAN L

Wiring Diagrams

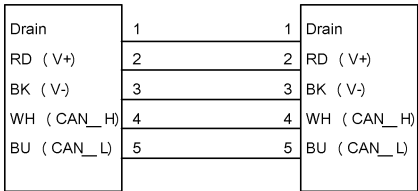

L