



Mechanical Cam Switches
BNS 819-D14-D12-100-10-FD
Order Code: BNS00P3

BALLUFF

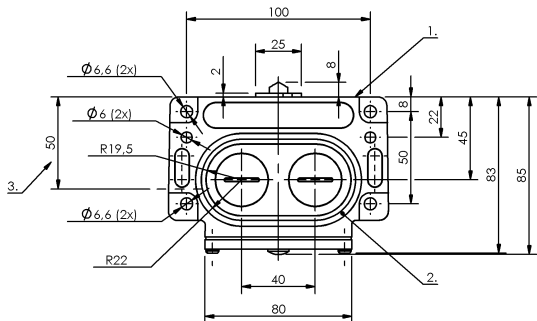

1) Reference edge, 2) Sealing ring, 3) Function indicator FD/FE/LL, 4) Cable passage

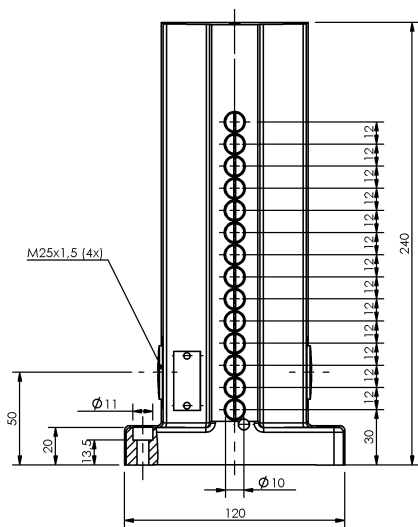

Display/Operation

Function indicator 1-14. Switch position: FD - 6...60 V

Electrical connection

Connection type 1-14. Switch position: Screw terminal

Electrical data

Continuous current 1-14. Switch position: 6 A
Rated operating voltage Ue 1-14. Switch position: 250 V AC
Switching function mechanical One NO and one NC galvanically isolated
Double-interrupting
Dual changeover
Switching rate 1-14. Switch position: 300/min

Environmental conditions

Ambient temperature -5...85 °C
IP rating IP67

Functional safety

B10d (EN ISO 13849-1) BSE 30.0: 30 mil. Switching operations

General data

Approval/Conformity CE
CSA
WEEE
Basic standard IEC 60947-5-1
DIN switch DIN 43697
Operating principle 1-14. Switch position: Mechanical
Version Snap contact

Material

Housing material Aluminum
Housing material, surface protection Anodized
Material contacts 1-14. Switch position: Silver, gold plated
Plunger material 1-14. Switch position: Stainless steel (1.4034)

Mechanical Cam Switches
BNS 819-D14-D12-100-10-FD
Order Code: BNS00P3

BALLUFF

Mechanical data

Approach direction	longitudinal, parallel to attachment surface
Approach speed	1-14. Switch position: 40 m/min
Dimension	120 x 240 x 85 mm
Distance cam - reference edge	1-14. Switch position: 4.50...5.00 mm
Flange, feed-through	2 threaded exit M25
Installation	Vertical
Life expectancy mechanical	1-14. Switch position: 30 million Switching operations

Number of switching positions	14x Chisel
Plunger spacing 1st switch position	30 mm
Plunger style	1-14th switch position: Chisel
Switch actuation force	1-14. Switch position: 20 N
Switching element	1-14. Switch position: BSE 30.0

Range/Distance

Reproducibility	1-14. Switch position: ± 0.002 mm
Switch position spacing	12 mm

Wiring Diagrams

BSE 30.0

