
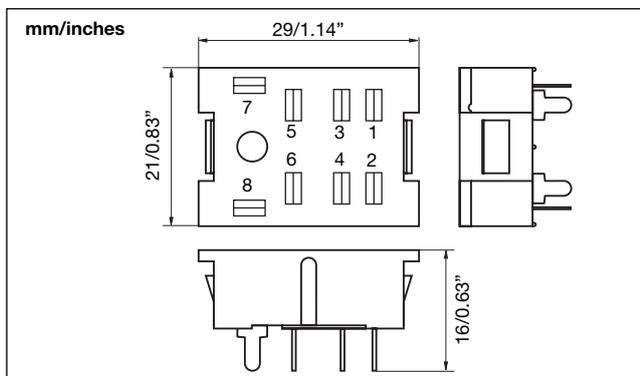


## Sockets for RPY Relays

### ZY 08

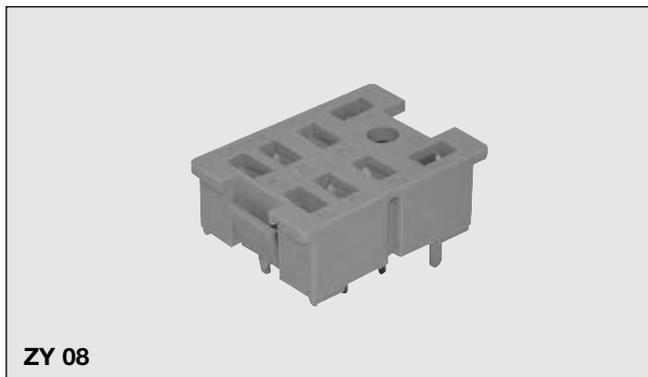

### General data

Rated voltage	300V
Rated current	16A
Insulation voltage	2kV
Operating temperature	-25° to +85°C (-13° to +185°F)
Socket material	ABS
Socket colour	RAL 7035 / Pantone 1C
Contact material	Copper tin plated CuSn <sub>6</sub>



### Approvals



Box content: 10 sockets  
 Box size: (W 125 x D 30 x H 25) mm Weight: 100g  
 (W 4.93 D 1.18 x H 0.98) inches Weight: 3.53oz

## Sockets for RPY Relays

### ZY 14

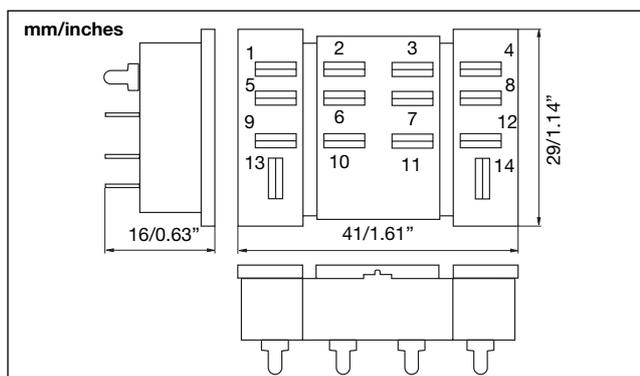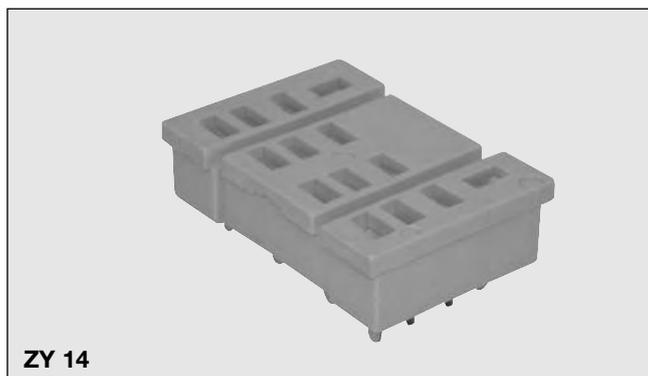

### General data

Rated voltage	300V
Rated current	16A
Insulation voltage	2kV
Operating temperature	-25° to +85°C (-13° to +185°F)
Socket material	ABS
Socket colour	RAL 7035 / Pantone 1C
Contact material	Copper tin plated CuSn <sub>6</sub>

### Approvals



Box content: 10 sockets  
 Box size: (W 125 x D 45 x H 30) mm Weight: 180g  
 (W 4.93 D 1.77 x H 1.18) inches Weight: 6.35oz