




1) Sensing surface, 2) Data carrier, 3) Clear zone, 4) Clear zone surrounding, 5) Tightening torque

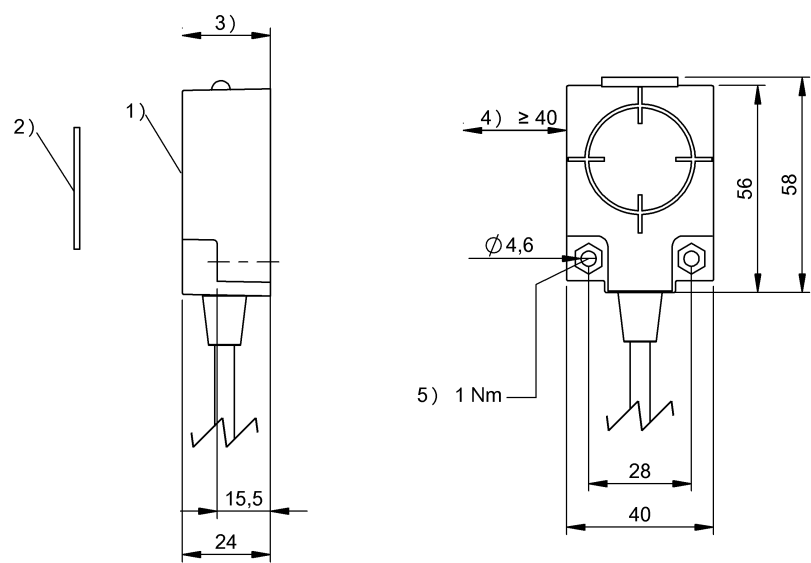

Display/Operation

Function indicator	RF field, LED red
	Power (ON), LED green
	COM field, LED yellow

Electrical connection

Connection	M12x1-Male, 8-pin
------------	-------------------

Electrical data

EN 300330-1	Power Class 5
Residual ripple max.	included

Environmental conditions

Continuous shock load	yes
EN 60068-2-27, Shock	yes
EN 60068-2-32 Free fall	yes
EN 60068-2-6, Vibration	yes
IP rating	IP67

Mechanical data

Application weight	345.00 g
Installation	metal-free (clear zone)

Output/Interface

Interface	RS232
-----------	-------