




1) Reference edge, 2) Anti-crystallization plunger, 3) Function indicator FD/FE/LL

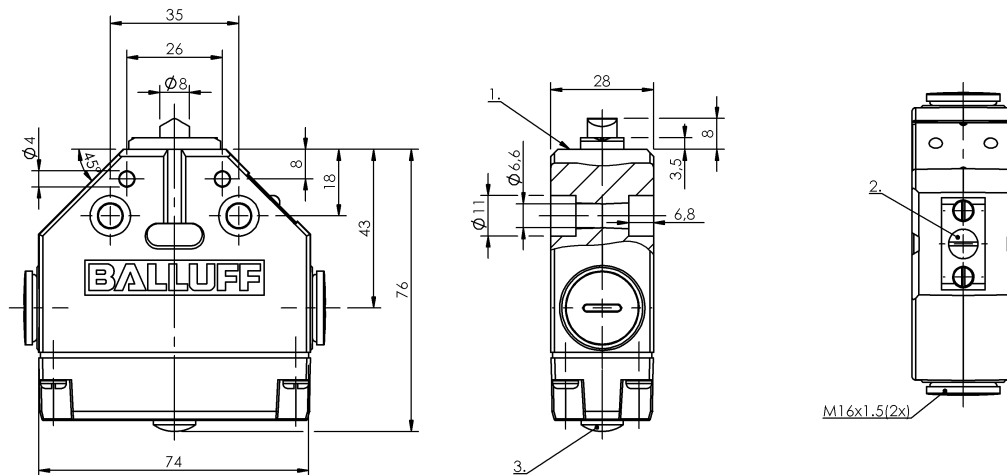

Display/Operation

Function indicator	1. Switch position: FE - 90...250 V
--------------------	-------------------------------------

Electrical connection

Connection type	1. Switch position: Screw terminal
-----------------	------------------------------------

Electrical data

Continuous current	1. Switch position: 6 A
Rated operating voltage Ue	1. Switch position: 250 V AC
Switching function mechanical	Dual changeover galvanically isolated One NO and one NC Double-interrupting
Switching rate	1. Switch position: 300/min

Environmental conditions

Ambient temperature	-5...85 °C
IP rating	IP67

Functional safety

B10d (EN ISO 13849-1)	BSE 30.0: 30 mil. Switching operations
-----------------------	--

General data

Approval/Conformity	CE CCC WEEE
Basic standard	IEC 60947-5-1
DIN switch	DIN 43693
Operating principle	1. Switch position: Mechanical
Version	Snap contact

Material

Housing material	Aluminum
Housing material, surface protection	Anodized
Material contacts	1. Switch position: Silver, gold plated
Plunger material	1. Switch position: Stainless steel (1.4034)

Mechanical Cam Switches
BNS 819-FE-60-101-FE
Order Code: BNS041Z

BALLUFF

Mechanical data

Approach direction	lateral or at right angles to mounting surface
Approach speed	1. Switch position: 30 m/min
Dimension	74 x 28 x 76.5 mm
Distance cam - reference edge	1. Switch position: 4.50...5.00 mm
Flange, feed-through	None
Installation	any
Life expectancy mechanical	1. Switch position: 30 million Switching operations

Number of switching positions	1x E-Chisel
Plunger spacing 1st switch position	14 mm
Plunger style	1st switch position: E-Chisel 1st switch position: E-Chisel
Switch actuation force	1. Switch position: 20 N
Switching element	1. Switch position: BSE 30.0

Range/Distance

Reproducibility	1. Switch position: ±0.002 mm
-----------------	-------------------------------

Wiring Diagrams

BSE 30.0

