

Split System Submittal Data

System: **E12RB4UW** Indoor: **CS-E12RB4UW** Outdoor: **CU-E12RB4U**

Job Name: _____
 Location: _____
 Engineer: _____
 Submitted to: _____
 Submitted by: _____
 Reference: _____

Approval: _____
 Date: _____
 Construction: _____
 Unit#: _____
 Drawing#: _____

General Data	
Power (V/P/Hz)	230/208/1/60
Circuit Ampacity (A)	15
Fuse Size, Max.(A)	15
Compressor	DC Twin Rotary (Inverter)
No. Used	1
Motor Type (No. of poles)	DC Brushless (4 poles)
Output Power	700w
Outdoor Unit	
Fan Type	Propeller
No. Speeds	Variable speed
Type Drive	Direct / DC Brushless Motor
No. Poles (RPM)	8-830
No. Motors (W)	1-40
CFM (Hi speed)	1095
Coil Type	Aluminum Fin and Copper Pipe
Fin Type - Pipe Type	Slit Fin
Rows x stage x F.P.I.	2 x 24 x 17
Indoor Unit	
Fan Type	Backward Fan
Motor Type, No. of Poles	DC Brushless, 8 poles
No. Speeds	Variable speed
RPM (Cool / Heat), High	600/650
No. Motors (W)	1-47
CFM (Qlo/Lo/Me/Hi/SHi) Cooling	240/260/310/370/400
CFM (Qlo/Lo/Me/Hi/SHi) Heating	270/300/350/390/410
Operating Sound-Hi/Me/Lo/ dB-A	38/28/25
Coil Type	Aluminum Plate Fin & Copper Tube
Fin Type - Pipe Type	Coated Slit Plate - Inner Rifled
Row x stage x FPI	2 x 10 x 18
Drain Connection Size (in.)	3/4"
Refrigerant	R410A
Oz - R410a (outdoor unit)	34.6
Refrigerant Control	Electronic Expansion Valve
Refrigerant Tubing Connections	Flare
Line Length, Max (ft.)	65.6
Elevation Difference, Max (ft.)	49.2
Line Size (in. O.D. Discharge)	1/4"
Line Size (in. O.D. Suction)	1/2"
Pre-charge, tubing length at shipment	24.6'



Dimensions (HxWxD)	
Indoor Unit (Crated) (in.)	13-3/8 x 27-3/16 x 27-3/16
Indoor Unit (Uncrated) (in.)	10-1/4 x 22-21/32 x 22-21/32
Outdoor Unit (Crated) (in.)	23-15/32 x 36-9/32 x 16-13/32
Outdoor Unit (Uncrated) (in.)	21-9/32 x 30-23/32 x 11-13/32
Panel (Crated)	3-23/32 x 29-5/16 x 28-29/32
Panel (Uncrated)	2-1/32 x 27-9/16 x 27-9/16
Weight (lbs.)	
(Indoor) Net	40lb
(Outdoor) Net	82lb
(Panel) Net	6lb


Performance Data @ ARI Standard Conditions	
Cooling	
Total Capacity (BTU/H)	11,900 (4,100-13,300)
Sensible Capacity (BTU/H)	11,170
Latent Capacity (BTU/H)	730
SEER	18
Dehumidification (Pints/H)	4
Amps (A)	5.2
Power Inputs (W)	1150
Outdoor Sound Rating (dB-A)	66
Heating	
Total Capacity (BTU/H)	13,600 (4,100-16,300)
HSPF	9
Amps (A)	6.1
Power Inputs (W)	1360
Outdoor Sounds Rating (dB-A)	66

Features	
Controls	Microprocessor
Remote Controller	LCD Wireless Type included as standard
Wired Remote Controller	CZ-RD52CU
Temperature Control	IC Thermistor
Timer	Single Event Daily ON/OFF TIMER
Quiet mode	Included
High Power mode	Included
Air Louver, Horizontal	Manual
Air Louver, Vertical	Automatic, Sweep, Step
Power Failure Automatic Restart	Built-In
Heating/Cooling Automatic Changeover	Built-In
Self-Diagnosis	Built-In
Air Filter	Washable, One-touch


Operating Range	Indoor Air Intake Temp	Outdoor Air Intake Temp
Cooling (Max)	89.6F DB/73.4F WB	114.8F DB
Cooling (Min)	60.8F DB/51.8F WB	0F DB
Heating (Max)	86.0F DB	75.2F DB
Heating (Min)	60.8DB	5F DB



Indoor Dimensions

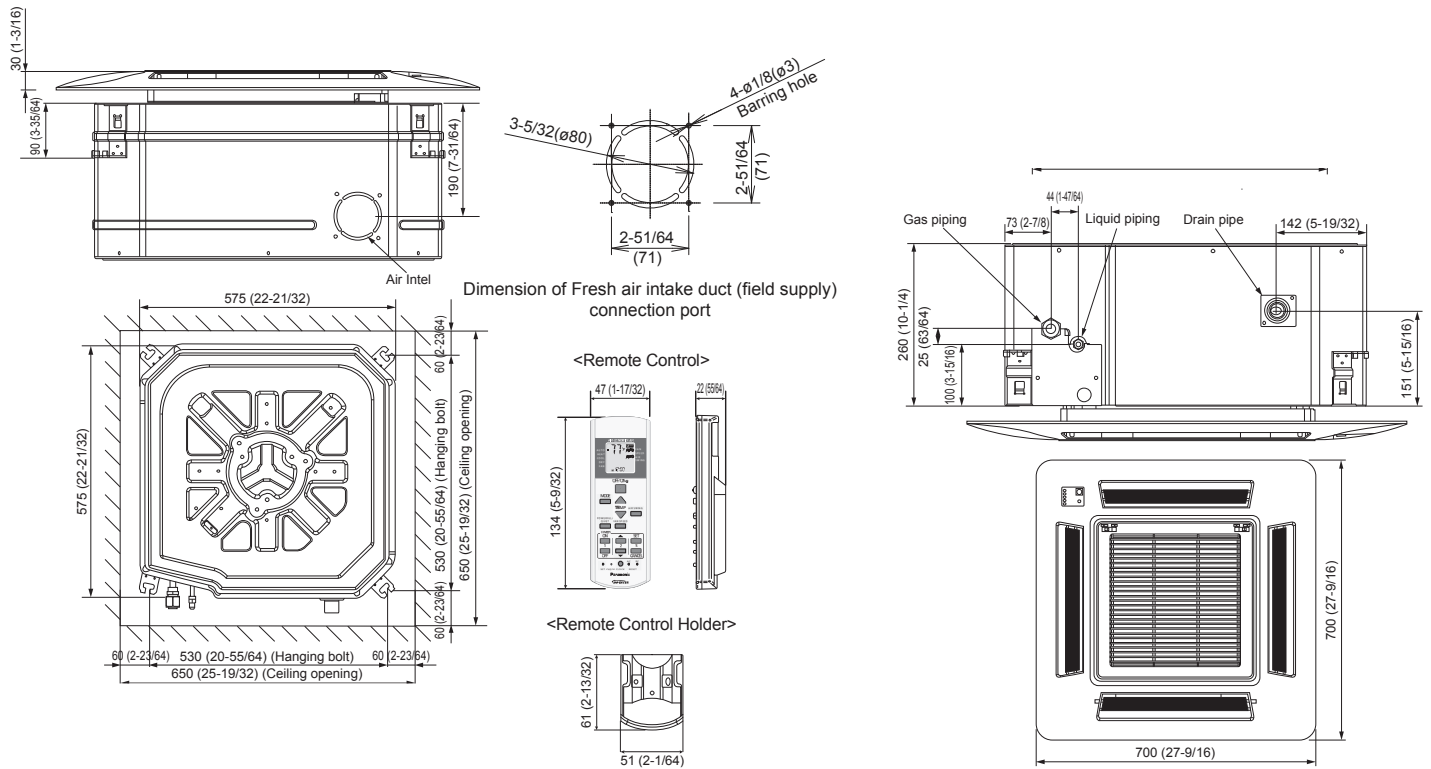

Outdoor Dimensions

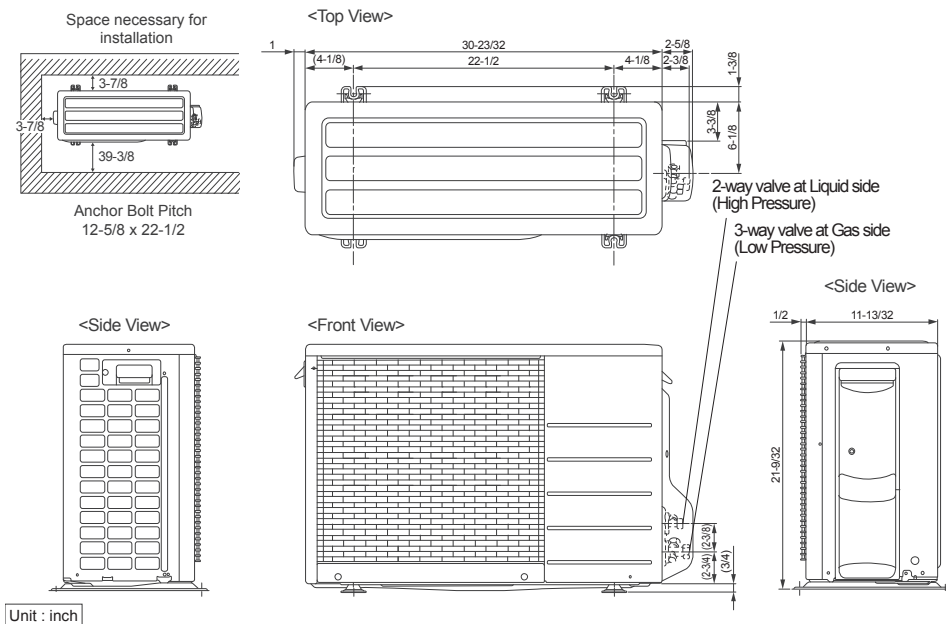

Panasonic

Panasonic North America
Air Conditioning Division
1690 Roberts Blvd., NW, Suite 110
Kennesaw, GA 30144
us.panasonic.com/aircon