

SUBMITTAL SHEET

JOB NAME	ITEM TAG
JOB LOCATION	PART NUMBER
CONTRACTOR	DATE
ENGINEER APPROVAL	DATE

INSERTED BONNET GATE VALVE

Model T-751

600 W.O.G. Non-shock

Working Pressure, Non Shock (PSI)

Cold working pressure (CWP):

Saturated steam (WSP): 125

**Pictured
Model T-751**




MATERIAL SPECIFICATION

PART	MATERIAL	SPECIFICATION
1 Body	S.S.	316
2 Bonnet	S.S.	316
3 Stem	S.S.	304
4 Packing nut	S.S.	304
5 Packing gland	S.S.	304
6 Stem packing	PTFE	DUPONT TEFLON
7 Disc	316 S.S.	316
8 Handwheel	Cast iron	JIS ZZ2202
9 Handwheel nut	Steel	304

*Teflon is a registered trademark of Dupont

**Pictured
Model
T-751
Cut-away**

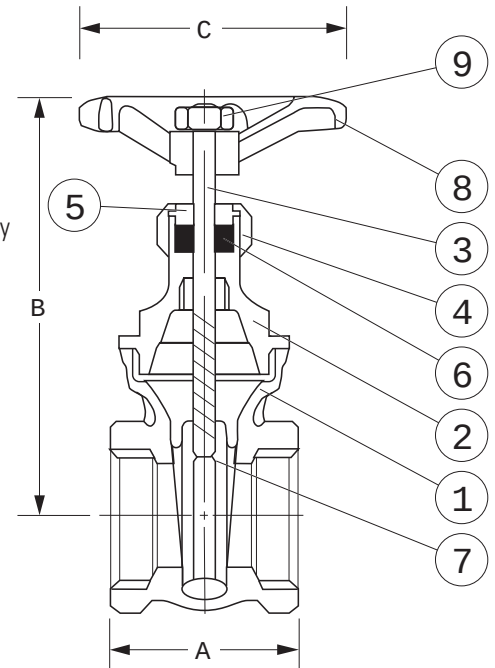

DIMENSIONS

Size	A	B	C
1/2"	2.21	3.97	2.43
3/4"	2.42	4.12	2.43
1"	2.75	4.35	2.95
1-1/4"	3.05	5.25	2.95
1-1/2"	3.21	6.00	3.37
2"	3.75	6.5	3.37